

**DGR Dual Gamma Ray
ALD Azimuthal Lithodensity
XCAL Azimuthal Acoustic Caliper**

PROPRIETARY

1 : 240

Country : USA		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer		Rig : Polar Pioneer	
Field : Posey 6912		Well : OCS-Y-2321 BJ001 ST00BP00		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer	
Location : Lat: 71° 10' 24.06" North Long: 163° 28' 18.67" West		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer		Rig : Polar Pioneer	
Well : OCS-Y-2321 BJ001 ST00BP00		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer		Rig : Polar Pioneer	
Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer	
Rig : Polar Pioneer		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer		Rig : Polar Pioneer	
Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer	
Well : OCS-Y-2321 BJ001 ST00BP00		Rig : Polar Pioneer		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer	
Field : Posey 6912		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer		Rig : Polar Pioneer	
Country : USA		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer		Rig : Polar Pioneer	
API Number : 55-352-00004-00		Company : Shell Gulf of Mexico Inc.		Rig : Polar Pioneer		Rig : Polar Pioneer	
LOCATION				Other Services			
Latitude : 71° 10' 24.06" North				PWD, DDSr			
Longitude : 163° 28' 18.67" West				MRL-WD			
Final UTM Easting = 555,034.550 m				Elev. KB N/A			
Final UTM Northing = 7,897,425.308 m				DF 76.00 ft			
Elevation : 0.00 ft				GL N/A			
Drilling Measured From : Drill Floor				WD 146.00 ft			
Permanent Datum : Mean Sea Level				Job No. : AK-XX-0901604700			
Log Measured From : Drill Floor				Unit No. : 1			
Drilling Measured From : Drill Floor				Plot Type : Final			
Depth Logged : 222.00 ft To 6,795.34 ft				Plot Date : 01-Nov-15			
Date Logged : 30-Jul-15 To 21-Sep-15							
Total Depth M/D : 6,800.00 ft TVD : 6,795.34 ft							
Spud Date : 30-Jul-15							
Run No.		Borehole Record (TVD)		Size		Casing Record (TVD)	
1		8,500 in		222.00 ft		1,511.97 ft	
5		17,500 in		1,511.97 ft		2,962.86 ft	
6		12,250 in		2,962.86 ft		5,421.17 ft	
7		8,500 in		5,421.17 ft		6,795.34 ft	

WELL INFORMATION

MWD Run Number	100	600	700
Date run completed	01-Aug-15	14-Sep-15	22-Sep-15
Rig Bit Number	1	6	7
Bit Size (in)	8.500	12.250	8.500
Tool Nominal OD (in)	6.75	8.000	6.750
Log Start Depth (TVD, ft)	222.00	2,962.86	5,421.17
Log End Depth (TVD, ft)	1,511.97	5,421.17	6,795.34
Drill or Wipe	Drill	Drill	Drill
Drill/Wipe Start Date and Time	30-Jul-15 17:05	12-Sep-15 01:20	20-Sep-15 08:52
Drill/Wipe End Date and Time	01-Aug-15 11:21	13-Sep-15 16:35	21-Sep-15 23:09
Min Inc (deg) @ Depth (TVD, ft)	0.00 @ 0.00	0.58 @ 3,074.40	3.42 @ 5,977.80
Max Inc (deg) @ Depth (TVD, ft)	0.51 @ 320.88	3.70 @ 5,297.46	3.99 @ 6,740.52
Bit TFA(in2) / Bit Type	0.71 / Tricone	0.99 / PDC	0.55 / PDC
Flow Rate (gpm)	449.40	828.00	550.00
Max AV (fpm) / CV (fpm) @ MWD	774.0 / 984.0	239.0 / 357.0	549.0 / 1,000.0
Fluid Type	Sea Water	Polymer	Polymer
Density (ppg) / Viscosity (spqt)	8.55 / 27.00	11.40 / 56.00	12.00 / 79.00
Filtrate CL (ppm)	35,000.00	100,000.00	135,000.00
pH / Fluid Loss (mptm)	8.50 / 0	9.10 / 4	9.30 / 6
PV (cP) / YP (lhf2)	17 / 31.00	20 / 27.00	23 / 33.00
% Solids / % Sand	.01 / .01	16 / 0.5	18 / 0.5
% Oil / Oil:Water Ratio	0 / 0:100	0 / 0:84	0 / 0:79
Rm @ Measured Temp (degF)	0.350 @ 35.60	0.080 @ 88.00	0.070 @ 70.00
Rmf @ Measured Temp (degF)	N/A @ N/A	0.050 @ 88.00	0.060 @ 70.00
Rmc @ Measured Temp (degF)	N/A @ N/A	0.120 @ 88.00	0.140 @ 70.00
Max Tool Temp (degF) / Source	42.60 / HCIM	144.94 / HCIM	152.00 / HCIM

Rm @ Max Tool Temp (degF)	0.3004 @ 42.60	0.0849 @ 144.94	0.0338 @ 152.00		
Lead MWD Engineer	Nick Weeks	Jack Kleinhans	Jack Kleinhans		
Customer Representative	Doug Sloan	Matt Cazalet	Scott Lapiene		

SENSOR INFORMATION

Downhole Processor Information

Tool Type	HCIM	HCIM	HCIM		
Software Version	88.58	88.58	88.58		
Sub Serial Number	12272466	11902800	11320539		
Insert Serial Number	14776659	12136690	11752800		
Date and Time Initialized	30-Jul-15 10:14	11-Sep-15 01:12	19-Sep-15 15:17		
Date and Time Read	01-Aug-15 18:48	18-Sep-15 18:26	25-Sep-15 08:40		
ECMB SW Version	N/A	N/A	generic 1.1.1 Linux 2.6.23.1		

Directional Sensor Information

Tool Type	PCDC	PCDC	PCDC		
Distance From Bit (ft)	16.80	56.82	48.80		
Software Version	6.33	6.33	6.33		
Sub Serial Number	12510194	12606713	12460872		
Sonde Serial Number	12059421	12059488	11902192		
Sensor ID Number	N/A	N/A	N/A		
Toolface Offset (deg)	0.00	208.54	301.32		

Gamma Ray Sensor Information

Tool Type	DGR	DGR	DGR		
Distance From Bit (ft)	6.67	37.22	38.40		
Recorded Sample Period (sec)	14	10	10		
Software Version	N/A	N/A	N/A		
Sub Serial Number	12519619	11651705	12519617		
Insert/Sonde Serial Number	12464236	12351708	12041832		

Density Sensor Information

Tool Type	ALD	ALD	ALD		
Distance From Bit (ft)	79.17	87.77	113.16		
Recorded Sample Period (sec)	14	10	10		
Software Version	3.13	3.12	3.12		
Sub Serial Number	12522518	12279568	10853150		
Insert Serial Number	12541284	10718012	11496392		
Sensor ID Number	32767	32767	2		
Source Serial Number	46836B	39634B	39364b		
Pin Orientation	Down	Down	Down		
Stabilizer Blade O.D. (in)	8.25	11.90	8.20		
DPA Offset	135.00	45.00	135.00		

XBAT Sensor Information

Tool Type	XBAT	XBAT	XBAT		
Dist from Bit	32.85	130.62	64.79		
Recorded Sample Period	20	15	15		
Electronics Insert SN	11215931	12451413	12465296		
Receiver Insert SN	12267657	12405002	12565577		
Transmitter Insert SN	10603805	12277635	12280476		
Collar SN	12323024	12389351	102064794		
CBM SSProg Version	ssprog 1.0.9-1	ssprog 1.0.9-1	ssprog 1.0.9-1		
CBM Supprt Version	support 1.9.2-1	support 1.9.2-1	support 1.9.2-1		
XBAT Version	xbat 1.2.7-1	xbat 1.2.7-1	xbat 1.2.7-1		

XBAT Caliper ARM Version	122.00	122.00	122.00		
TCM Version	20.08	20.08	20.08		
QXCB DSP Version	52.00	52.00	52.00		
QXDAQ ARM Version	142.00	142.00	121.00		
DAQ DSP Version	53.00	53.00	53.00		
Sequence File Version	120829	131212	131212		
Sequence Selected	13:M9_D5_Q5	8:M9_D9_D4	8:M9_D9_D4		

REMARKS

1. ALL DEPTHS ARE MEASURED DEPTHS (MD), UNLESS OTHERWISE NOTED. THESE DEPTHS ARE BIT DEPTHS AND ARE CALIBRATED TO THE DRILLERS PIPE TALLY. NO DEPTH CORRECTIONS HAVE BEEN MADE FOR PIPE STRETCH OR COMPRESSION.
2. ALL VERTICAL DEPTHS ARE TRUE VERTICAL DEPTHS (TVD), UNLESS OTHERWISE NOTED. ONLY INVERTED / REVERTED SECTIONS GREATER THAN 30' TVD ARE PRESENTED
3. ALL DATA PRESENTED IS RECORDED DATA UNLESS OTHERWISE STATED.
4. LWD RUN 1 WAS COMPRISED OF DIRECTIONAL, DUAL GAMMA RAY (DGR) UTILIZING GEIGER-MUELLER TUBE TYPE DETECTORS, AZIMUTHAL DEEP ELECTROMAGNETIC WAVE RESISTIVITY (ADR), PRESSURE WHILE DRILLING (PWD) DRILLSTRING DYNAMICS SENSOR (DDSr), AZIMUTHAL LITHODENSITY (ALD), COMPENSATED THERMAL NEUTRON (CTN), MAGNETIC RESONANCE WHILE DRILLING (MRIL-WD), AZIMUTHAL BIMODAL ACOUSTIC TOOL (XBAT), AND THE AZIMUTHAL ACOUSTIC CALIPER TOOL (XCAL).
5. RUN 200 WAS A 36" HOLE OPENING RUN, RUN 300 WAS A 42" HOLE OPENING RUN, RUN 400 WAS A CLEANOUT RUN TO DRILL OUT THE SHOE TRACK AND 30' OF NEW FORMATION. NO LWD SENSORS WERE UTILIZED. THEREFOR THEY ARE NOT PRESENTED.
6. MWD RUN 500 WAS A 17.5" DRILLING RUN UTILIZING DIRECTIONAL AND PWD. NO LOGGING SENSORS WERE PRESENT, ONLY ROP IS PRESENTED.
7. LWD RUN 6 WAS COMPRISED OF DIRECTIONAL, DUAL GAMMA RAY (DGR) UTILIZING GEIGER-MUELLER TUBE TYPE DETECTORS, ELECTROMAGNETIC WAVE RESISTIVITY PHASE 4 (EWR-P4), PRESSURE WHILE DRILLING (PWD) DRILLSTRING DYNAMICS SENSOR (DDSr), AZIMUTHAL LITHODENSITY (ALD), COMPENSATED THERMAL NEUTRON (CTN), AZIMUTHAL BIMODAL ACOUSTIC TOOL (XBAT), AND THE AZIMUTHAL ACOUSTIC CALIPER TOOL (XCAL).
8. LWD RUN 7 WAS COMPRISED OF DIRECTIONAL, DUAL GAMMA RAY (DGR) UTILIZING GEIGER-MUELLER TUBE TYPE DETECTORS, AZIMUTHAL DEEP ELECTROMAGNETIC WAVE RESISTIVITY (ADR), PRESSURE WHILE DRILLING (PWD) DRILLSTRING DYNAMICS SENSOR (DDSr), AZIMUTHAL LITHODENSITY (ALD), COMPENSATED THERMAL NEUTRON (CTN), MAGNETIC RESONANCE WHILE DRILLING (MRIL-WD), AZIMUTHAL BIMODAL ACOUSTIC TOOL (XBAT), AND THE AZIMUTHAL ACOUSTIC CALIPER TOOL (XCAL).
9. OVER THE COURSE OF THE 12.25" HOLE SECTION THERE ARE SEVERAL INSTANCES WHERE THE BOREHOLE RUGOSITY HAS CREATED "SPIKES" IN THE RESISTIVITY DATA. THIS IS DUE TO ONE RECIEVER READING THE HIGH SALINITY BOREHOLE FLUID (WASHOUT) AND THE OTHER READING THE FORMATION. THERE ARE ALSO AREAS ACROSS THE LOGGED INTERVAL THAT SHOW AN UNDERGAUGE HOLE.
10. LWD RUN 100 XBAT WAS SETUP TO FIRE 3 DIFFERENT ACTIVATIONS. ACTIVATION 1 WAS A 9KHz MONOPOLE FIRING, ACTIVATION 2 WAS A 5KHz DIPOLE FIRING, AND ACTIVATION 3 WAS A 5KHz QUADRAPOLE. THE XCAL WAS SAMPLED BEFORE AND AFTER EACH OF THESE ACTIVATIONS.
11. REGARDING THE LWD RUN 100 XCAL LOG, THIS HOLE SECTION WAS DRILLED RISERLESS, THERE WAS NOT A POINT AT WHICH THE XCAL COULD HAVE BEEN QUANTITATIVLY CALIBRATED. CALIBRATION IS PERFORMED INSIDE CASING PRIOR TO DRILLING AHEAD, AND POST RUN AS A SECONDARY VERIFICATION THAT THE MUD SYSTEM PROPERTIES HAVE NOT CHANGED. AS SUCH, A QUALITATIVE CALIBRATION HAS BEEN MADE OVER SEVERAL SECTIONS OF THE LOG WHERE THERE IS LITTLE CHANGE INFORMATION PROPERTIES. ALD HSI HAS BEEN USED AS A SECONDARY VERIFICATION TO MAKE SURE THE CALIBRATION IS REASONABLE. A FLUID VELOCITY OF 220μSECS/FT HAS BEEN USED IN THE XCAL PROCESSING OF THIS HOLE SECTION.
12. LWD RUN 600 XBAT WAS SETUP TO FIRE 3 DIFFERENT ACTIVATIONS. ACTIVATION 1 WAS A 9KHz MONOPOLE FIRING, ACTIVATION 2 WAS A 9KHz DIPOLE FIRING, AND ACTIVATION 3 WAS A 4KHz DIPOLE. THE XCAL WAS SAMPLED BEFORE

AND AFTER EACH OF THESE ACTIVATIONS. A CASING CALIBRATION WAS PERFORMED AND A FLUID VELOCITY OF 191μSECS/FT HAS BEEN USED IN THE XCAL PROCESSING OF THIS HOLE SECTION.

13. LWD RUN 700 XBAT WAS SETUP TO FIRE 3 DIFFERENT ACTIVATIONS. ACTIVATION 1 WAS A 9KHz MONOPOLE FIRING, ACTIVATION 2 WAS A 9KHz DIPOLE FIRING, AND ACTIVATION 3 WAS A 4KHz DIPOLE. THE XCAL WAS SAMPLED BEFORE AND AFTER EACH OF THESE ACTIVATIONS. A CASING CALIBRATION WAS PERFORMED AND A FLUID VELOCITY OF 209μSECS/FT HAS BEEN USED IN THE XCAL PROCESSING OF THIS HOLE SECTION.

14. ALL XCAL WAVEFORMS WERE SAMPLED AT 0.32μSECS INTERVALS.

15. RUNS 1- 7 REPRESENT THE OCS-Y-2321 BJ001 ST00BP00 WELL WITH AN API# OF 55-352-00004-00. THIS WELL REACHED A TOTAL DEPTH OF 6,800'MD / 6,795'TVD

MNEMONICS	CURVE DESCRIPTION
ROPA	AVERAGE RATE OF PENETRATION
DGRCC	DGR COMBINED GAMMA RAY BC
ARH16PC	ADR AVERAGE 2mhz 16" PHASE RESISTIVITY BC
ARH32PC	ADR AVERAGE 2mhz 32" PHASE RESISTIVITY BC
ARH48PC	ADR AVERAGE 2mhz 48" PHASE RESISTIVITY BC
R09PC	EWR AVERAGE 2mhz 09" PHASE RESISTIVITY BC
R15PC	EWR AVERAGE 2mhz 15" PHASE RESISTIVITY BC
R27PC	EWR AVERAGE 2mhz 27" PHASE RESISTIVITY BC
R39PC	EWR AVERAGE 2mhz 39" PHASE RESISTIVITY BC
ADXT	ADR FORMATION EXPOSURE TIME
EWXT	EWR FORMATION EXPOSURE TIME
TNPS	CTN NEUTRON POROSITY - SANDSTONE
ALCDLC	ALD LOW COUNT RATE BIN DENSITY
ALDCLC	ALD LOW COUNT RATE BIN STAND OFF CORRECTION
ALPELC	ALD LOW COUNT RATE BIN PHOTOELECTRIC FACTOR
XBEDA	XCAL EQUIVALENT HOLE DIAMETER
XBVPVS	XBAT VP/Vs RATIO
XBCS	XBAT COMPRESSIONAL SLOWNESS
XBCSS	XBAT COMBINED SHEAR SLOWNESS
XBDFX	XBAT DIPOLE FLEXURAL SLOWNESS
XBSFLAG	XBAT SHEAR FLAG

PARAMETERS USED IN LOG PROCESSING:

HOLE SIZE:	FIXED @ 8.50" AND 12.25"
MUD WEIGHT:	8.6 – 12.0 PPG
WHOLE MUD CHLORIDES:	18,000 PPM Cl- R100, 100,000-125,000 PPM Cl-
FORMATION WATER SALINITY:	21,200 PPM Cl-
FLUID DENSITY:	1.0 g/cc
MATRIX DENSITY:	2.65 g/cc
LITHOLOGY:	SANDSTONE

ALL 1:1200 DATA CURVES ARE PRESENTED AT A STEP OF 1.0', AND SMOOTHED OVER A 3.0' WINDOW. GAP FILL IS SET TO 5'. ALL 1:240 DATA CURVES ARE PRESENTED AT A STEP OF 0.5 FT, WITH A WINDOW OF 0.6FT EXCEPT THE ACOUSTIC CURVES, THEY ARE SMOOTHED TO A STEP OF 0.5 WITH A 1.2FT WINDOW. GAP FILL IS SET TO 3FT FOR ALL CURVES.


WARRANTY


HALLIBURTON WILL USE ITS BEST EFFORTS TO FURNISH CUSTOMERS WITH ACCURATE INFORMATION AND INTERPRETATIONS THAT ARE PART OF, AND INCIDENT TO, THE SERVICES PROVIDED. HOWEVER, HALLIBURTON CANNOT AND DOES NOT WARRANT THE ACCURACY OR CORRECTNESS OF SUCH INFORMATION AND INTERPRETATIONS. UNDER NO CIRCUMSTANCES SHOULD ANY SUCH INFORMATION OR INTERPRETATION BE RELIED UPON AS THE SOLE BASIS FOR ANY DRILLING, COMPLETION, PRODUCTION, OR FINANCIAL DECISION OR ANY PROCEDURE INVOLVING ANY RISK TO THE SAFETY OF ANY DRILLING VENTURE, DRILLING RIG OR ITS CREW OR ANY OTHER THIRD PARTY. THE CUSTOMER HAS FULL RESPONSIBILITY

FOR ALL DRILLING, COMPLETION AND PRODUCTION OPERATION. HALLIBURTON MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO THE SERVICES RENDERED. IN NO EVENT WILL HALLIBURTON BE LIABLE FOR FAILURE TO OBTAIN ANY PARTICULAR RESULTS OR FOR ANY DAMAGES, INCLUDING, BUT NOT LIMITED TO, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES, RESULTING FROM THE USE OF ANY INFORMATION OR INTERPRETATION PROVIDED BY HALLIBURTON.

LWD R100 - 8.50" PILOT HOLE

XCAL Ellipse Avg Diameter inches	6.5	16.5
DGR Comb Gamma Ray BCo api	0	150
ALD Hole Size Indicator inches	6.5	16.5
Hole Enlargement	<div style="display: flex; justify-content: space-between;"> <div style="text-align: center;">Under</div> <div style="text-align: center;">Minor <1"</div> <div style="text-align: center;">Medium 1"-2"</div> <div style="text-align: center;">Severe >2"</div> </div>	
TVD ft	1 : 240	
XCAL Image	4 Inches 5	
XCAL 3D Plot Trace South	4	5
XCAL 3D Plot Trace North	4	5
XCAL Max Ellipse Diameter		
XCAL Min Ellipse Diameter		

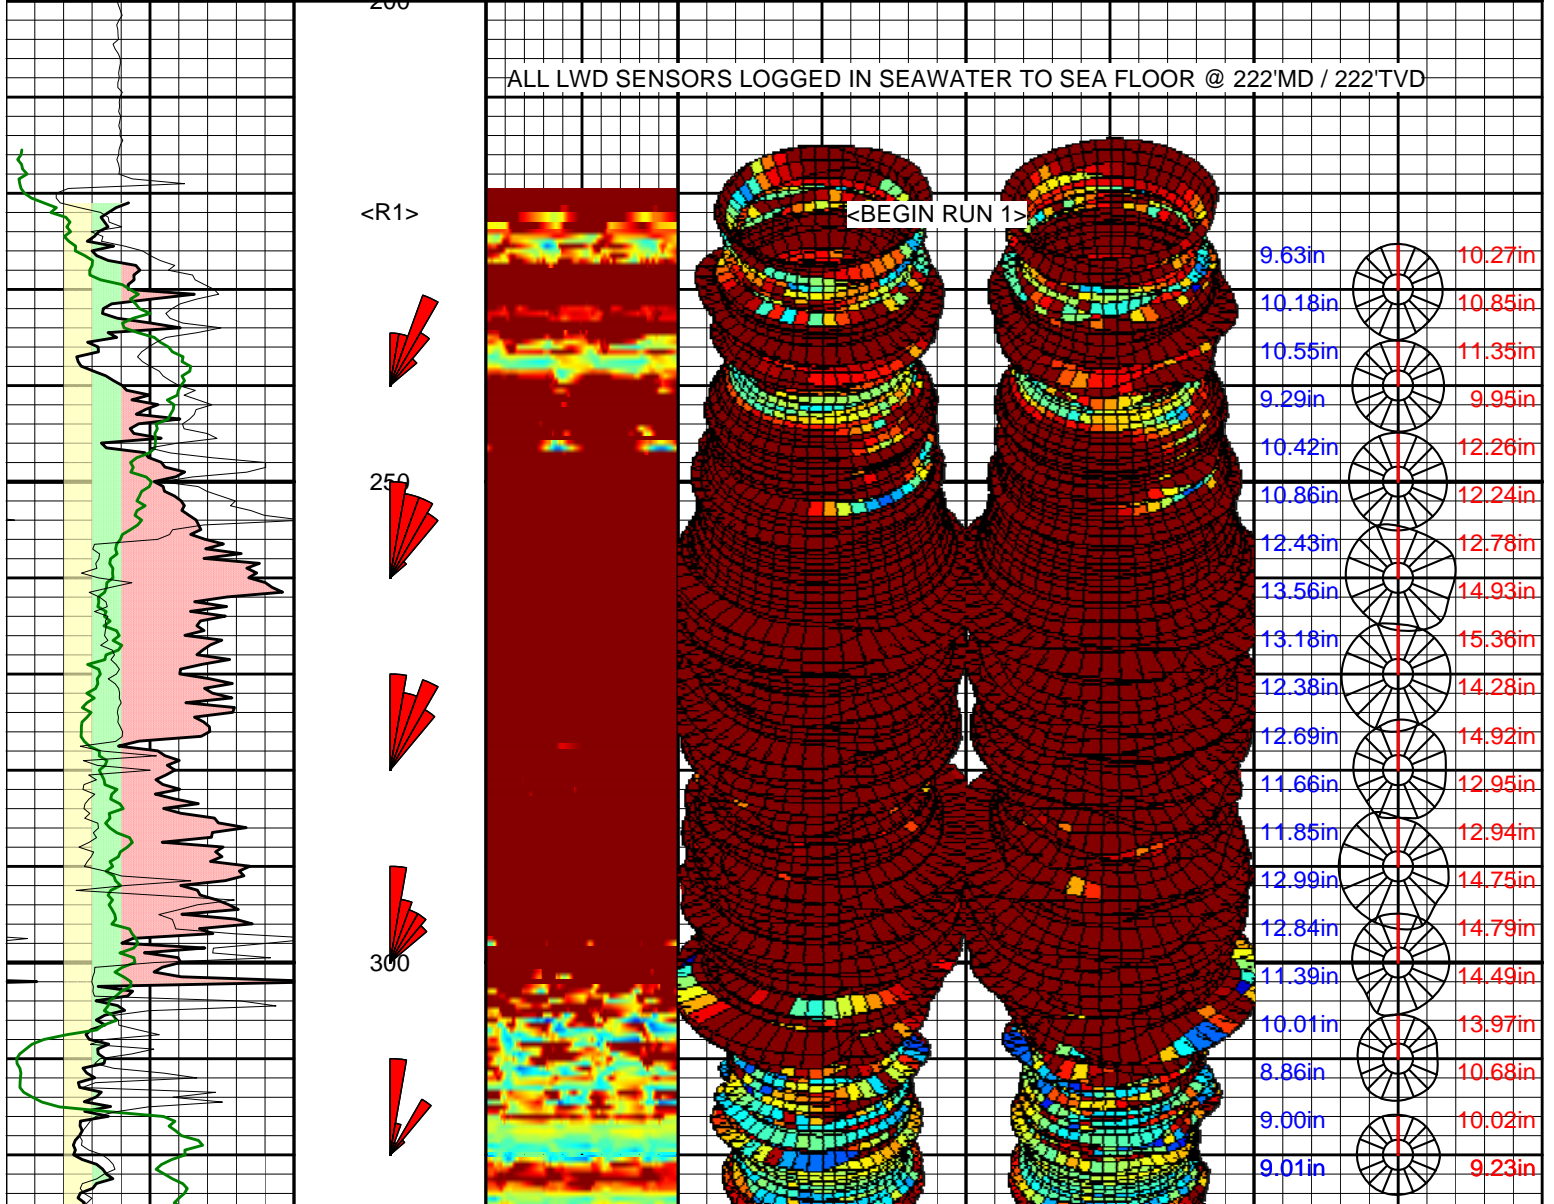


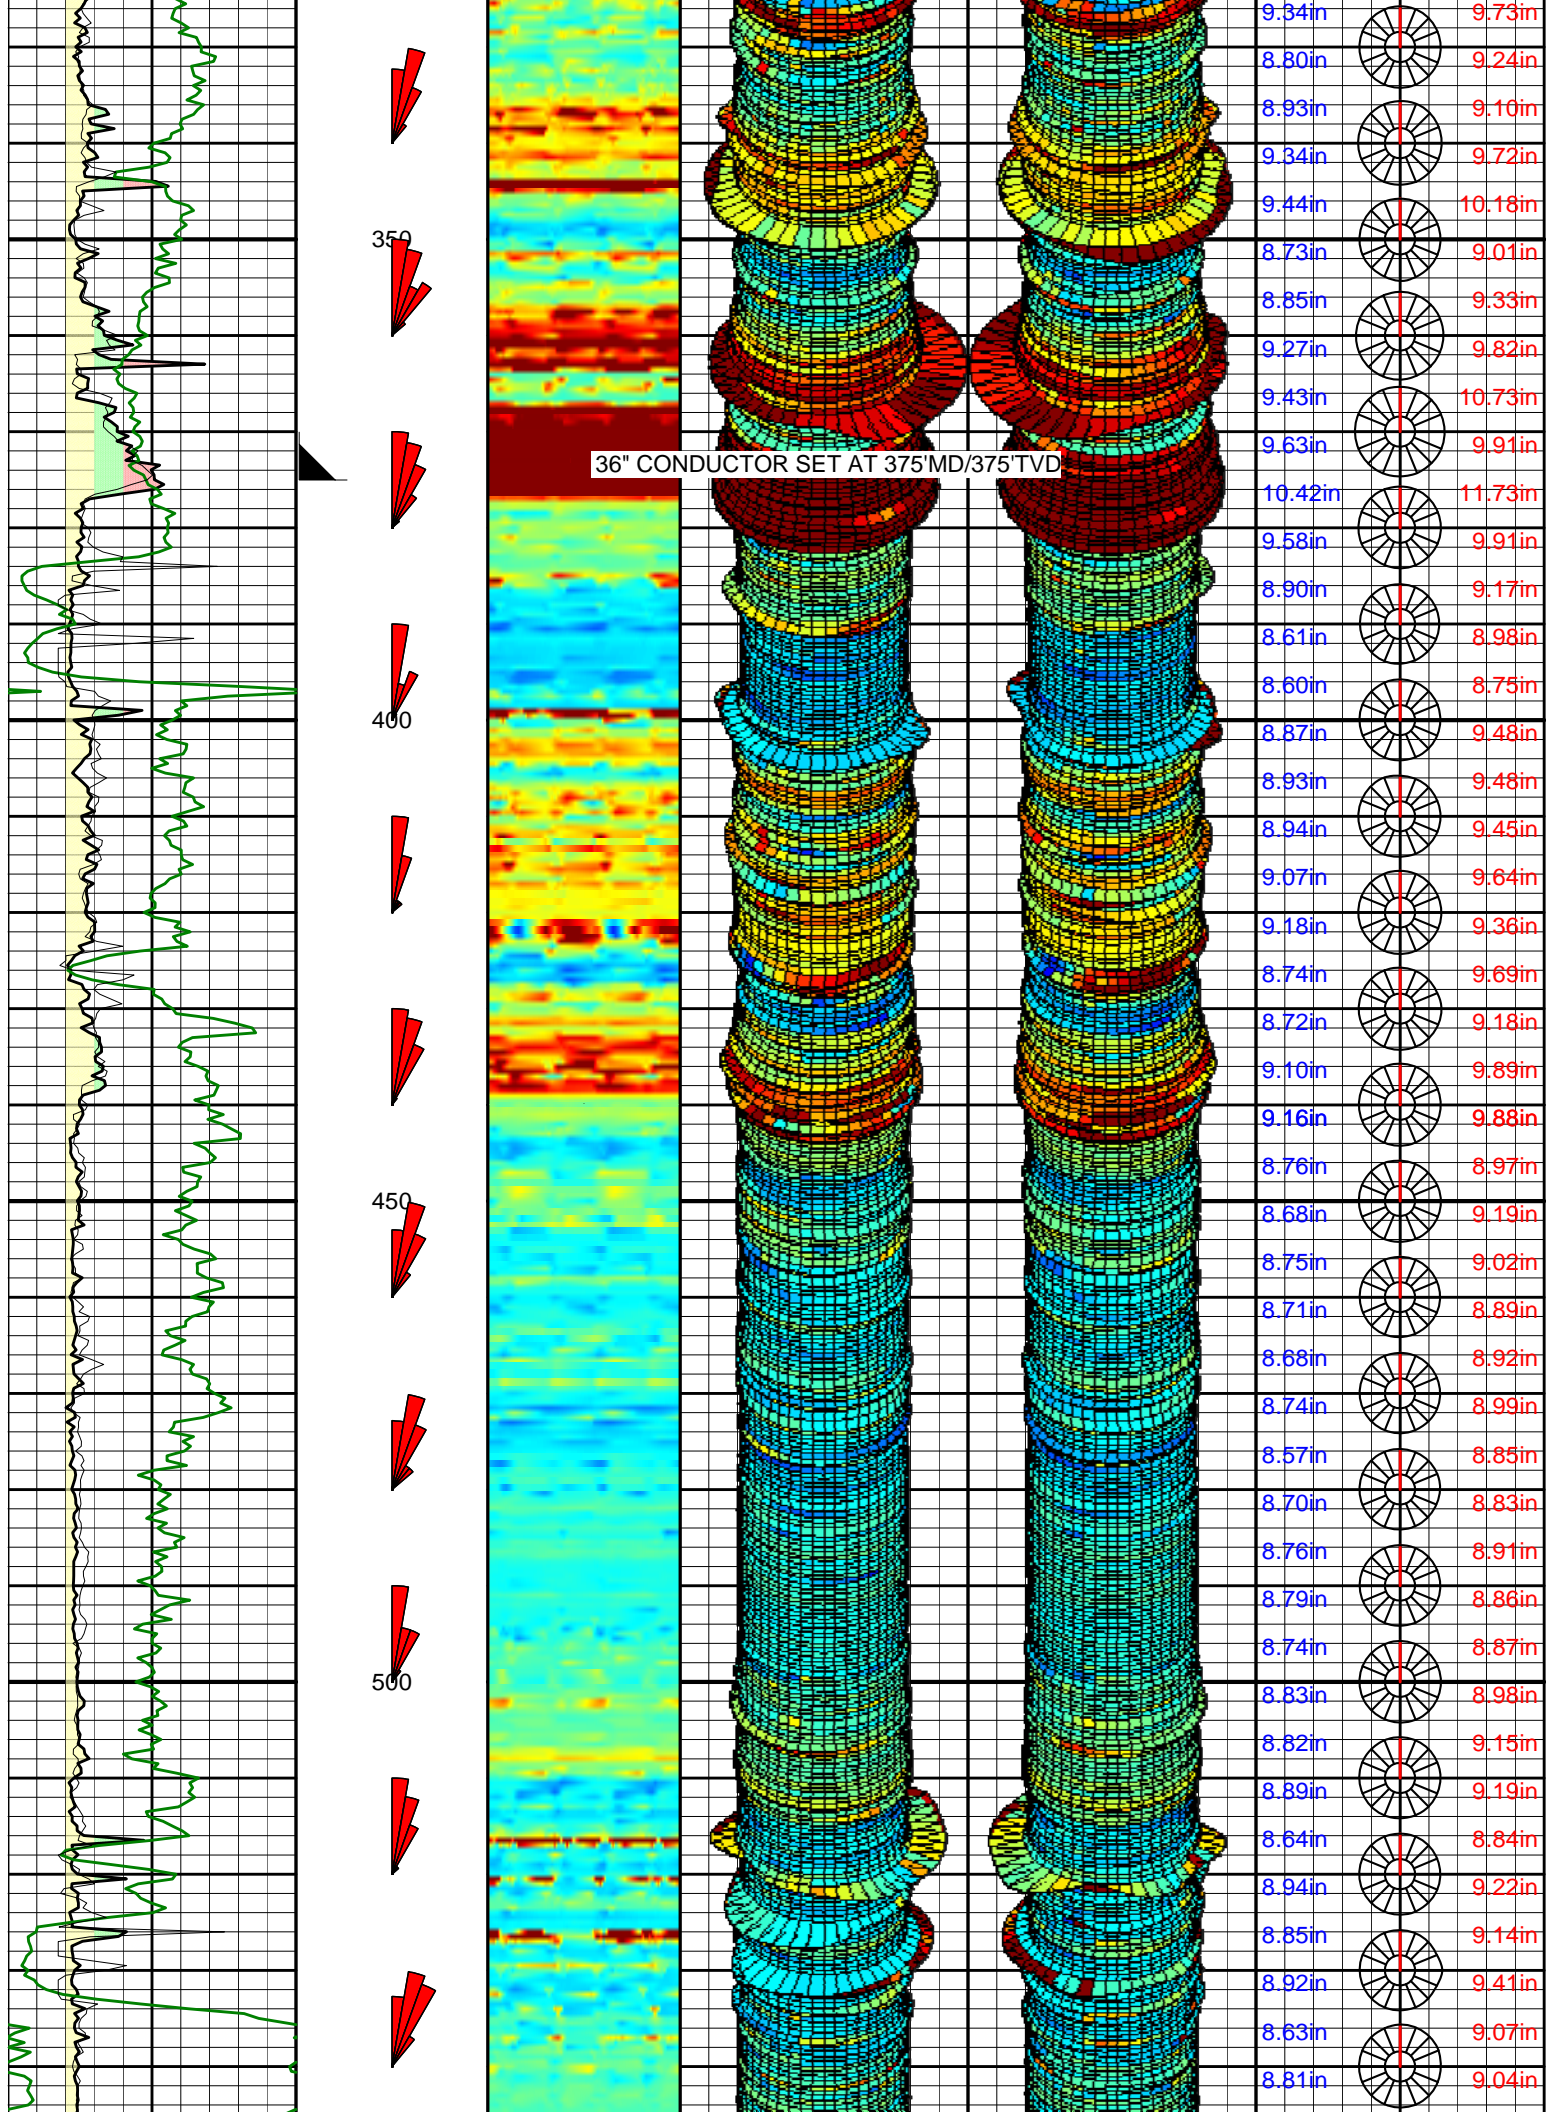



36" CONDUCTOR SET AT 375'MD/375'TVD


- 9.73in
- 9.24in
- 9.10in
- 9.72in
- 10.18in
- 9.01in
- 9.33in
- 9.82in
- 10.73in
- 9.91in
- 11.73in
- 9.91in
- 9.17in
- 8.98in
- 8.75in
- 9.48in
- 9.48in
- 9.45in
- 9.64in
- 9.36in
- 9.69in
- 9.18in
- 9.89in
- 9.88in
- 8.97in
- 9.19in
- 9.02in
- 8.89in
- 8.92in
- 8.99in
- 8.85in
- 8.83in
- 8.91in
- 8.86in
- 8.87in
- 8.98in
- 9.15in
- 9.19in
- 8.84in
- 9.22in
- 9.14in
- 9.41in
- 9.07in
- 9.04in

- 350
- 400
- 450
- 500

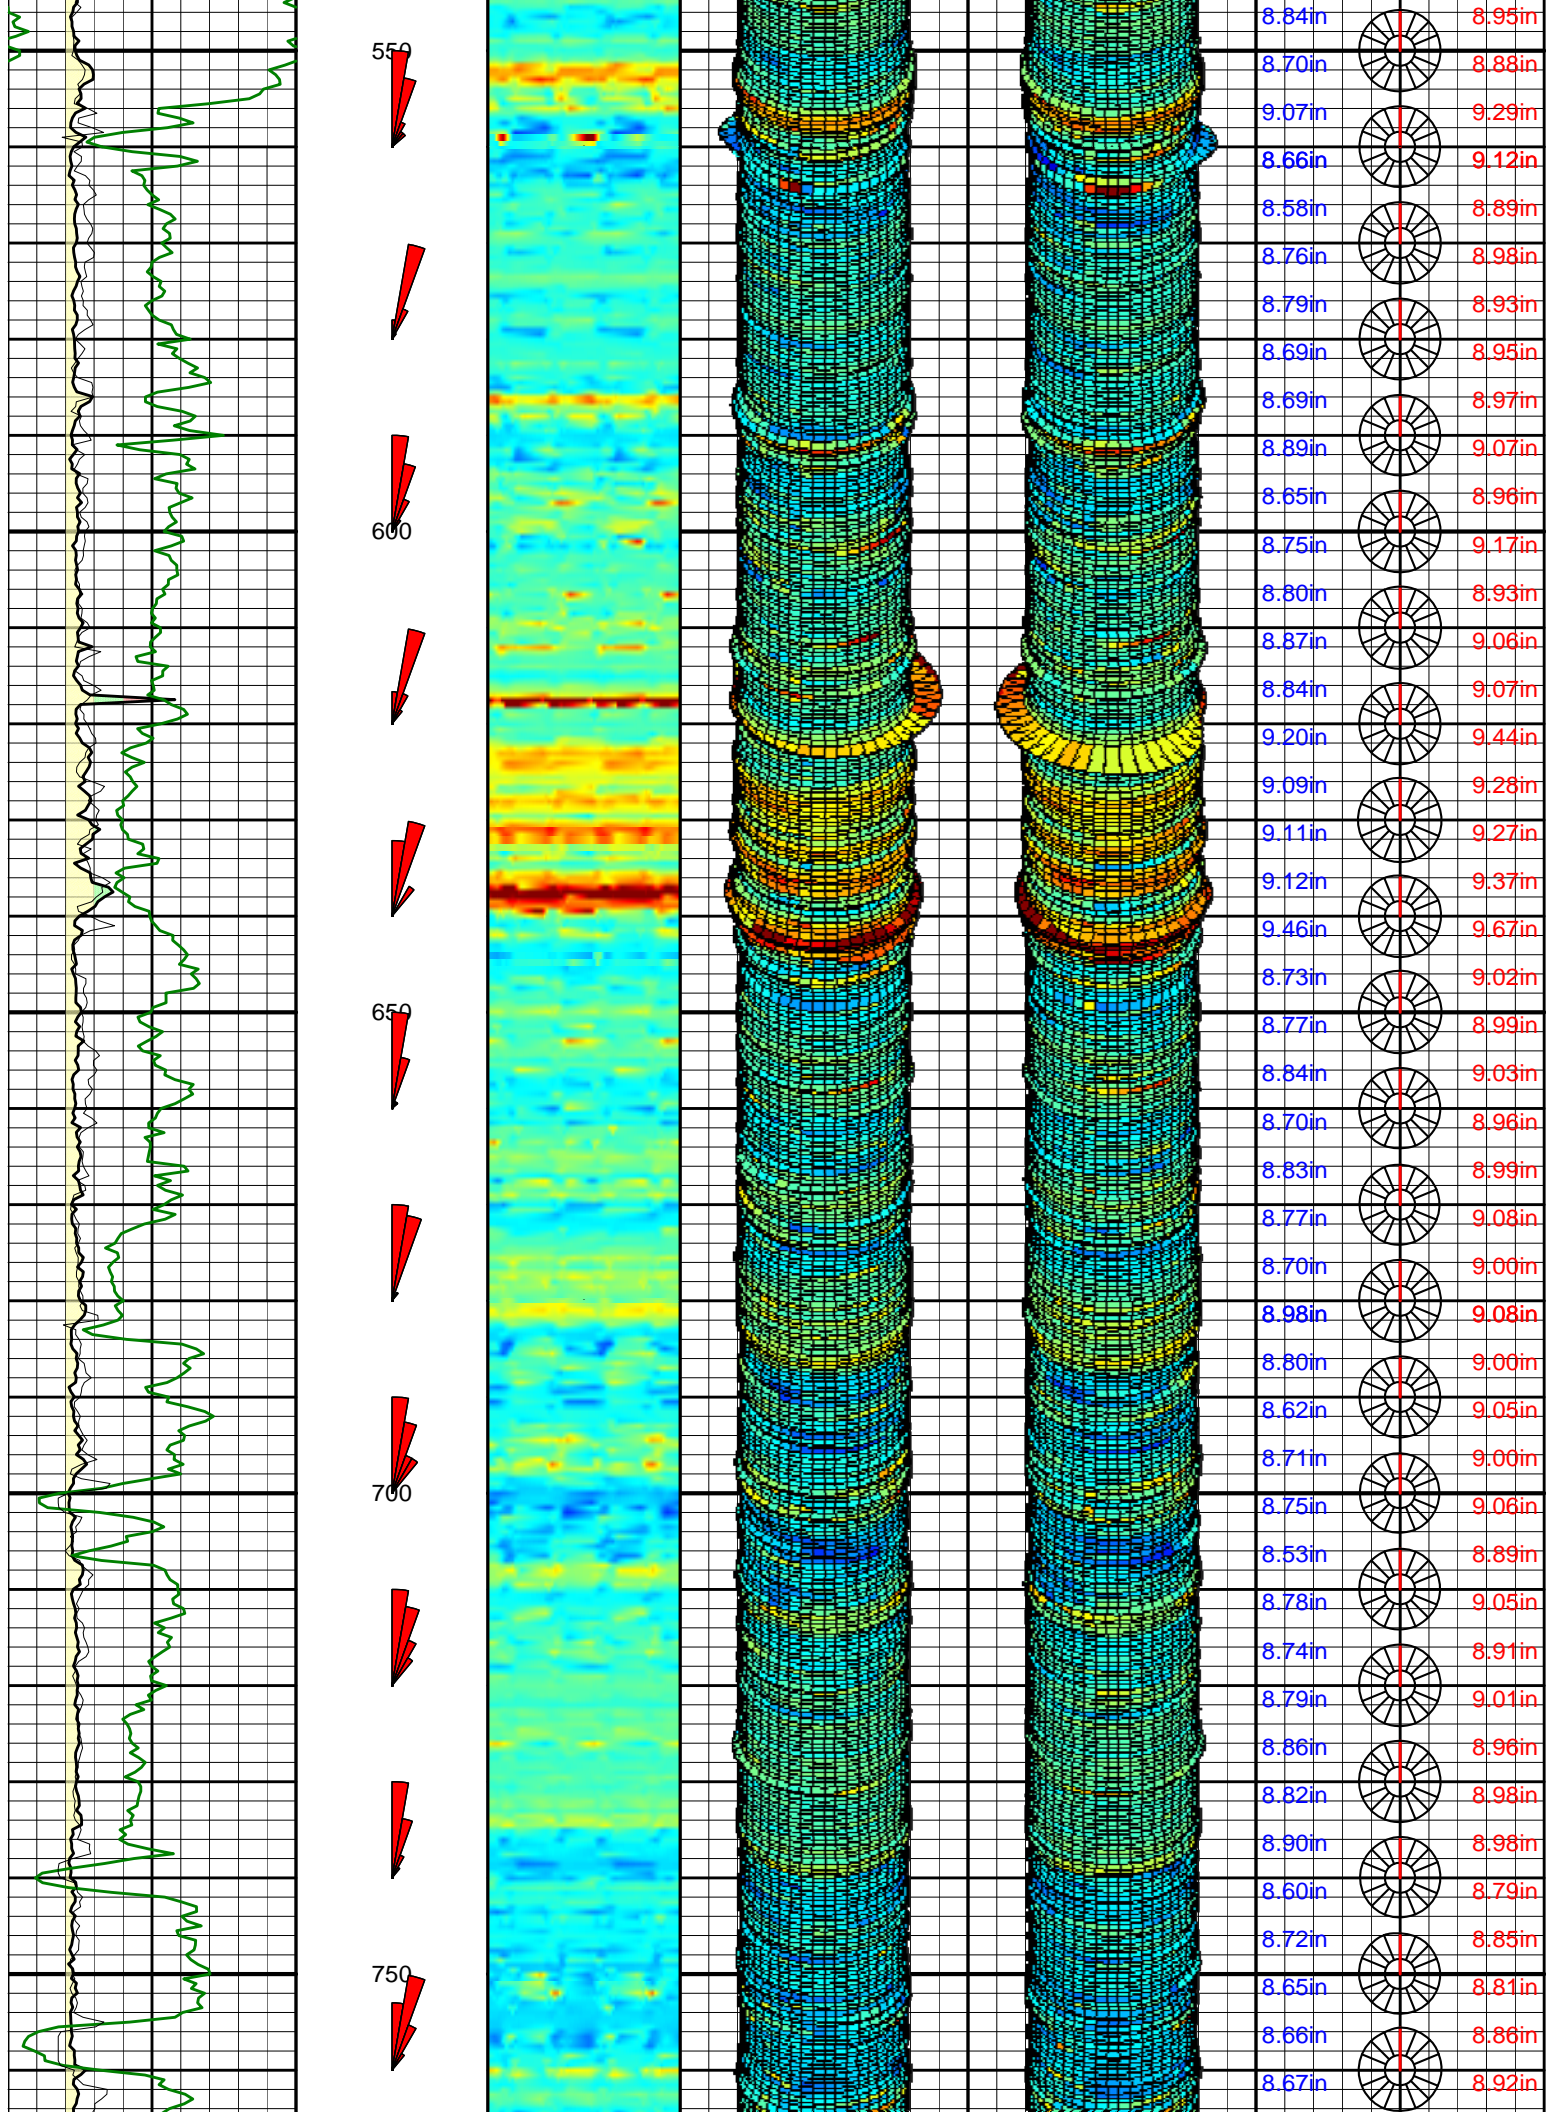


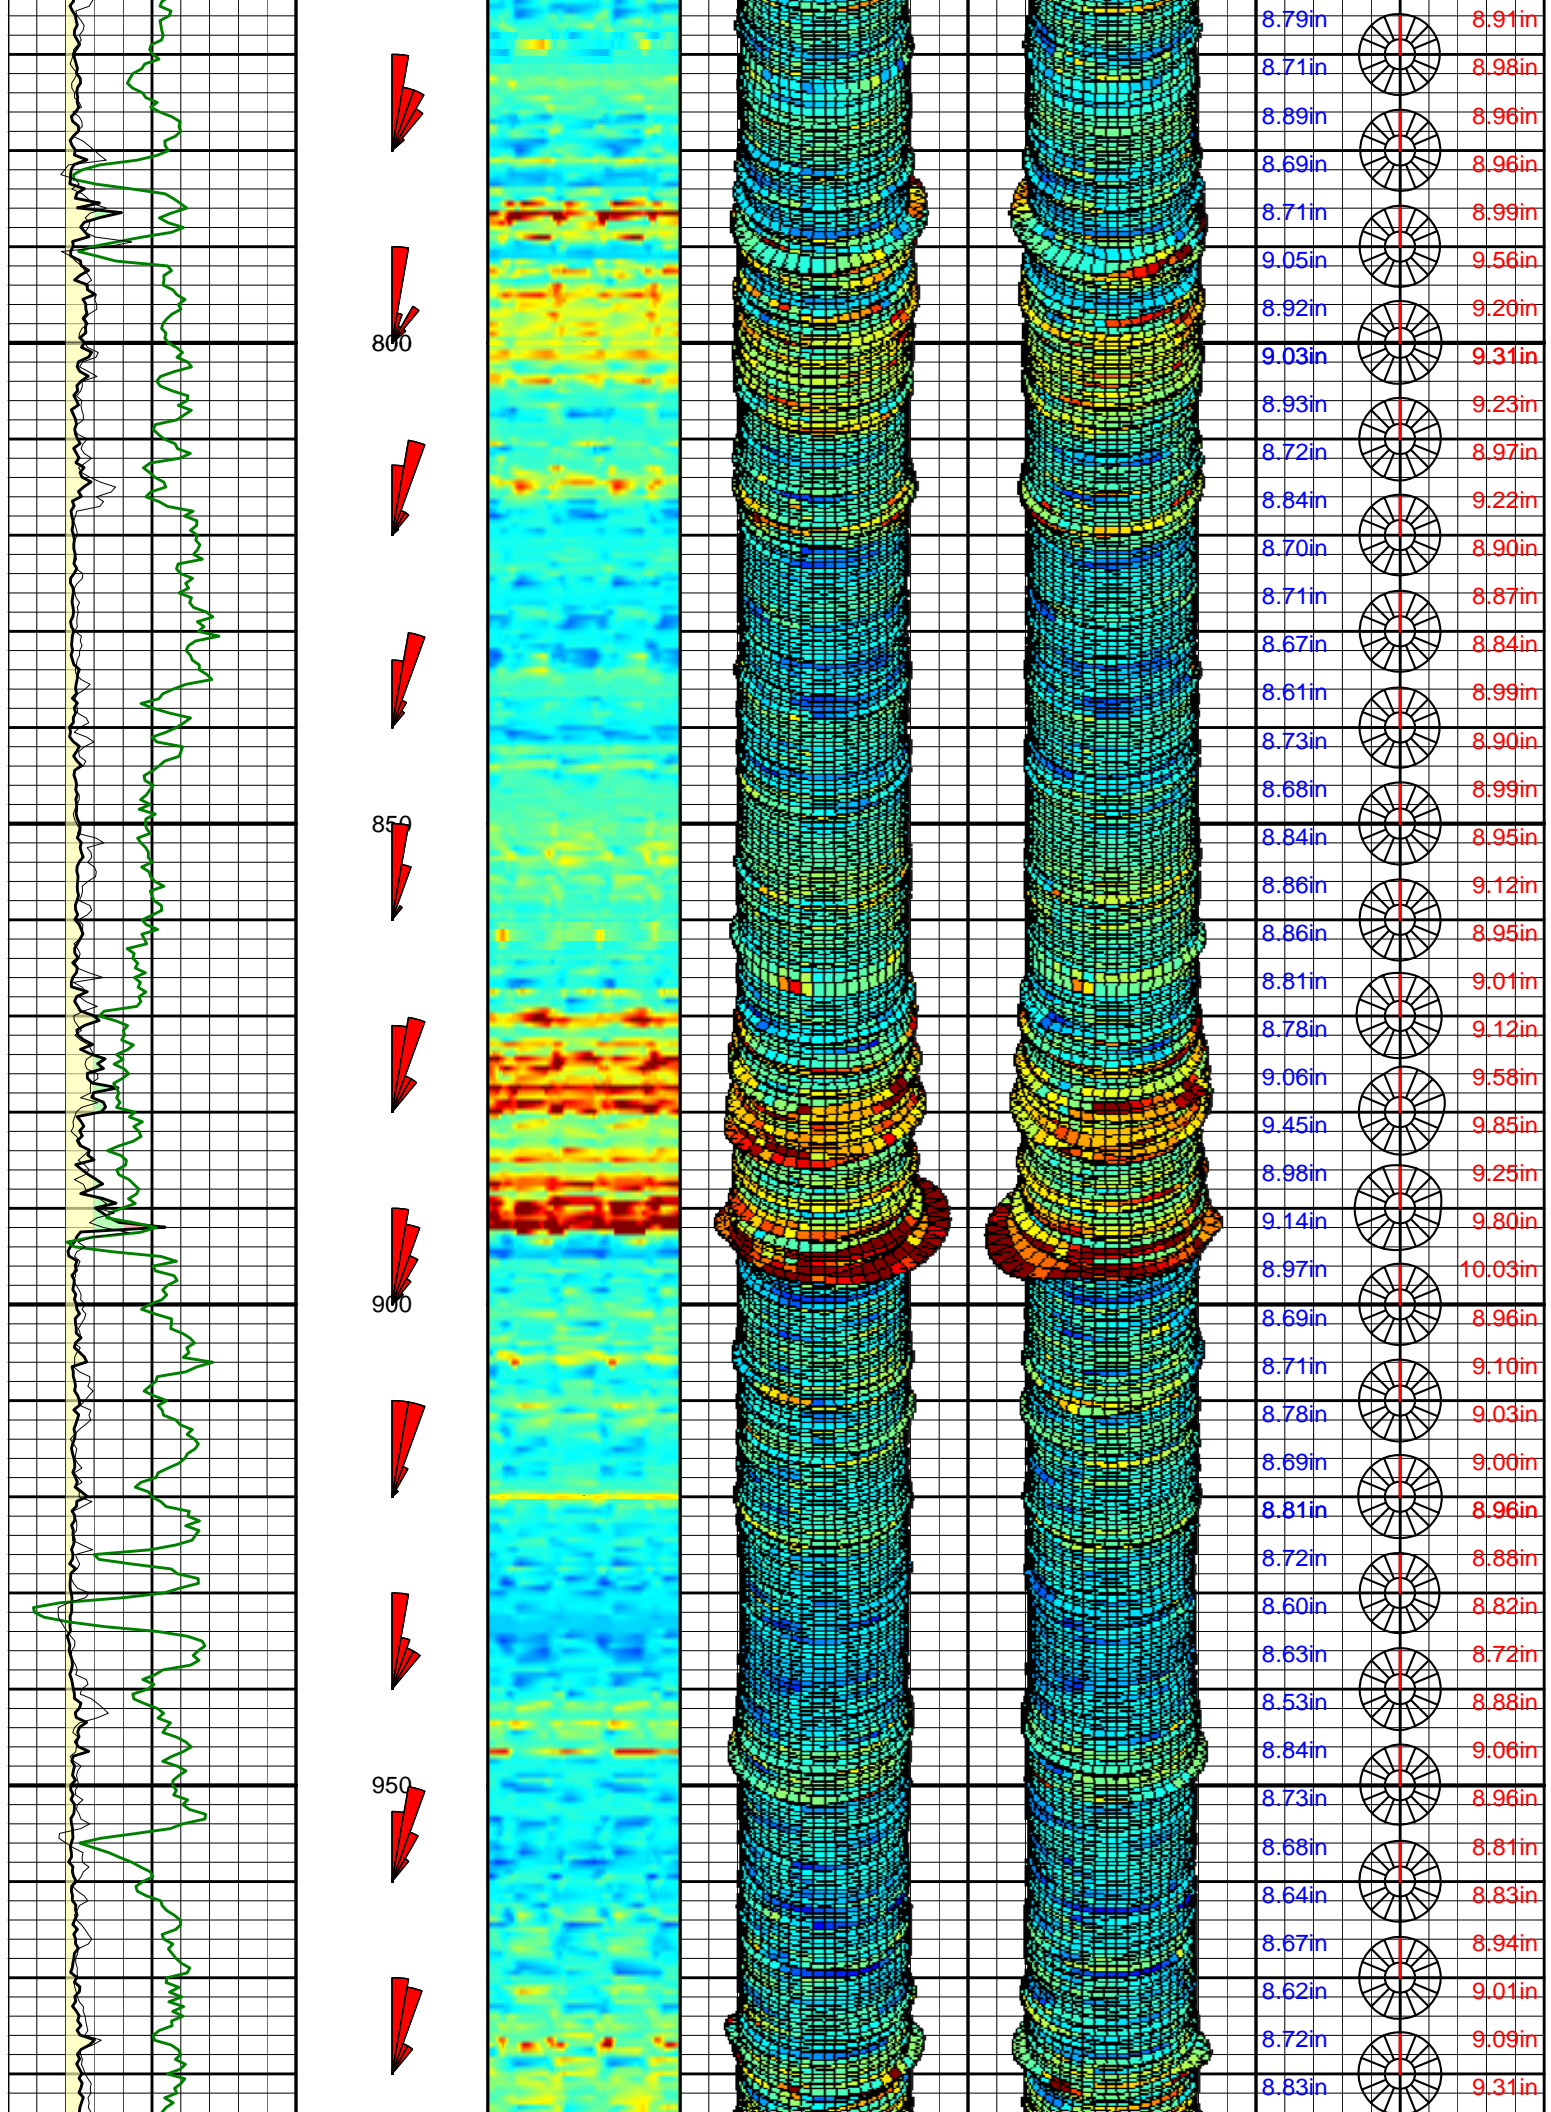

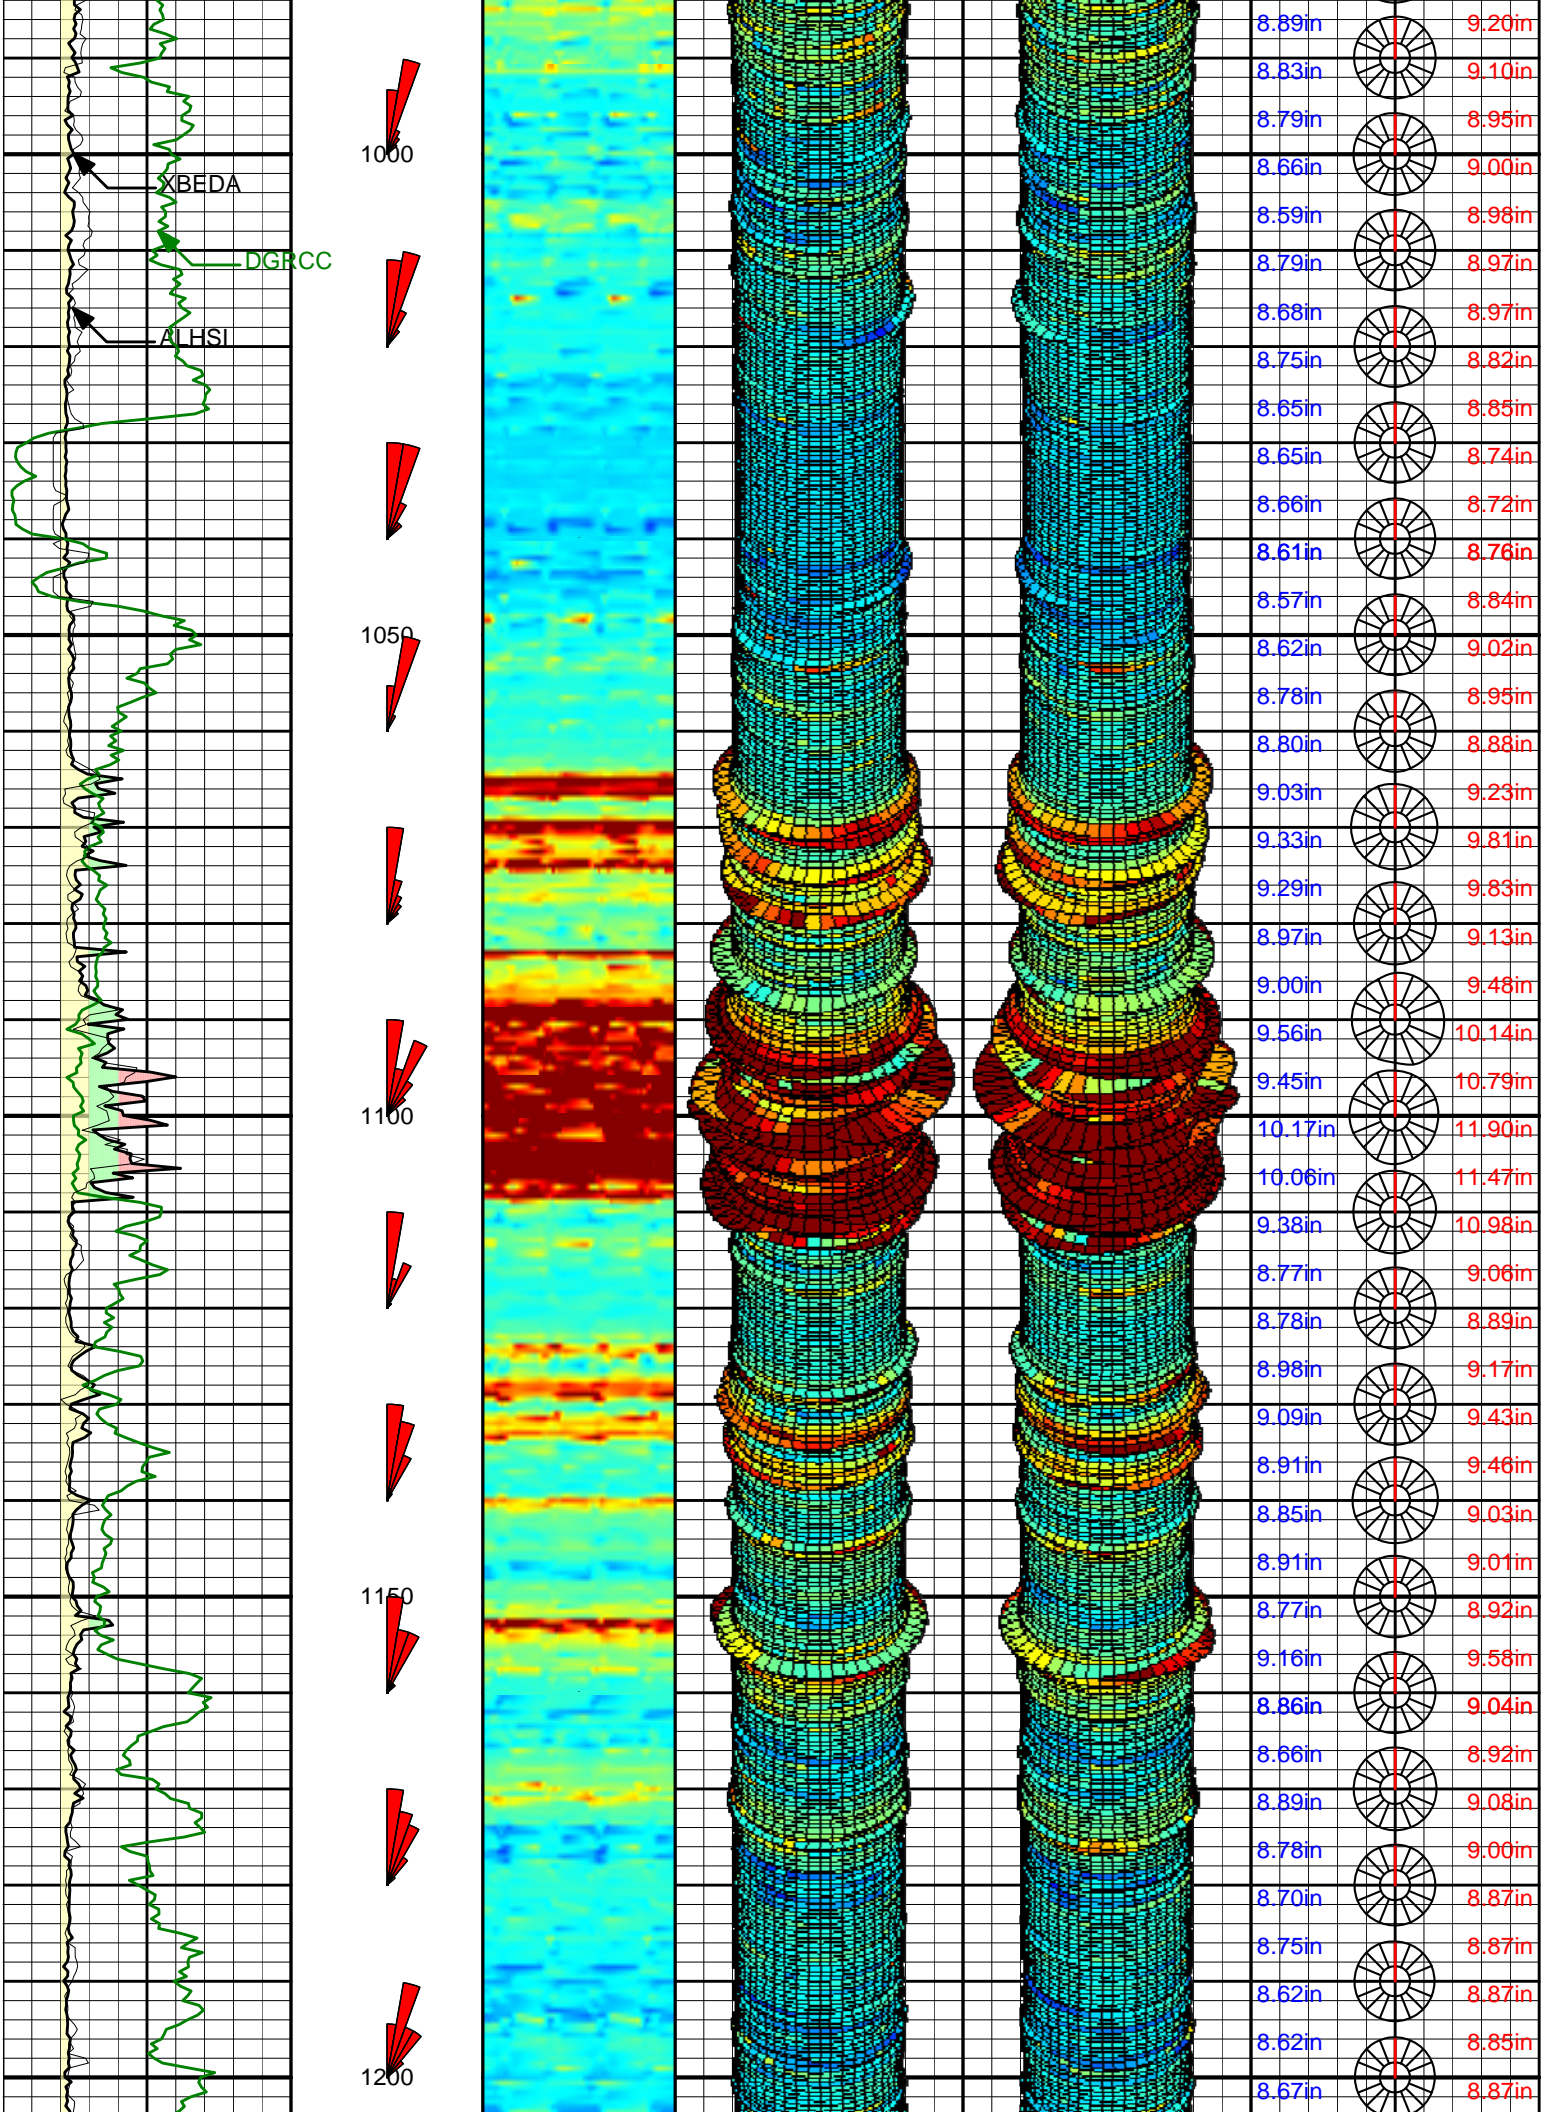

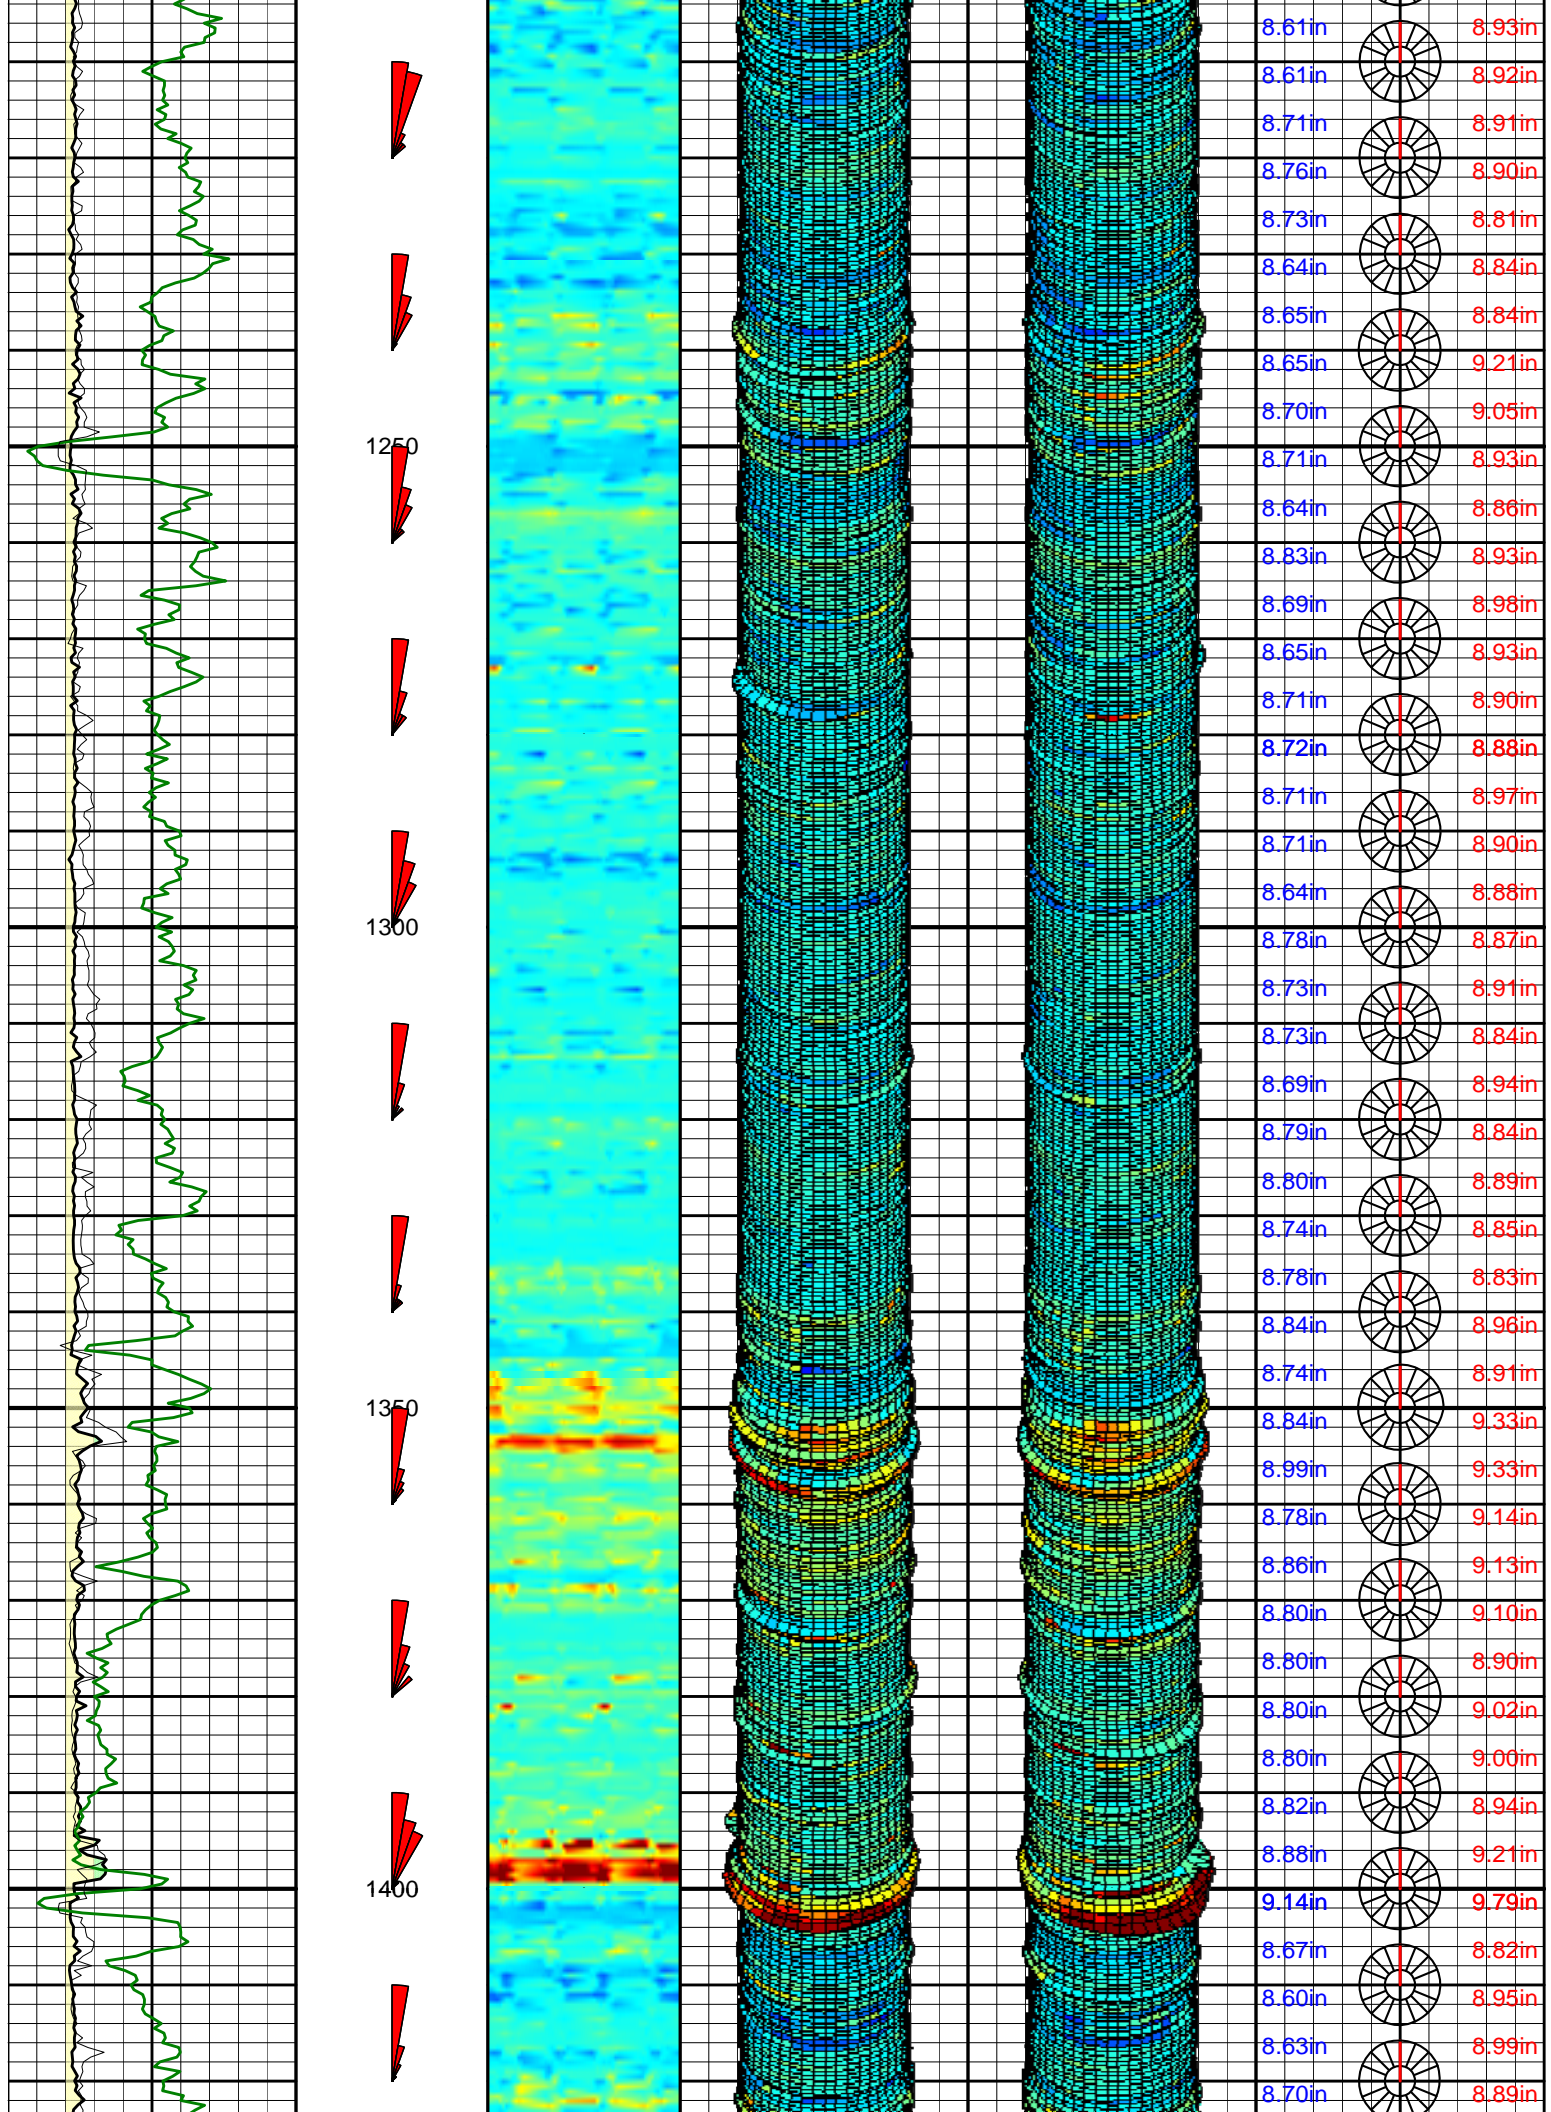

8.61in	8.93in
8.61in	8.92in
8.71in	8.91in
8.76in	8.90in
8.73in	8.81in
8.64in	8.84in
8.65in	8.84in
8.65in	9.21in
8.70in	9.05in
8.71in	8.93in
8.64in	8.86in
8.83in	8.93in
8.69in	8.98in
8.65in	8.93in
8.71in	8.90in
8.72in	8.88in
8.71in	8.97in
8.71in	8.90in
8.64in	8.88in
8.78in	8.87in
8.73in	8.91in
8.73in	8.84in
8.69in	8.94in
8.79in	8.84in
8.80in	8.89in
8.74in	8.85in
8.78in	8.83in
8.84in	8.96in
8.74in	8.91in
8.84in	9.33in
8.99in	9.33in
8.78in	9.14in
8.86in	9.13in
8.80in	9.10in
8.80in	8.90in
8.80in	9.02in
8.80in	9.00in
8.82in	8.94in
8.88in	9.21in
9.14in	9.79in
8.67in	8.82in
8.60in	8.95in
8.63in	8.99in
8.70in	8.89in

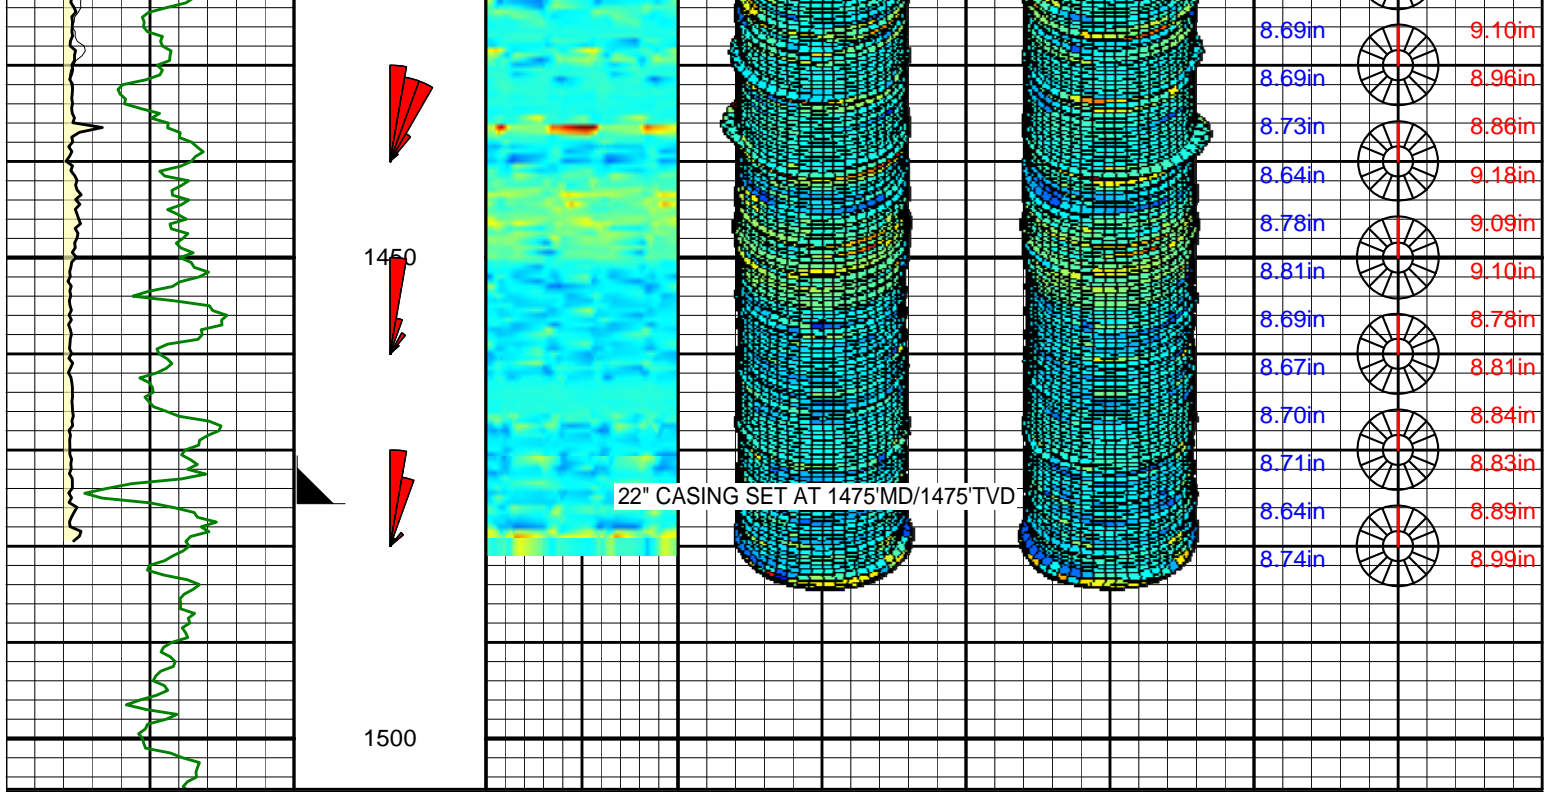


Hole Enlargement Under Minor <1" Medium 1"-2" Severe >2"		TVD ft 1 : 240	XCAL Image 4 Inches 5	XCAL 3D Plot Trace South 4 5	XCAL 3D Plot Trace North 4 5	XCAL Max Ellipse Diameter XCAL Min Ellipse Diameter
ALD Hole Size Indicator inches 6.5 16.5			XCAL Ellipse Direction 			
DGR Comb Gamma Ray BCorr api 0 150						
XCAL Ellipse Avg Diameter inches 6.5 16.5						

LWD R600 - 12.25" HOLE SECTION

XCAL Ellipse Avg Diameter inches 10.25 20.25		TVD ft 1 : 240	XCAL Image 5.5 Inches 6.5	XCAL 3D Plot Trace South 5.5 6.5	XCAL 3D Plot Trace North 5.5 6.5	XCAL Max Ellipse Diameter XCAL Min Ellipse Diameter
DGR Comb Gamma Ray BCorr api 0 150			XCAL Ellipse Direction 			
ALD Hole Size Indicator inches 10.25 20.25						
Hole Enlargement Under Minor <1" Medium 1"-2" Severe >2"						
XCAL Ellipse Avg Diameter inches 12.36in 12.42in 12.39in 12.43in						

SENSORS LOGGED IN CASING TO SHOE @ 2933'MD/2933'TVD

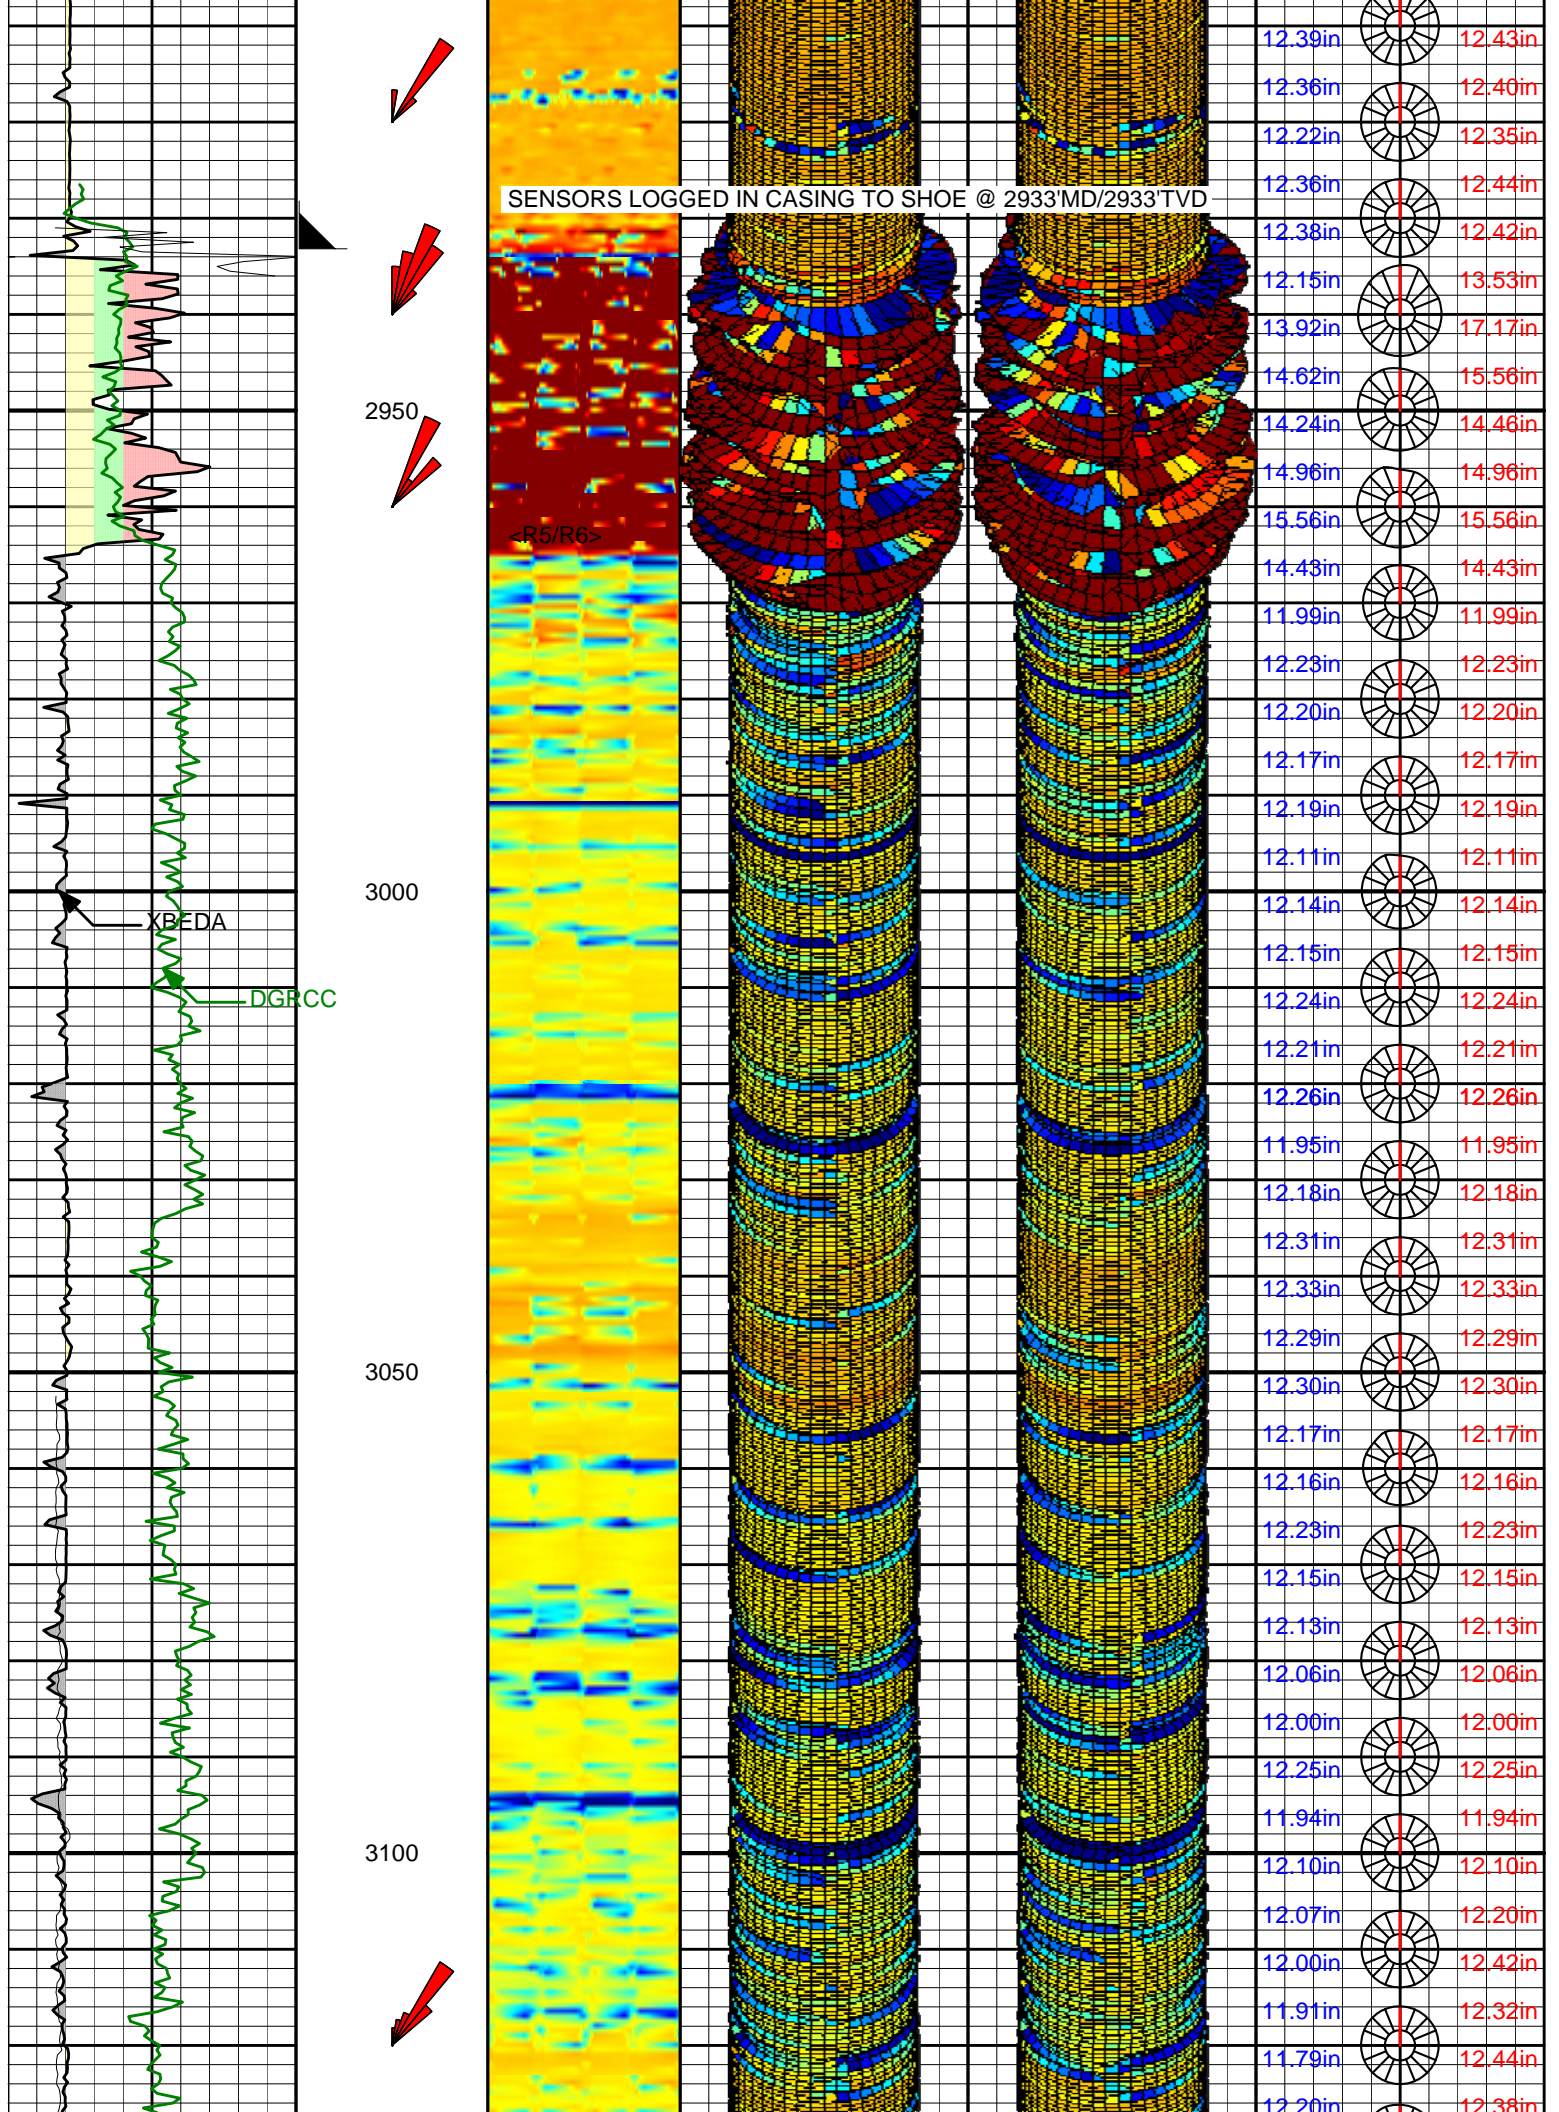

2950

3000

3050


3100


XBEDA


DGRCC


<R5/R6>


- 12.39in
- 12.36in
- 12.22in
- 12.36in
- 12.38in
- 12.15in
- 13.92in
- 14.62in
- 14.24in
- 14.96in
- 15.56in
- 14.43in
- 11.99in
- 12.23in
- 12.20in
- 12.17in
- 12.19in
- 12.11in
- 12.14in
- 12.15in
- 12.24in
- 12.21in
- 12.26in
- 11.95in
- 12.18in
- 12.31in
- 12.33in
- 12.29in
- 12.30in
- 12.17in
- 12.16in
- 12.23in
- 12.15in
- 12.13in
- 12.06in
- 12.00in
- 12.25in
- 11.94in
- 12.10in
- 12.07in
- 12.00in
- 11.91in
- 11.79in
- 12.20in
- 12.38in
- 12.43in
- 12.40in
- 12.35in
- 12.44in
- 12.42in
- 13.53in
- 17.17in
- 15.56in
- 14.46in
- 14.96in
- 15.56in
- 14.43in
- 11.99in
- 12.23in
- 12.20in
- 12.17in
- 12.19in
- 12.11in
- 12.14in
- 12.15in
- 12.24in
- 12.21in
- 12.26in
- 11.95in
- 12.18in
- 12.31in
- 12.33in
- 12.29in
- 12.30in
- 12.17in
- 12.16in
- 12.23in
- 12.15in
- 12.13in
- 12.06in
- 12.00in
- 12.25in
- 11.94in
- 12.10in
- 12.20in
- 12.42in
- 12.32in
- 12.44in
- 12.38in

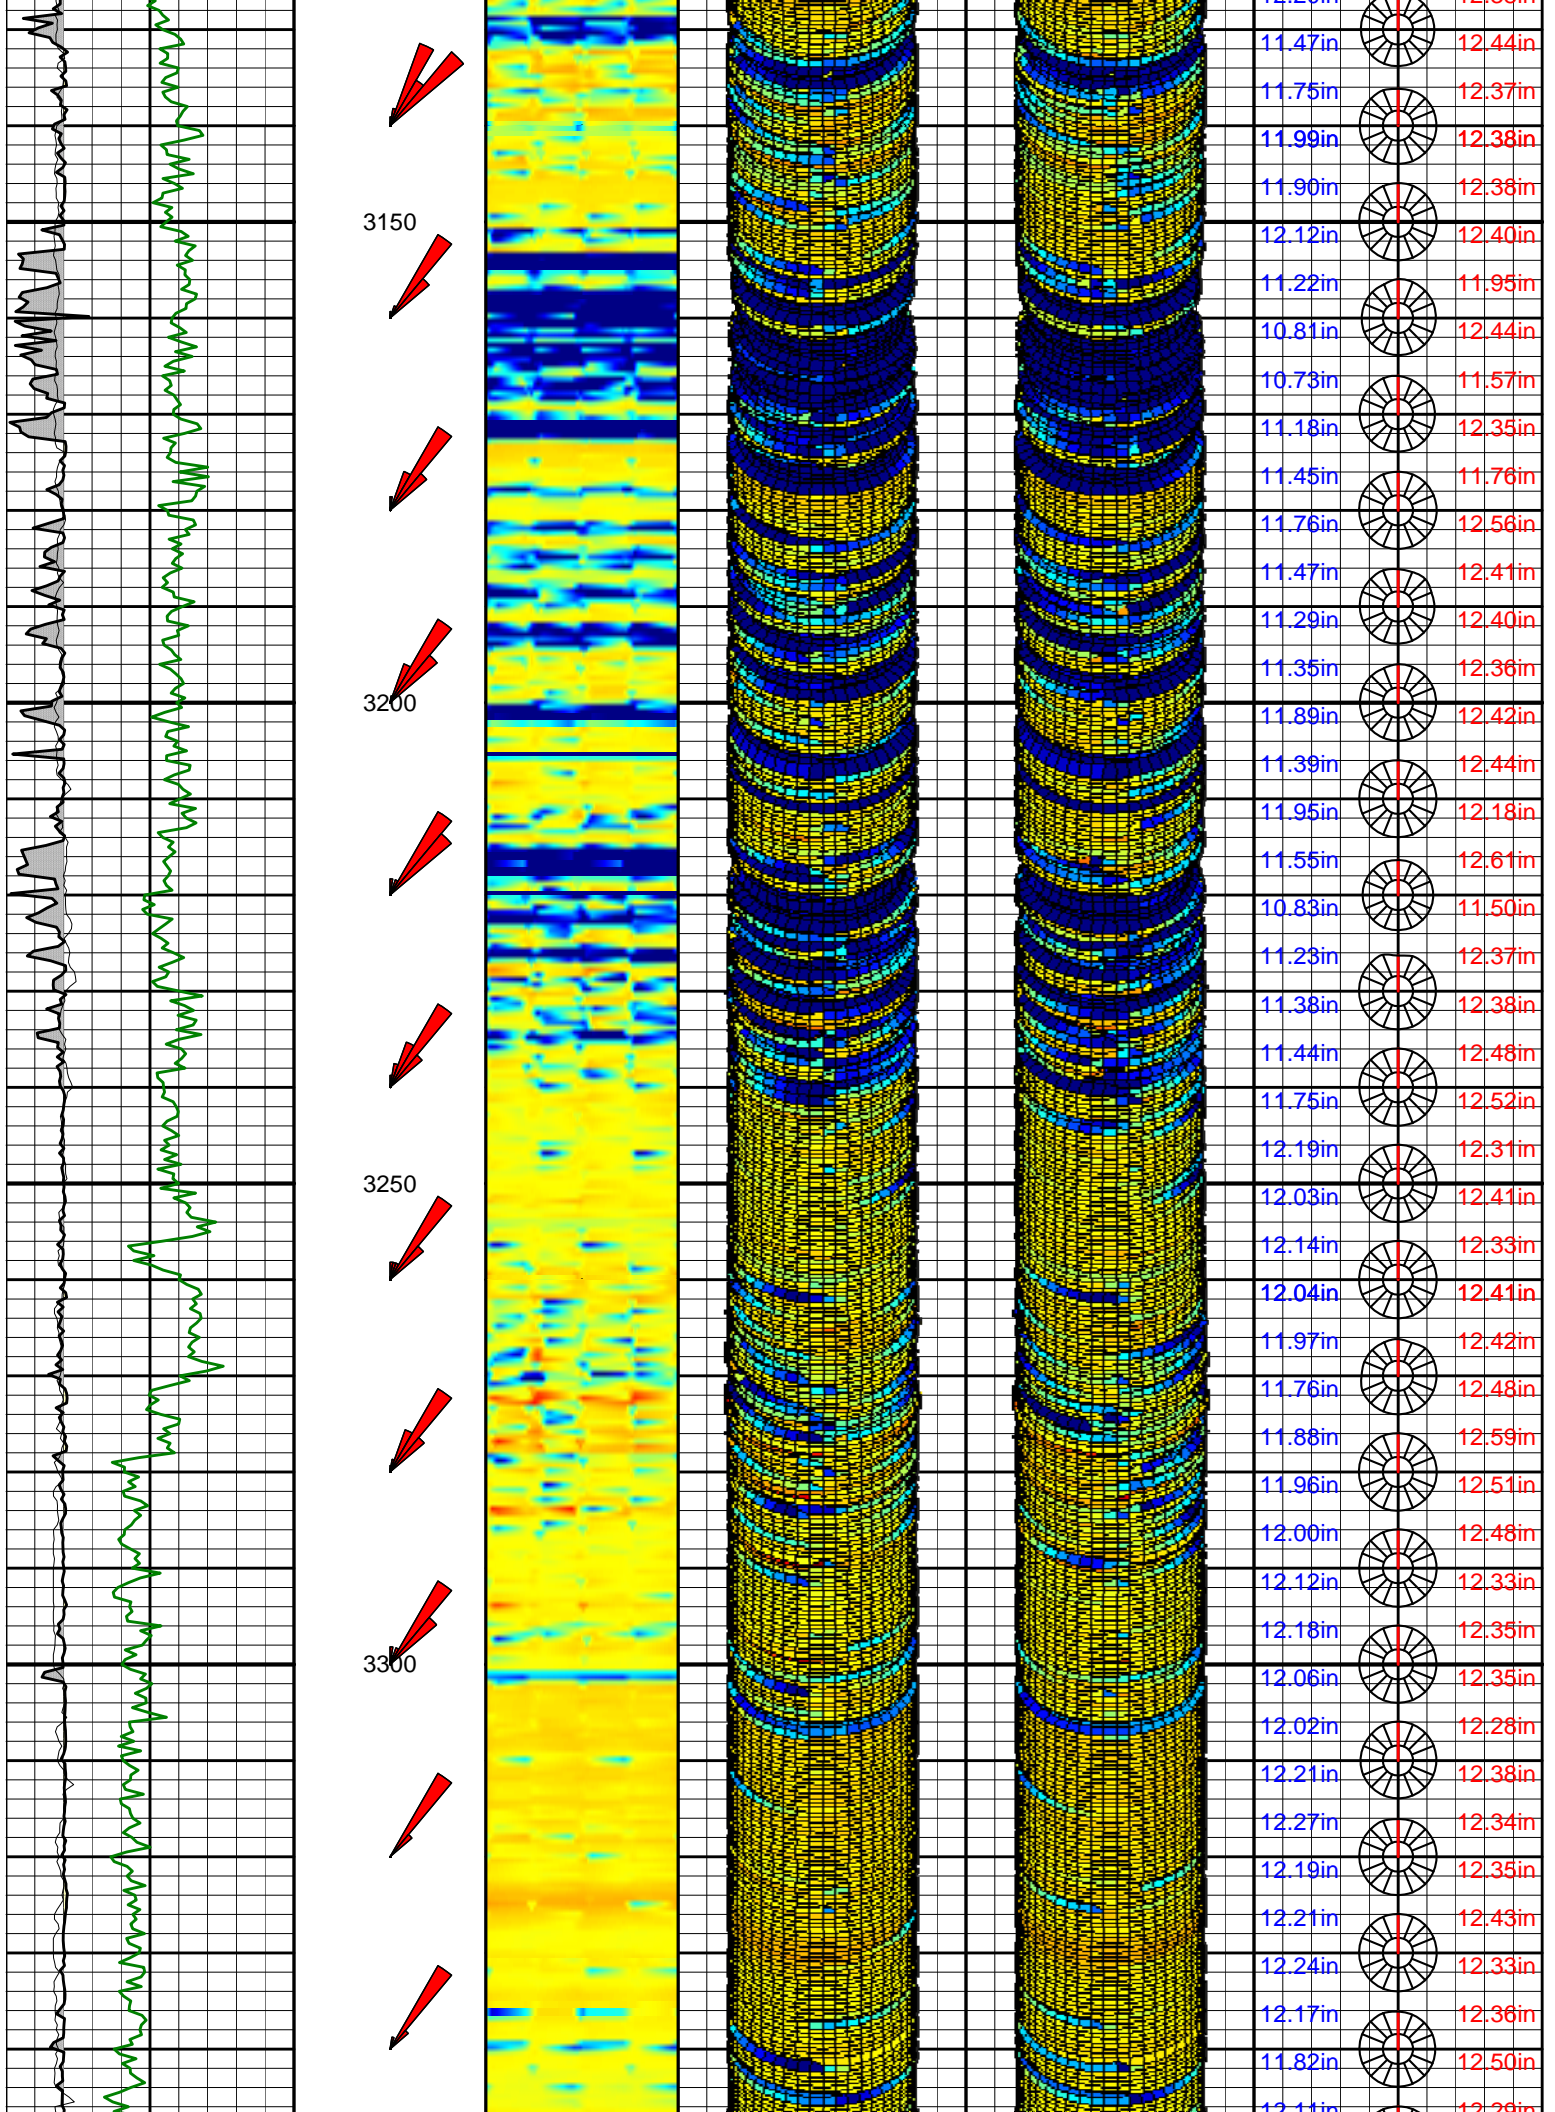


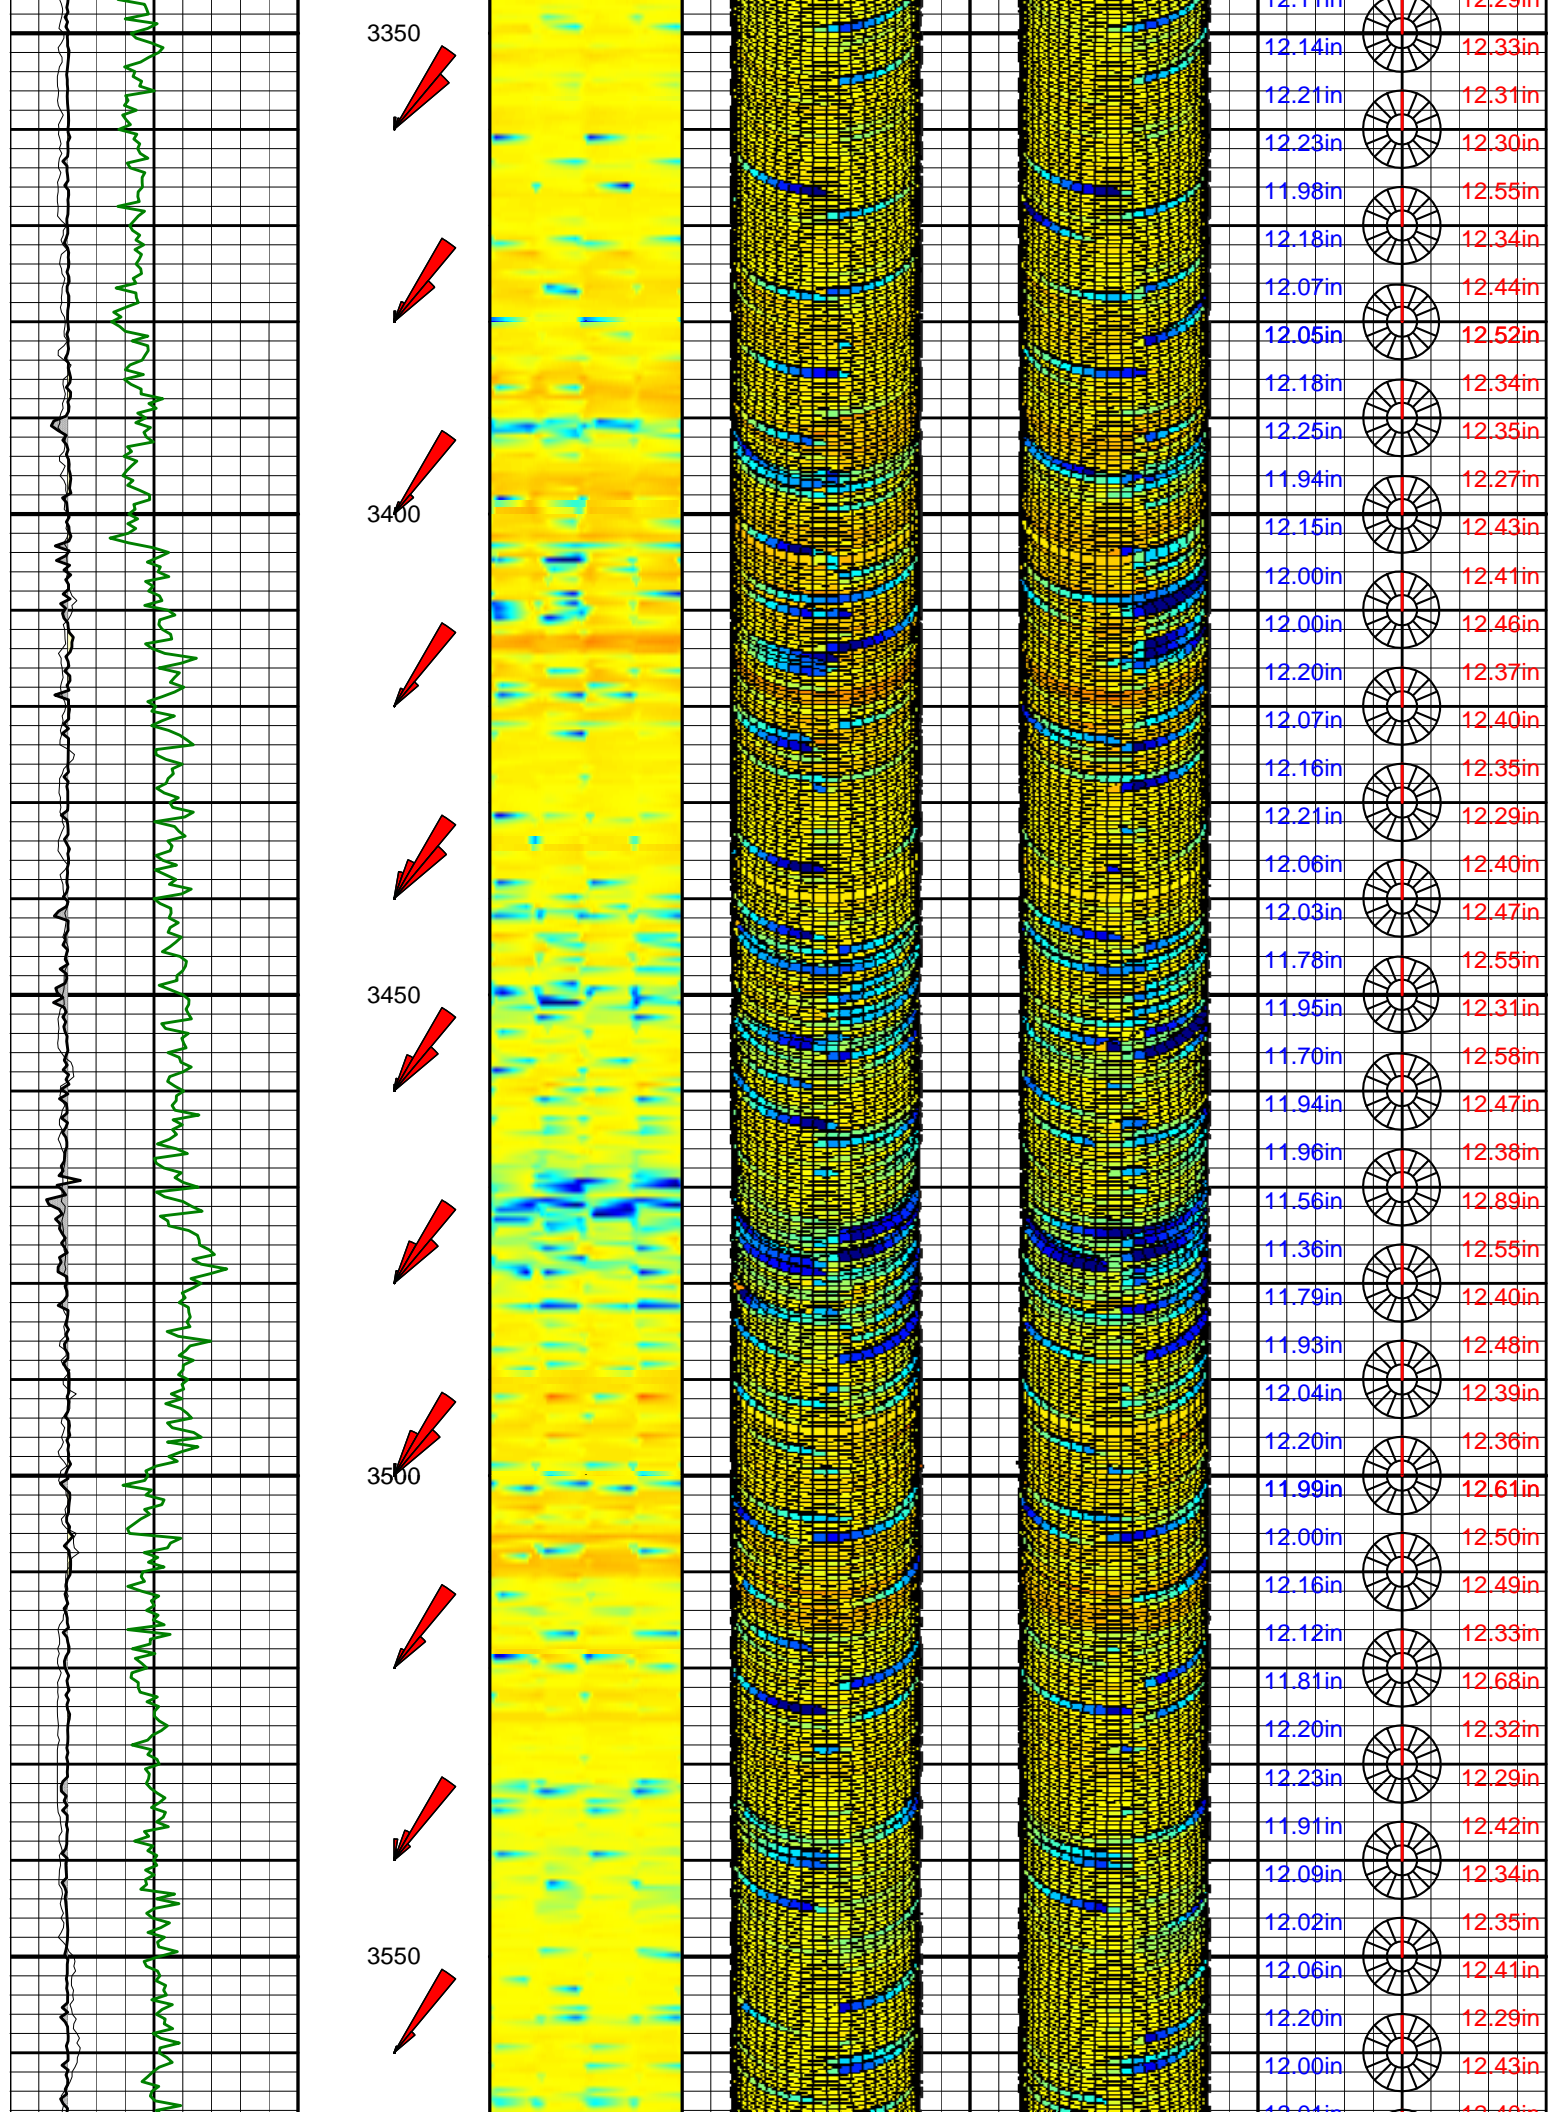


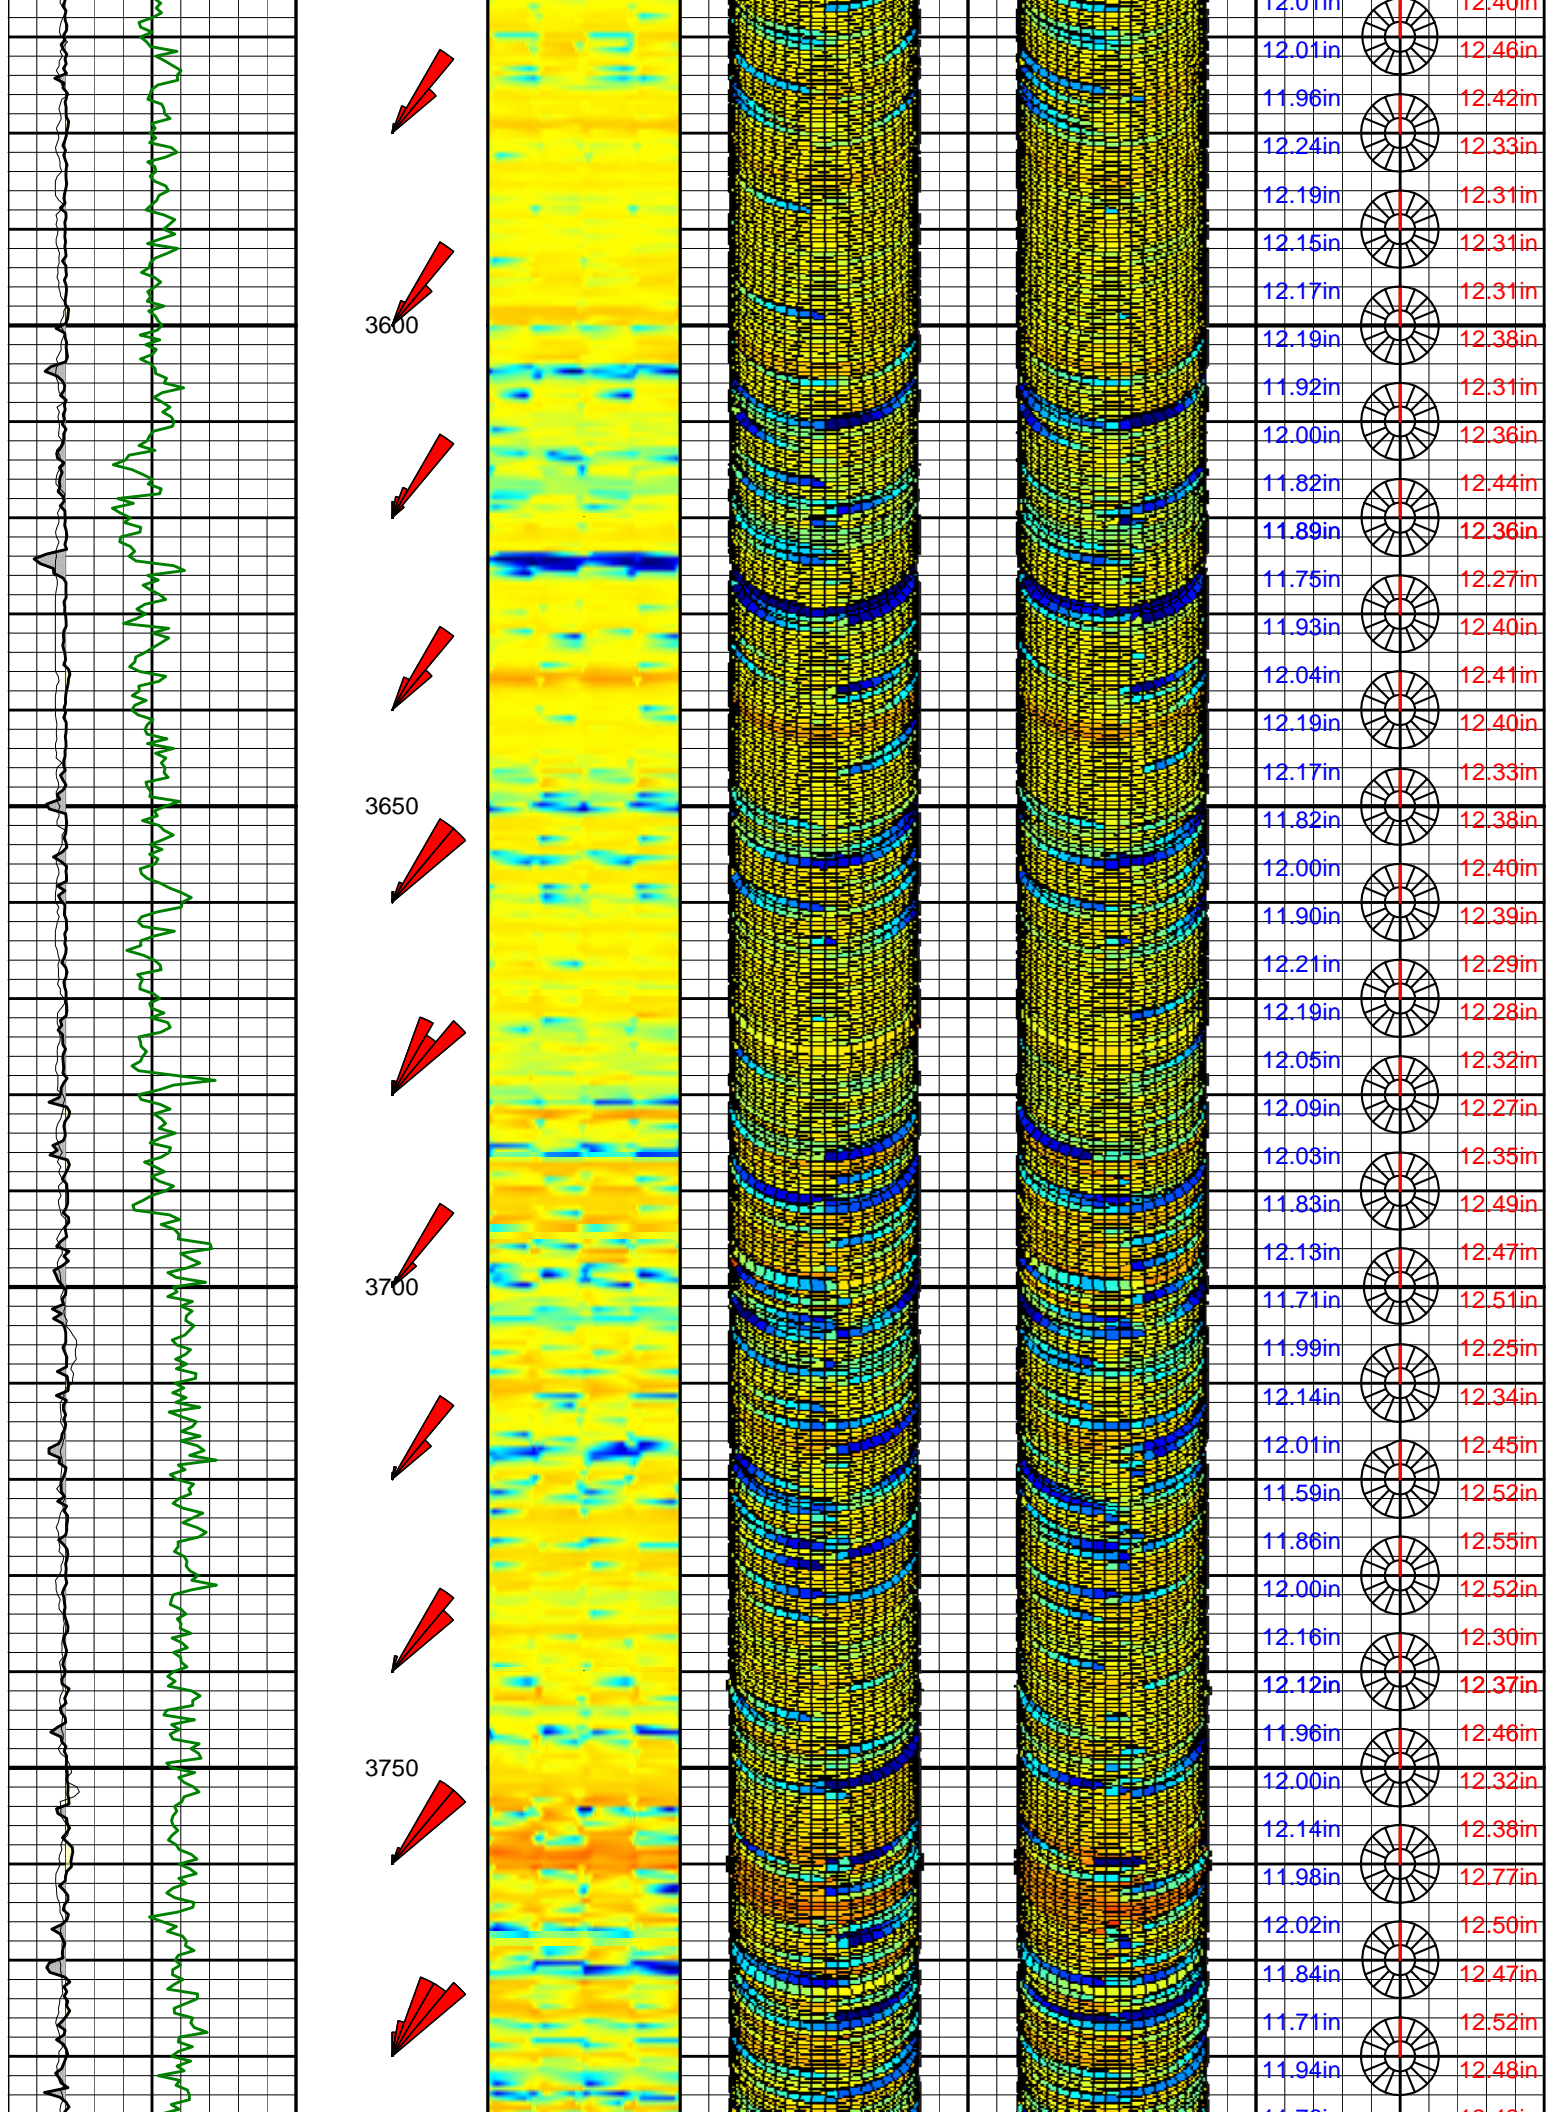


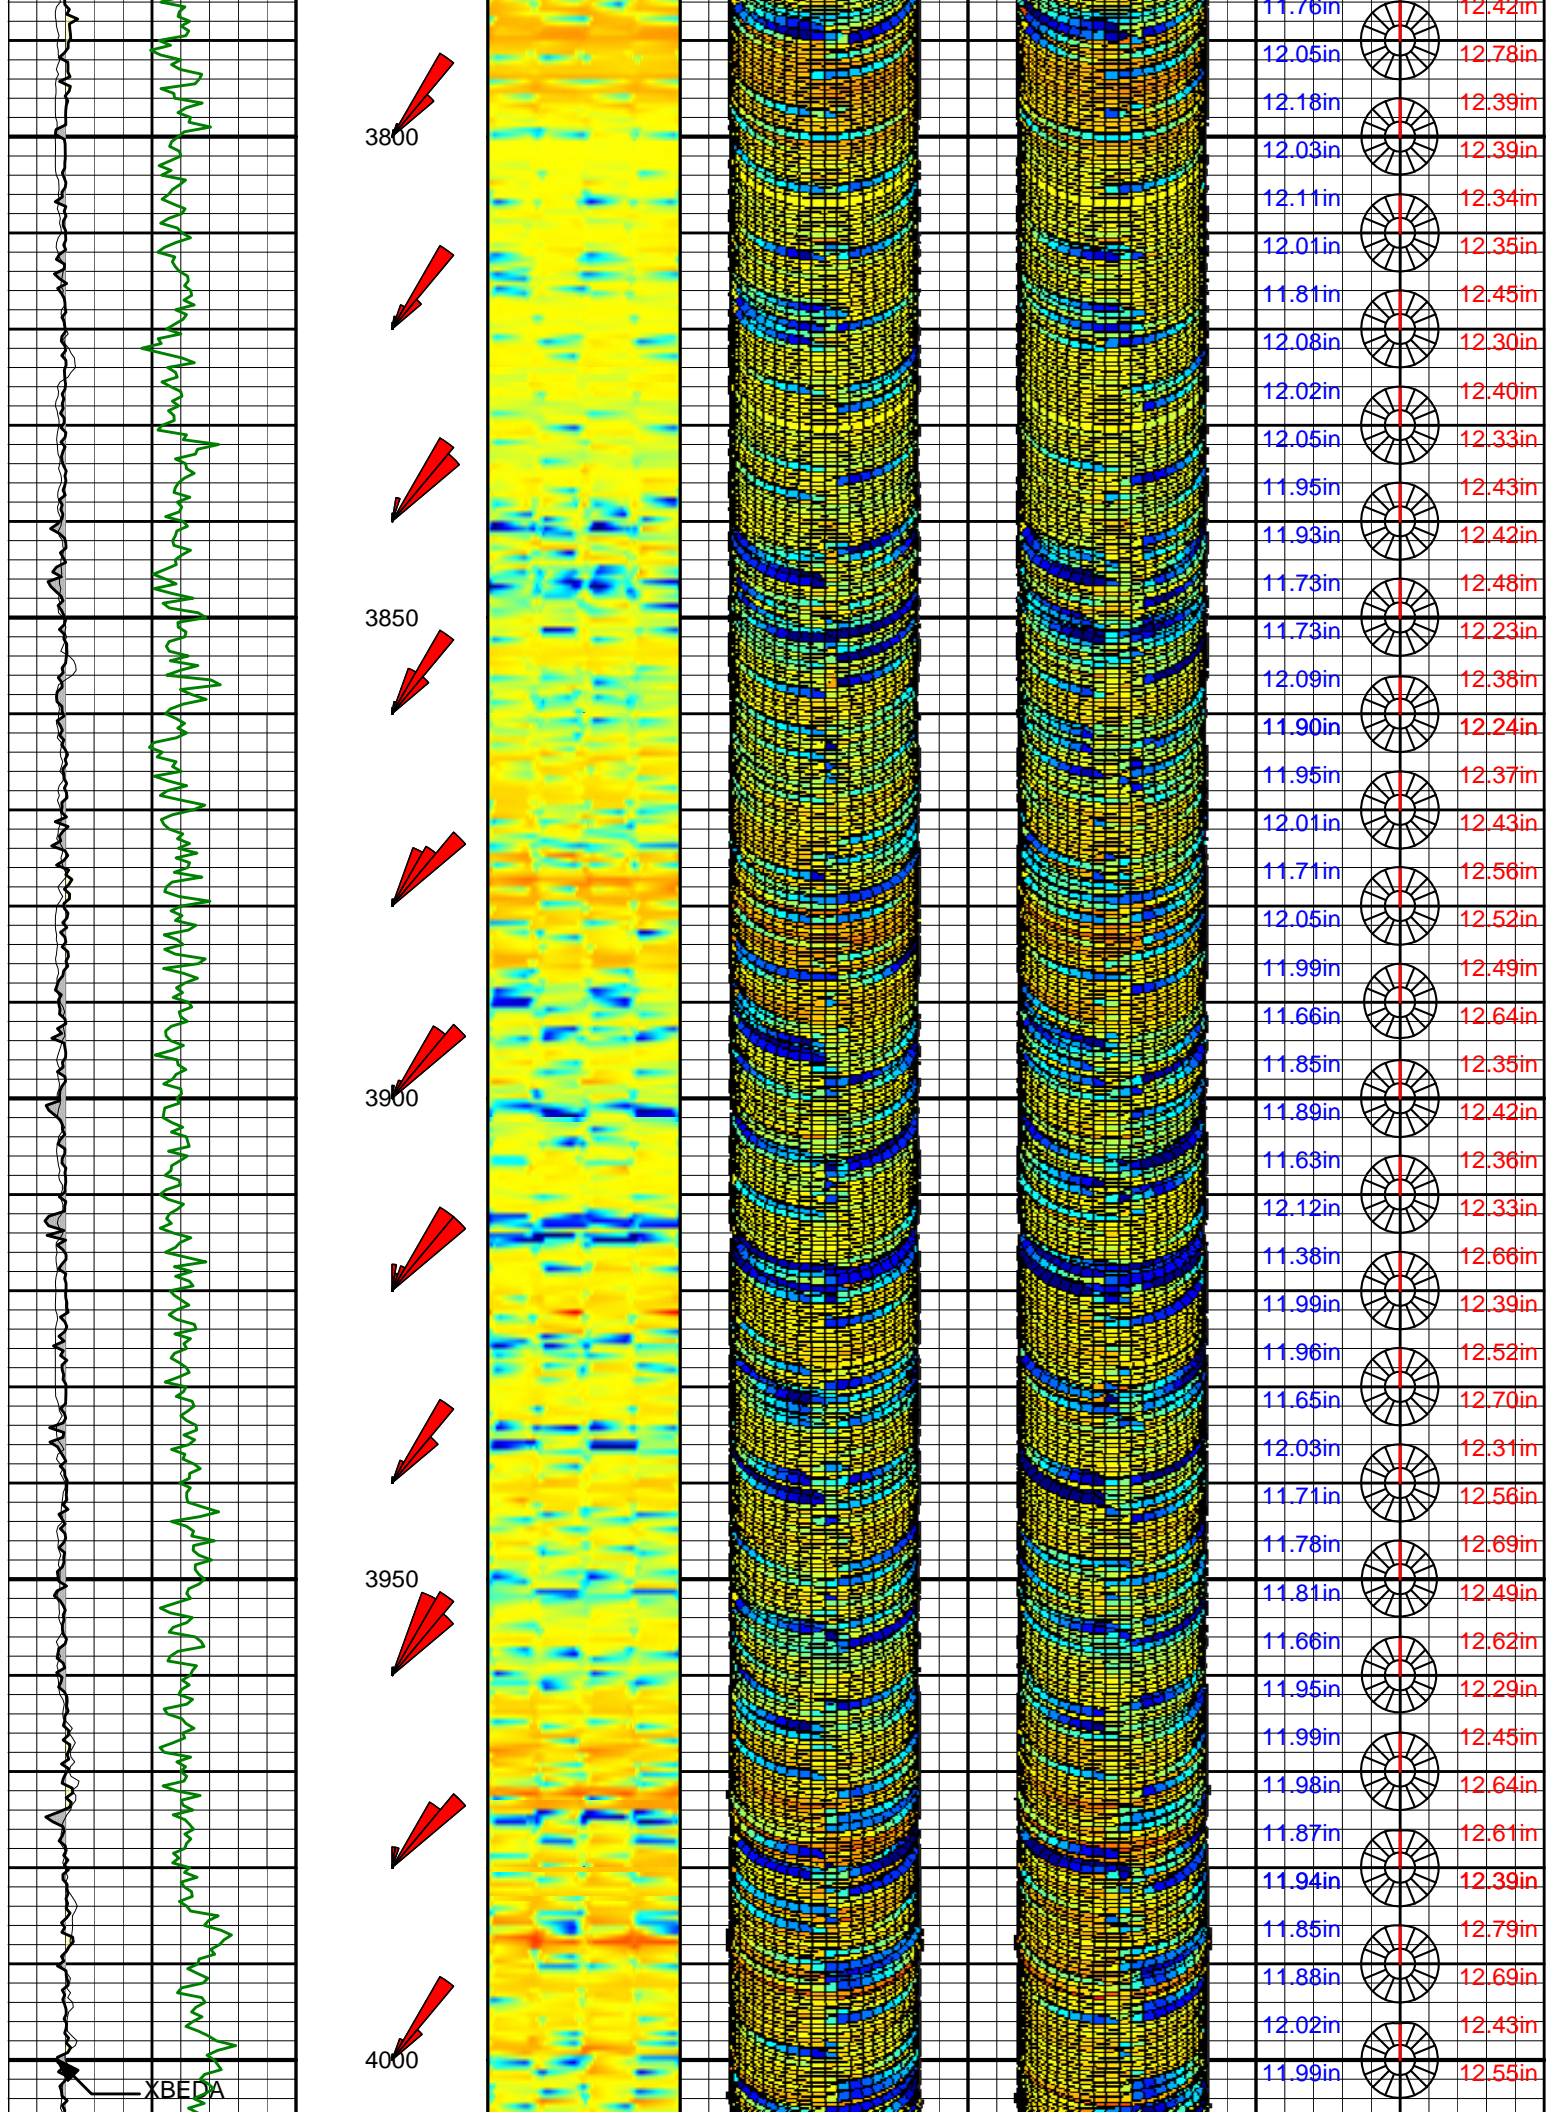

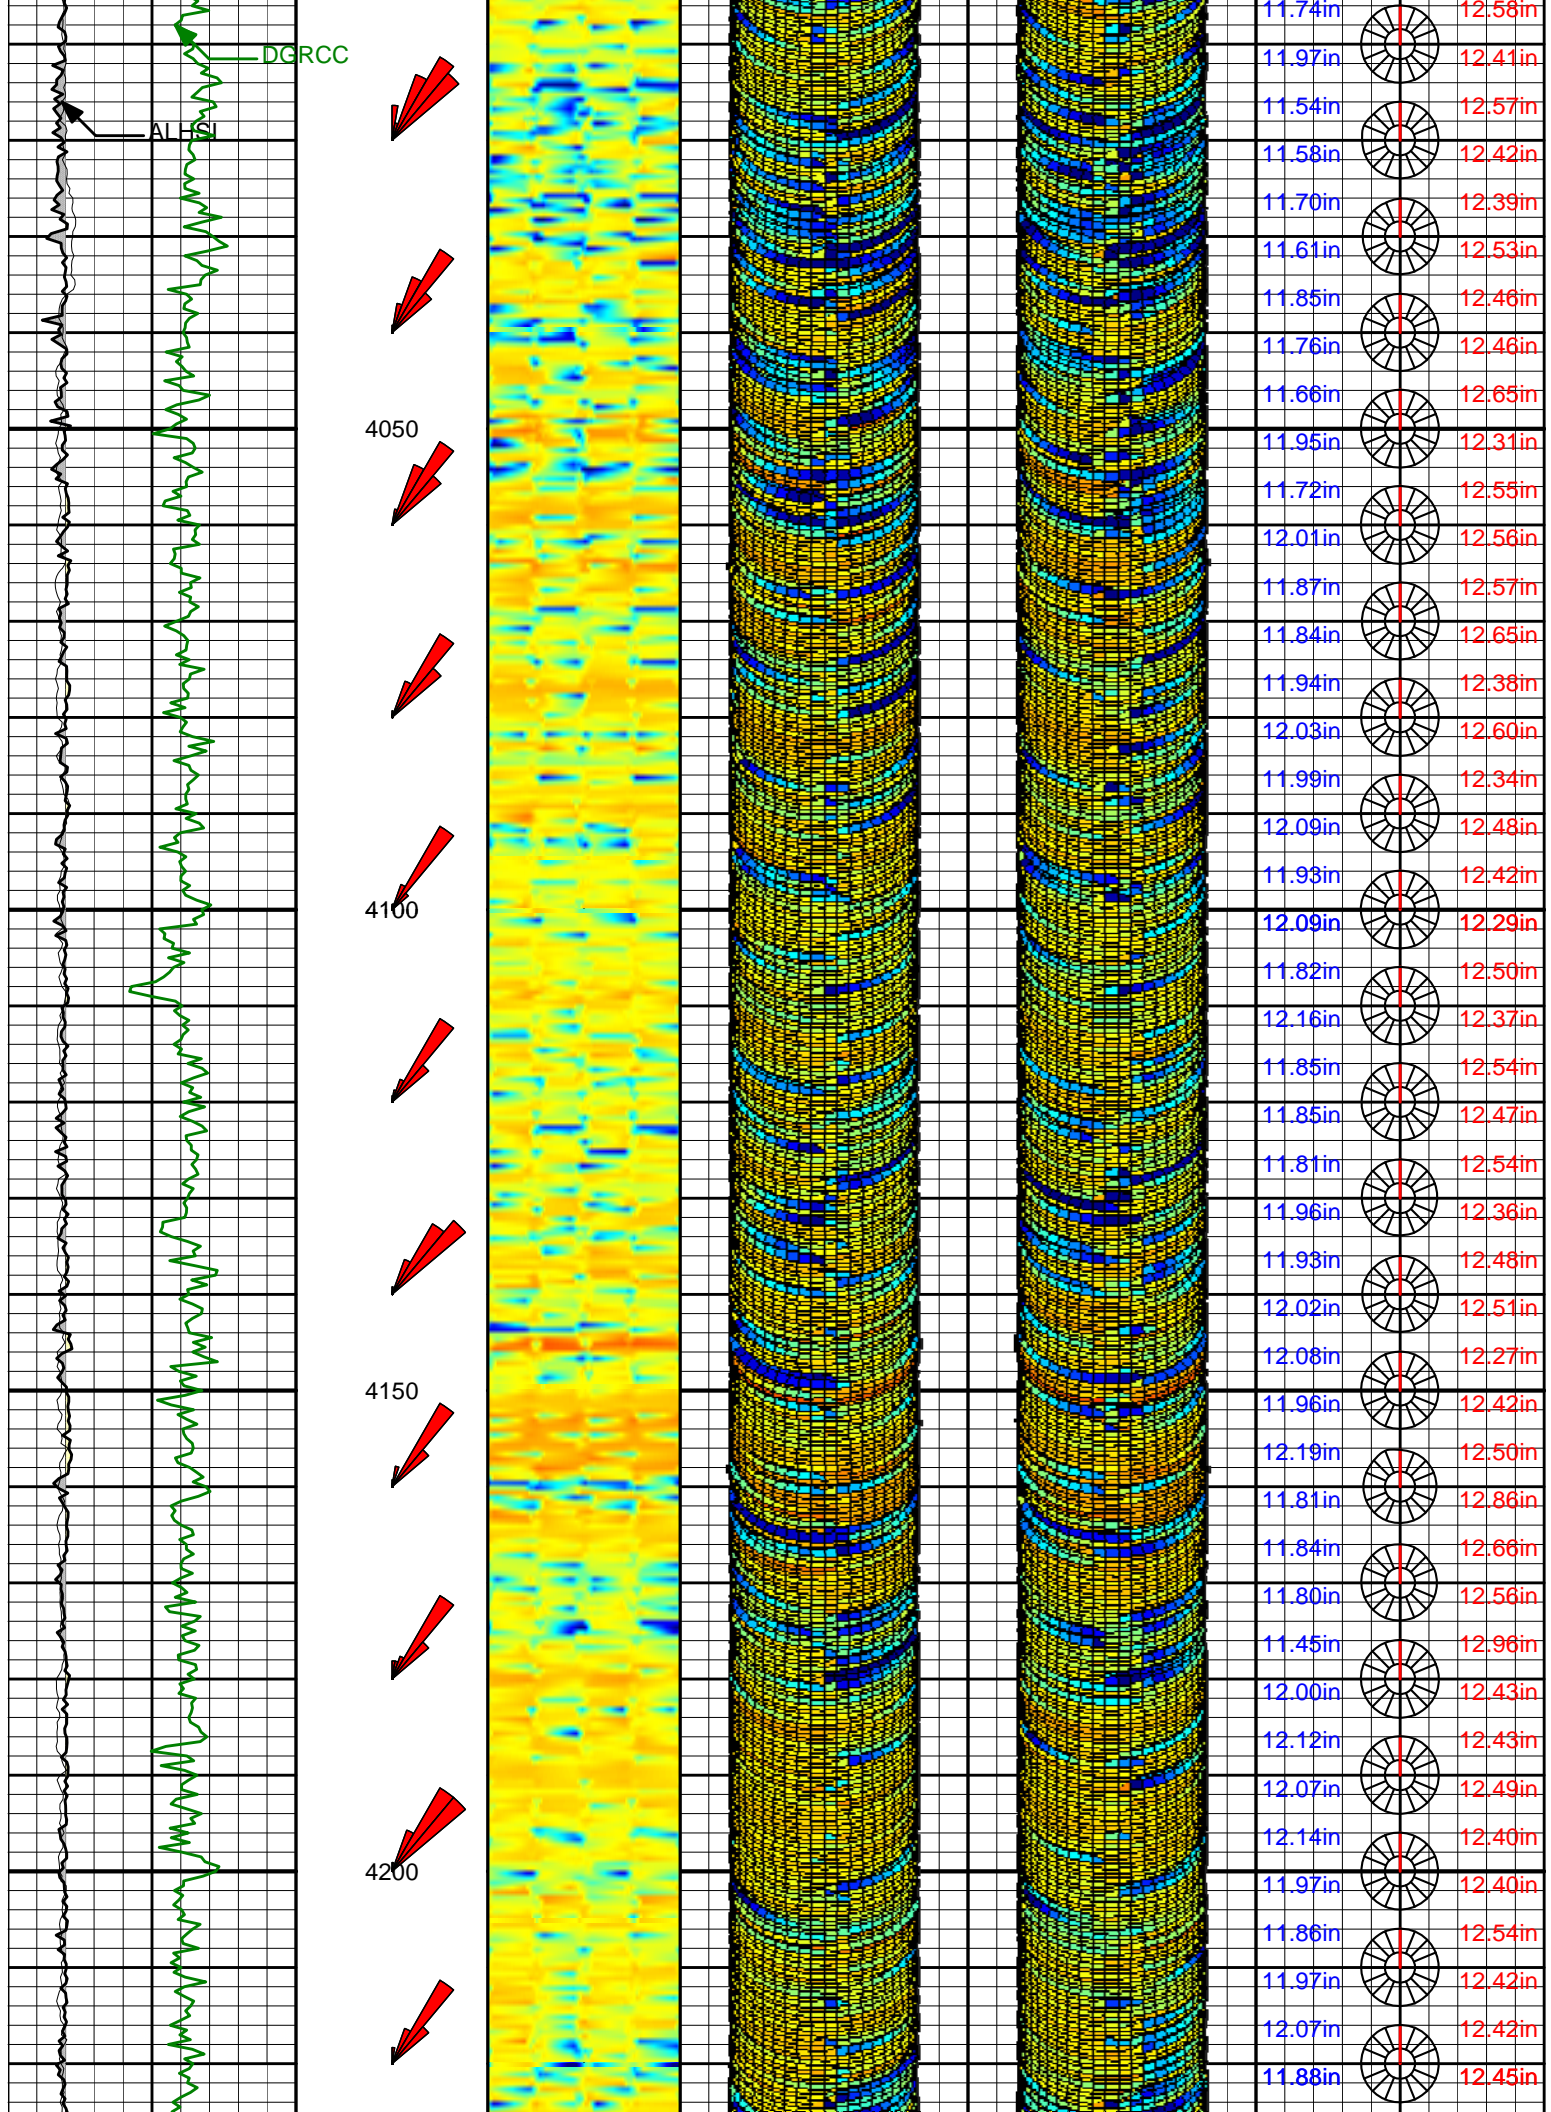

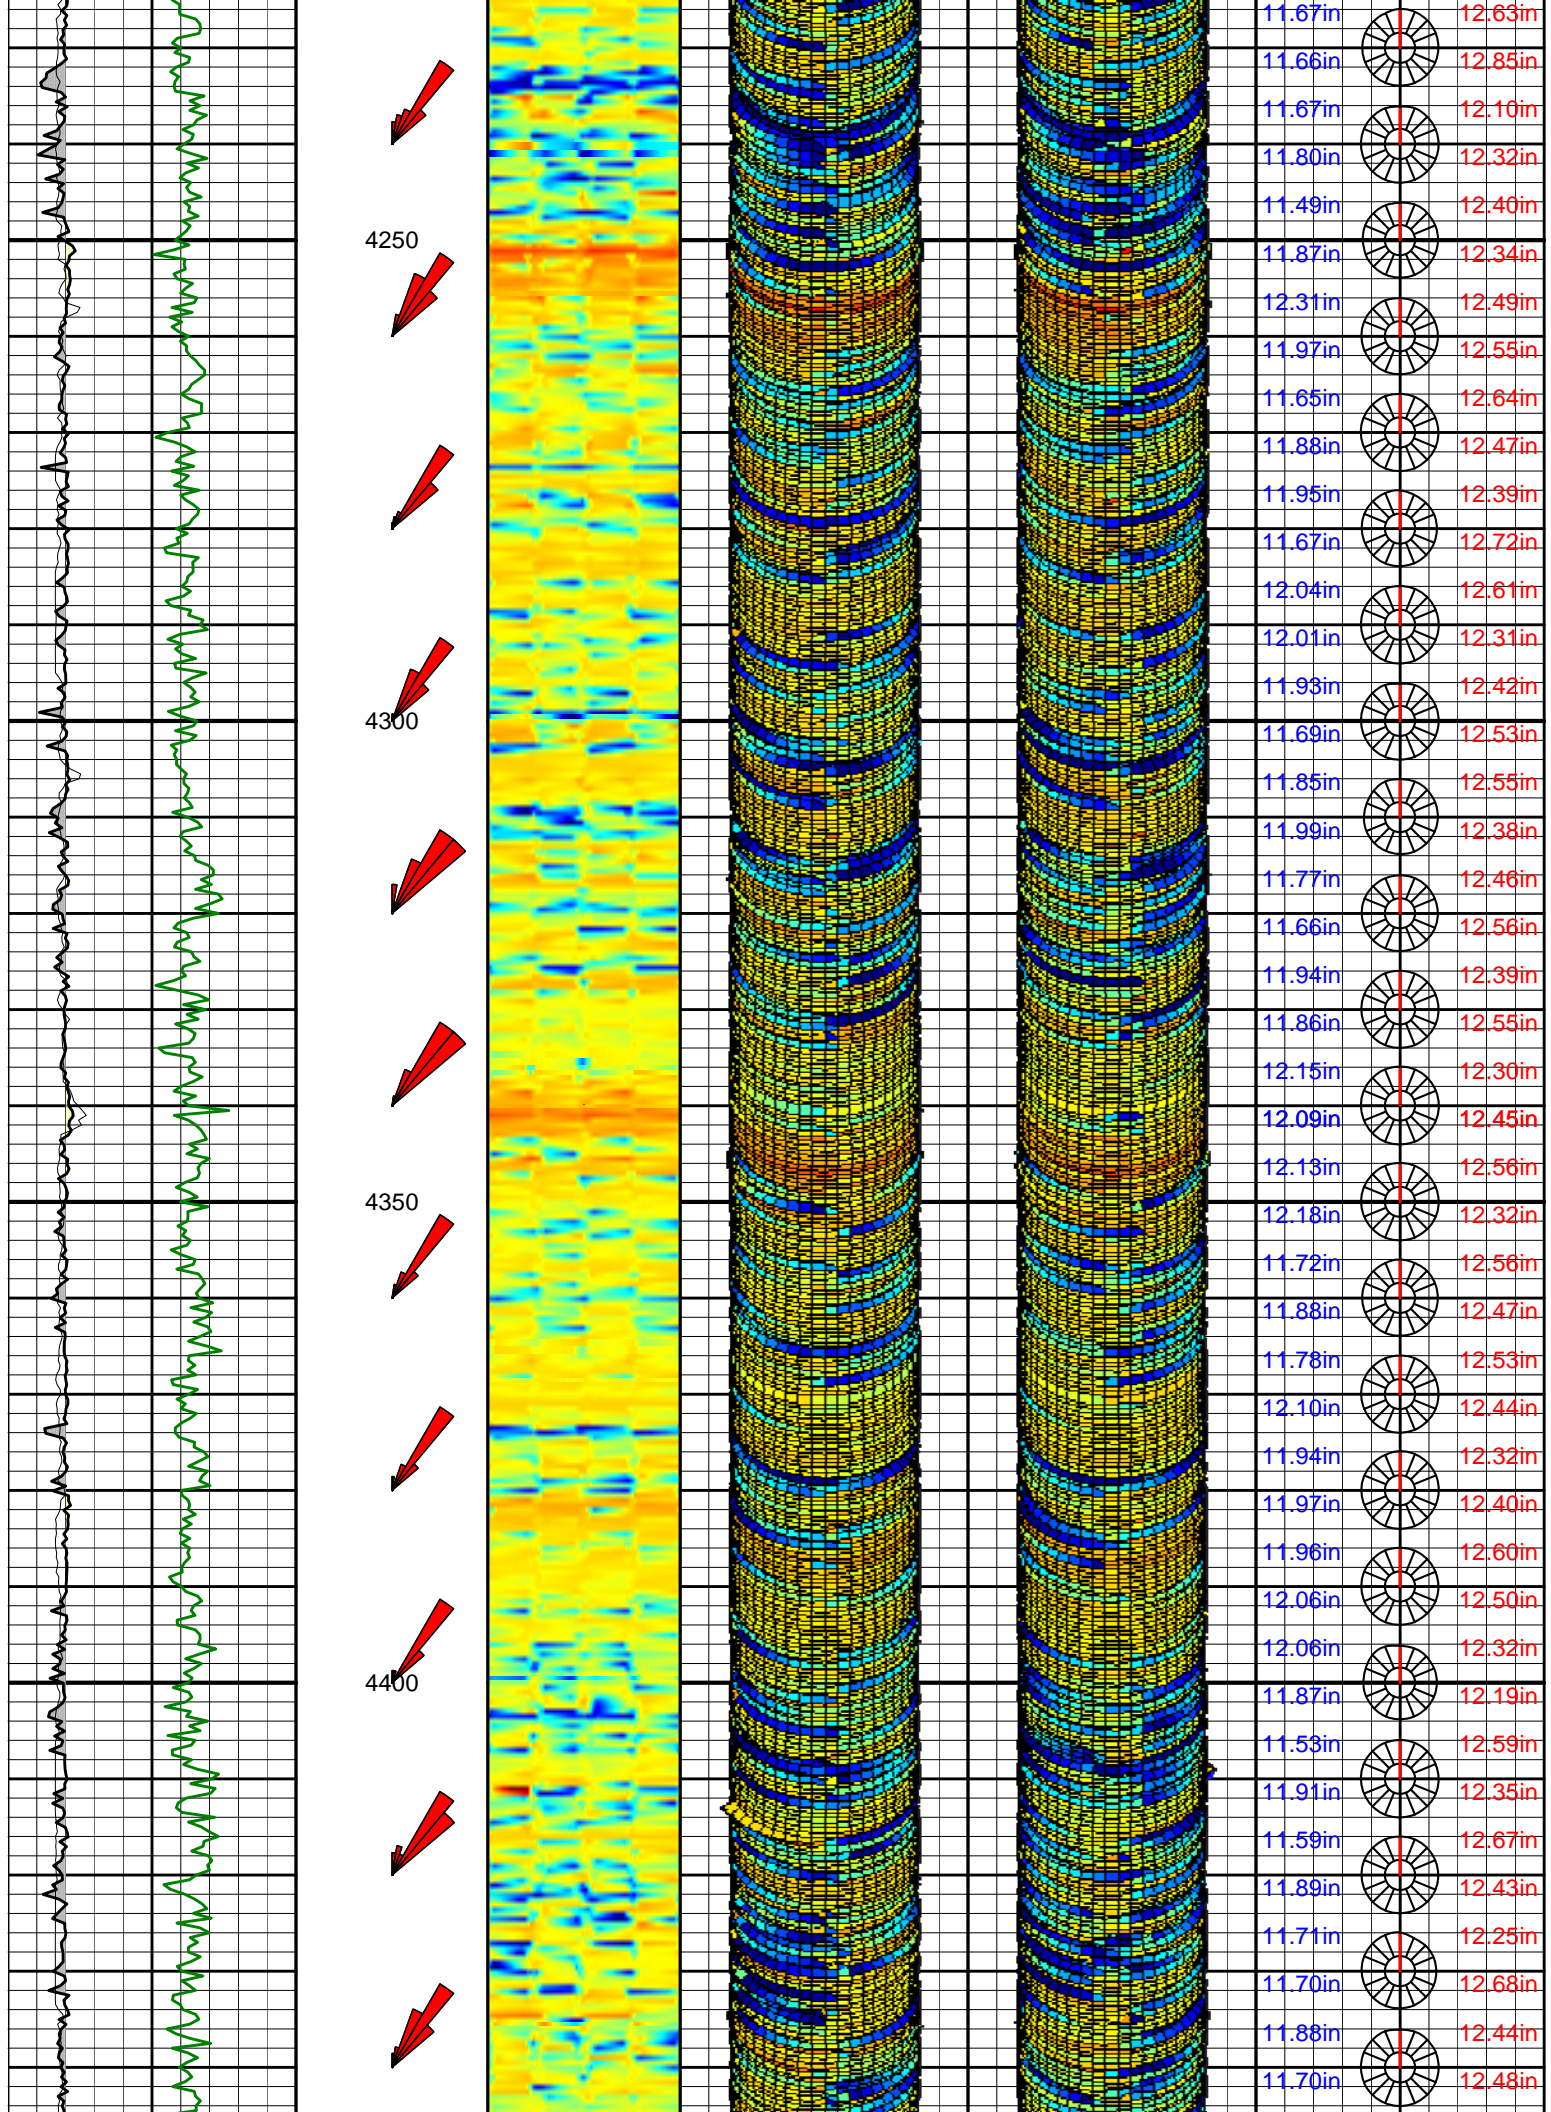

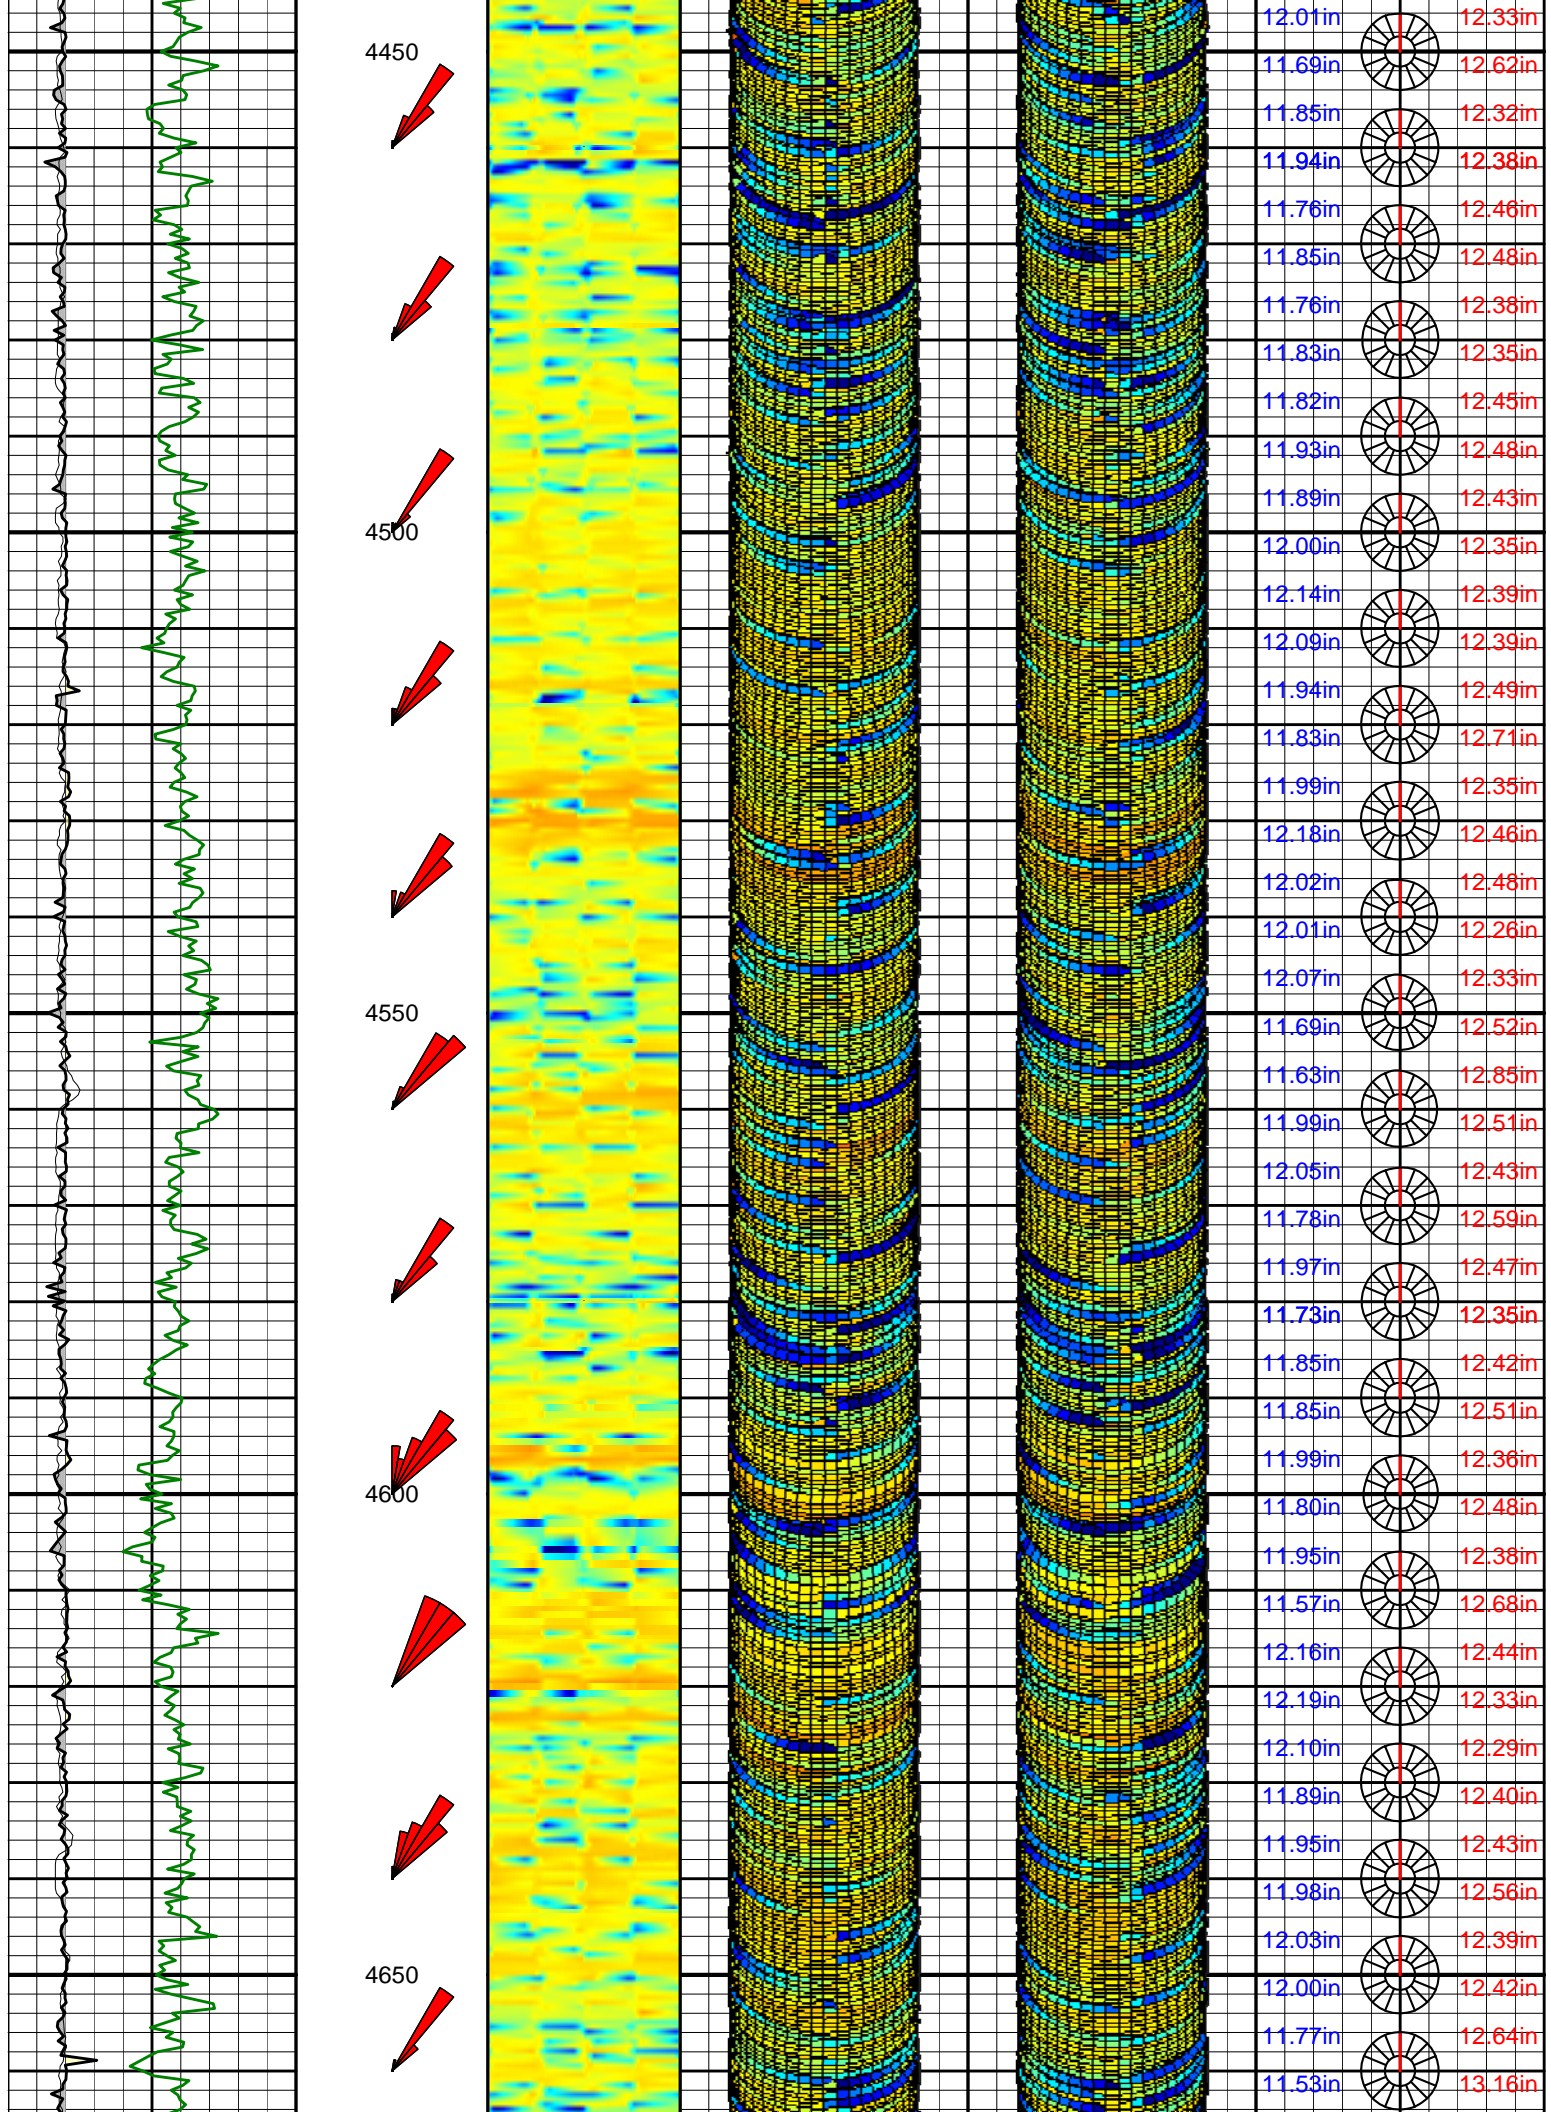

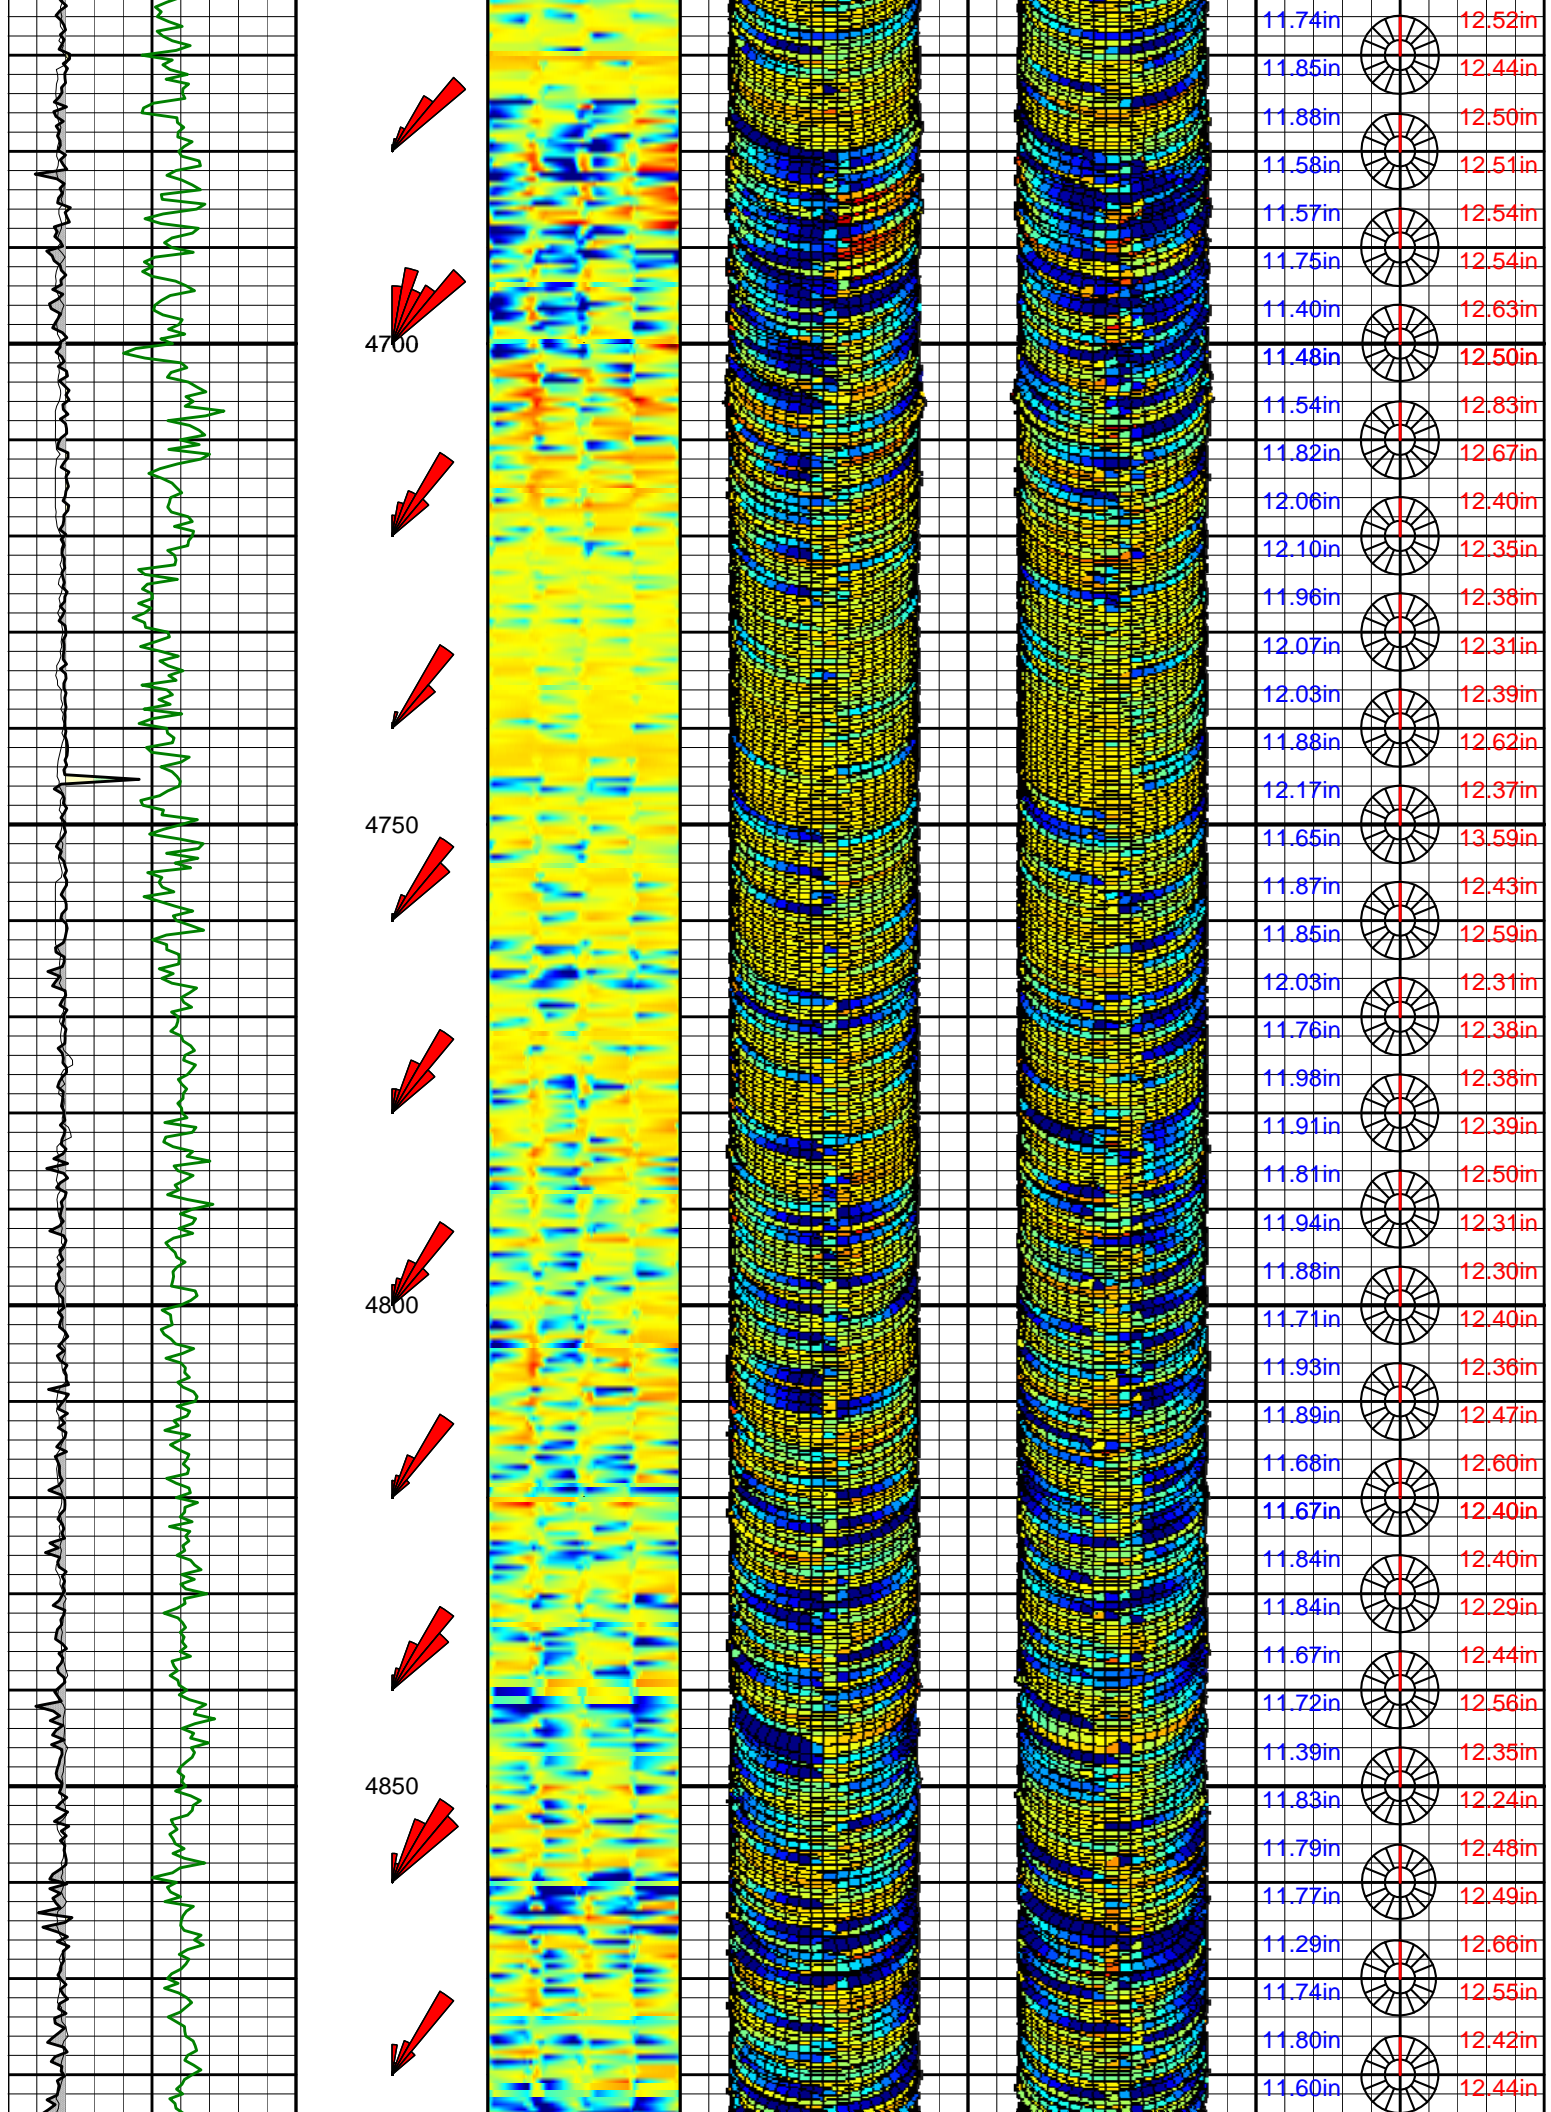


4700


4750

4800

4850

11.74in	12.52in
11.85in	12.44in
11.88in	12.50in
11.58in	12.51in
11.57in	12.54in
11.75in	12.54in
11.40in	12.63in
11.48in	12.50in
11.54in	12.83in
11.82in	12.67in
12.06in	12.40in
12.10in	12.35in
11.96in	12.38in
12.07in	12.31in
12.03in	12.39in
11.88in	12.62in
12.17in	12.37in
11.65in	13.59in
11.87in	12.43in
11.85in	12.59in
12.03in	12.31in
11.76in	12.38in
11.98in	12.38in
11.91in	12.39in
11.81in	12.50in
11.94in	12.31in
11.88in	12.30in
11.71in	12.40in
11.93in	12.36in
11.89in	12.47in
11.68in	12.60in
11.67in	12.40in
11.84in	12.40in
11.84in	12.29in
11.67in	12.44in
11.72in	12.56in
11.39in	12.35in
11.83in	12.24in
11.79in	12.48in
11.77in	12.49in
11.29in	12.66in
11.74in	12.55in
11.80in	12.42in
11.60in	12.44in

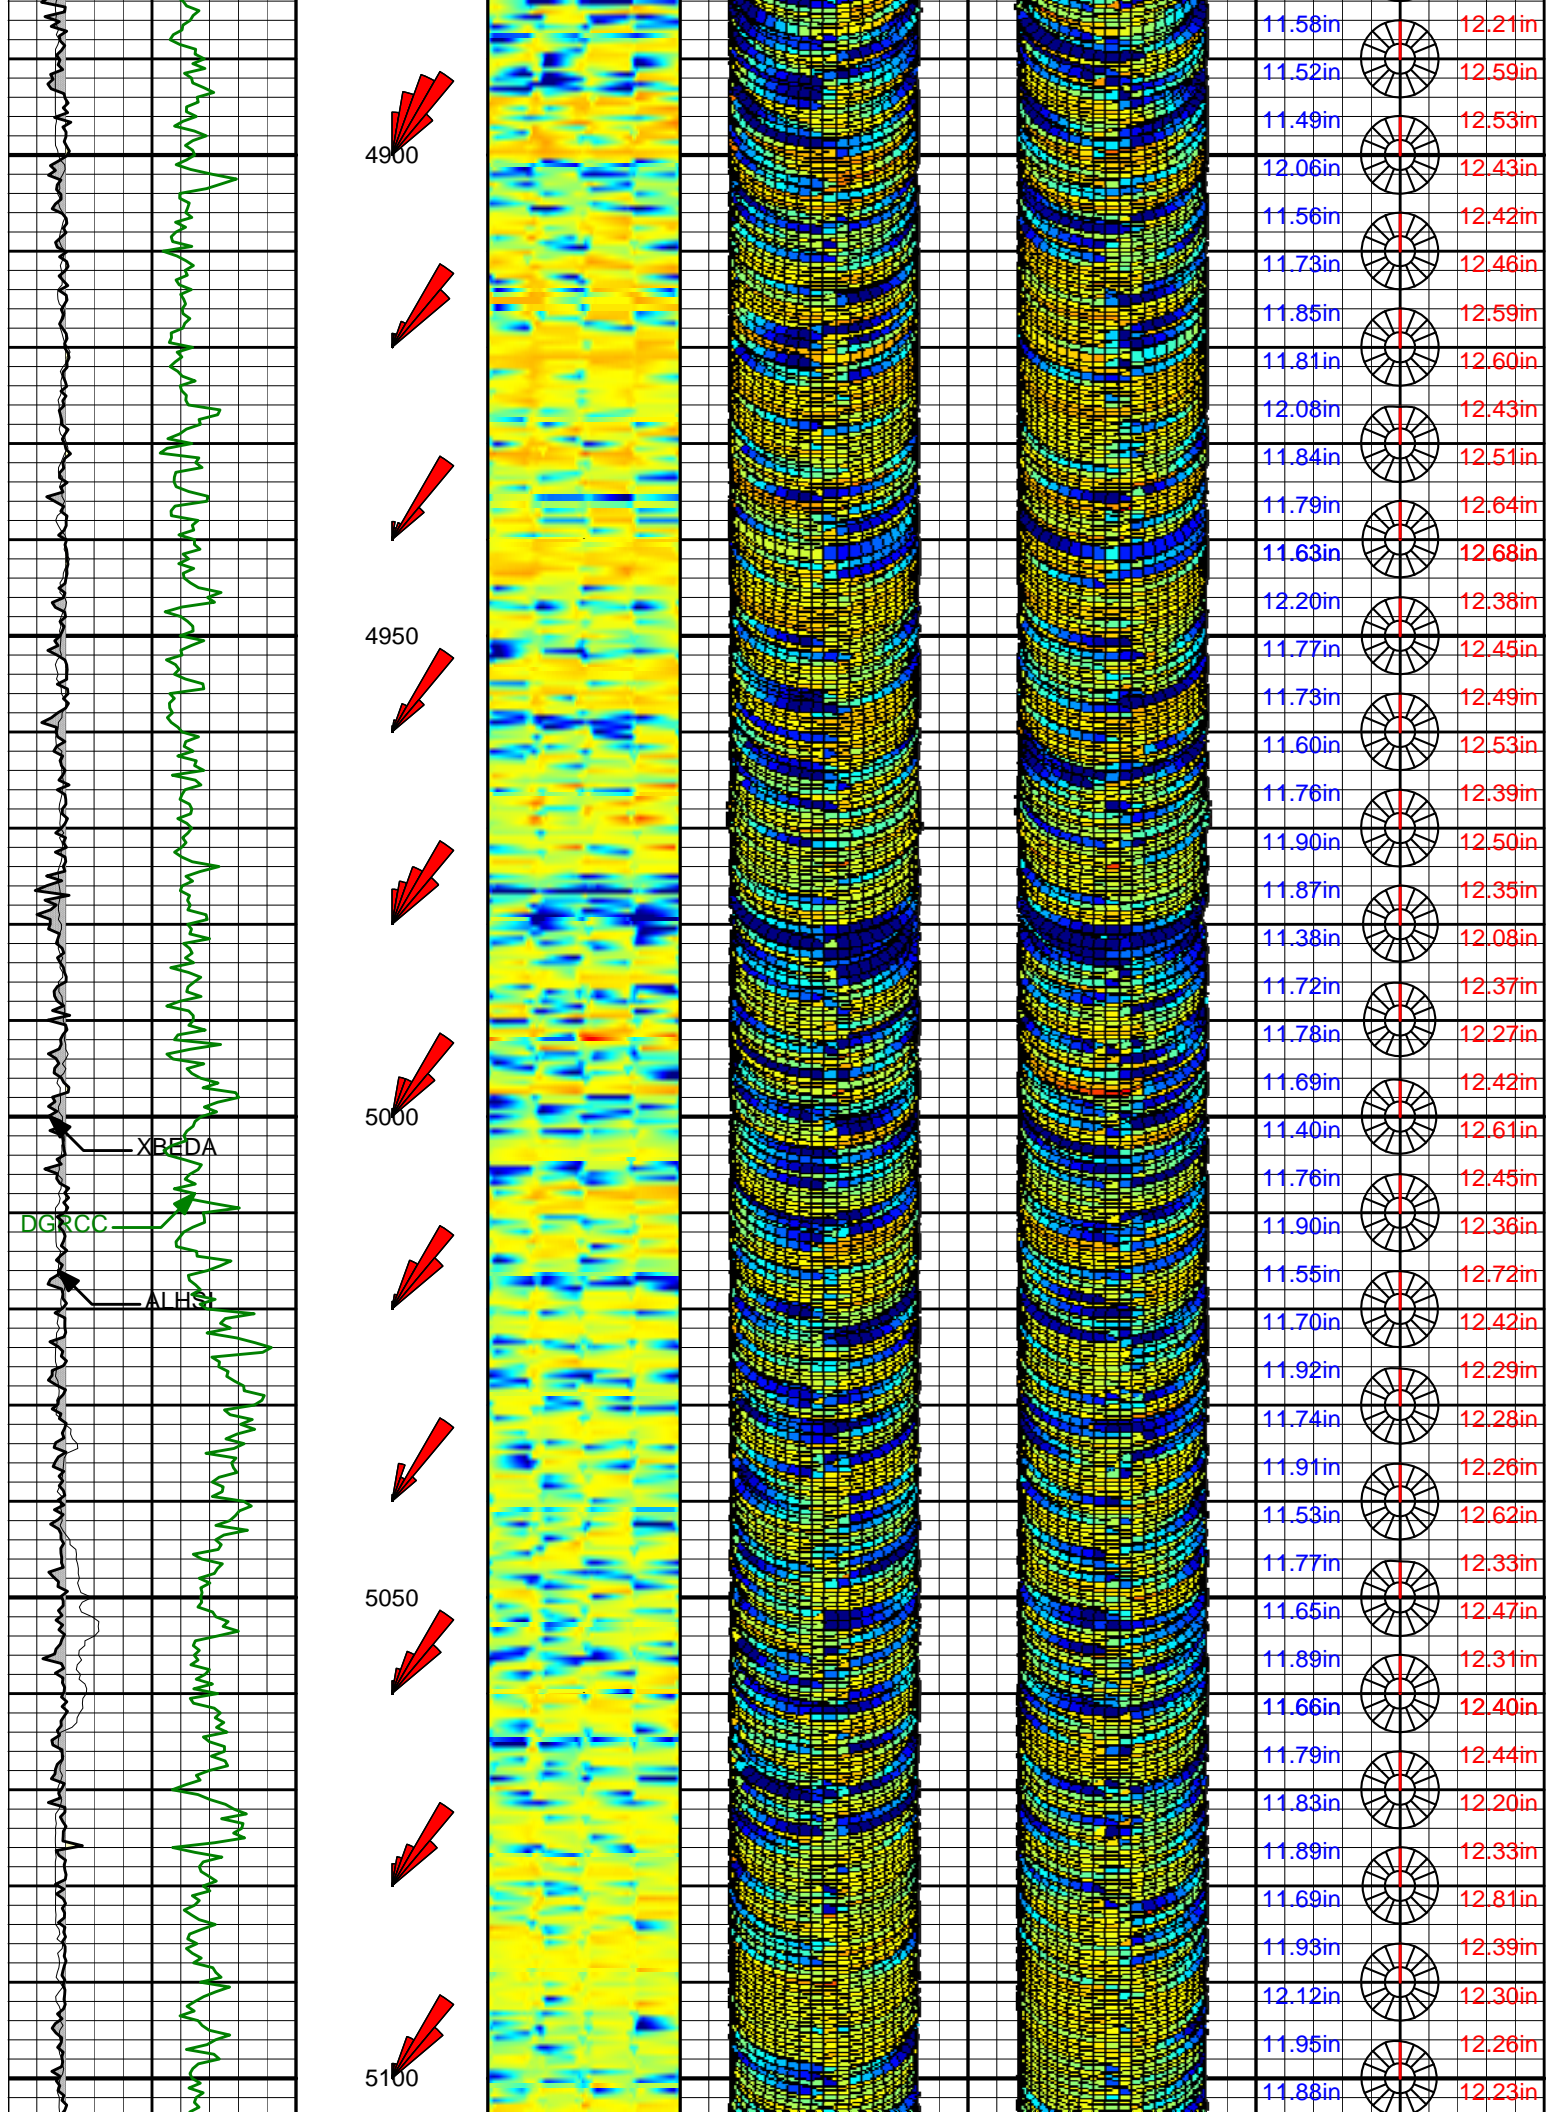

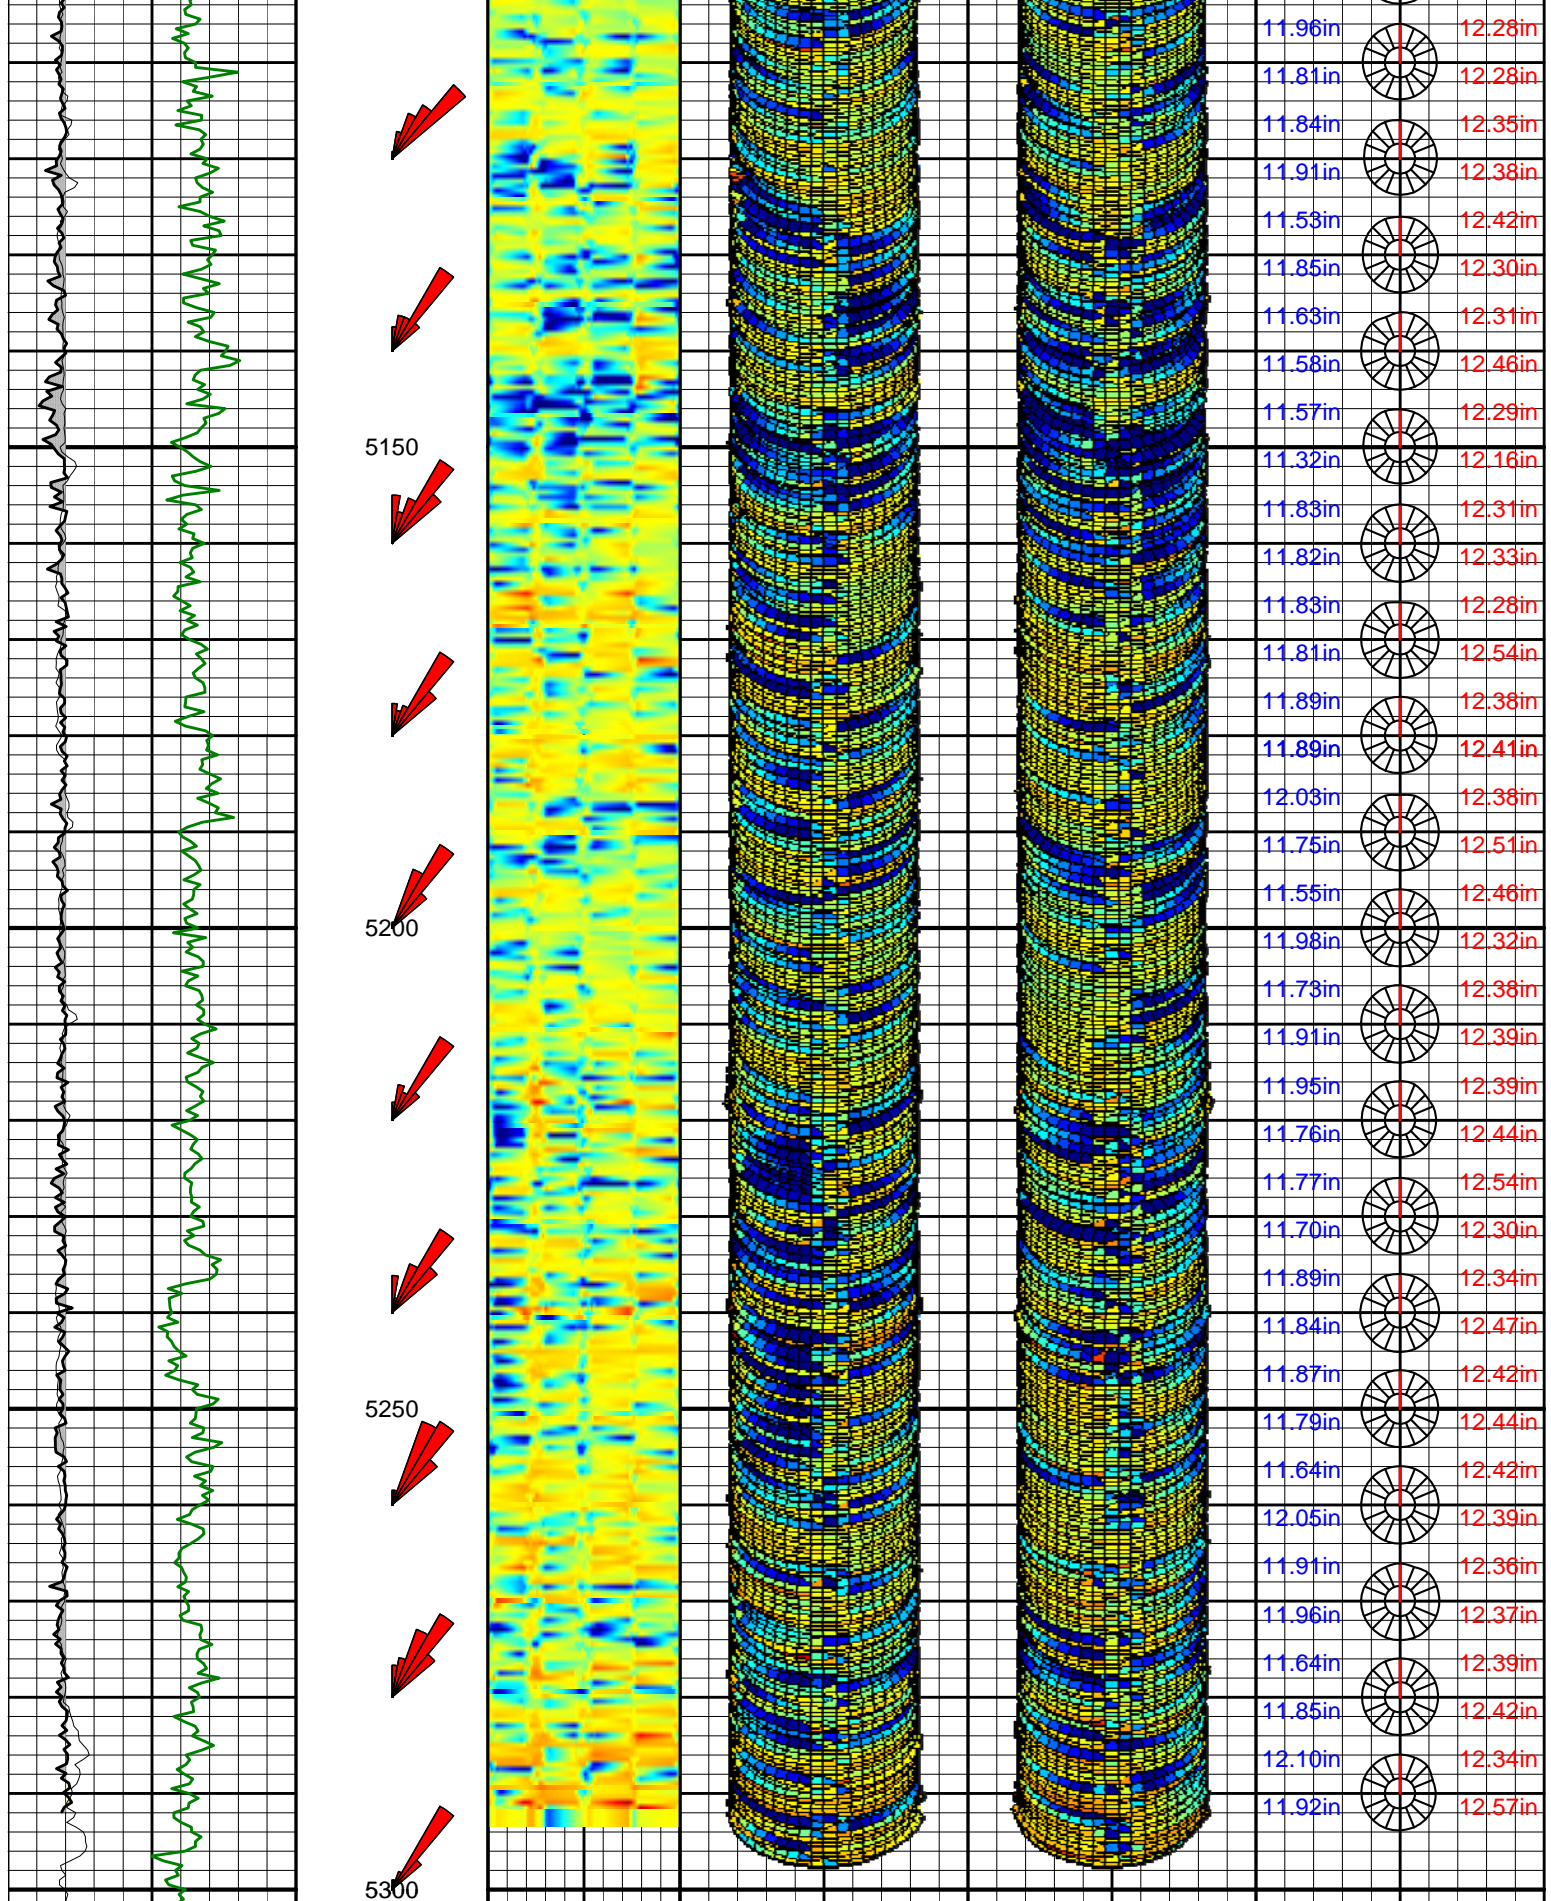


5150

5200



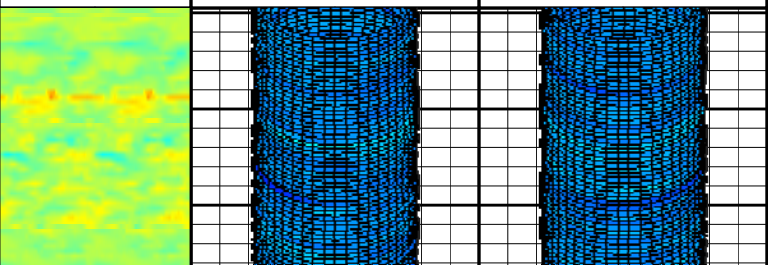





5250


5300


5350


Hole Enlargement Under Minor Medium Severe <1" 1"-2" >2"		TVD ft 1 : 240	XCAL Image 5.5 Inches 6.5	XCAL 3D Plot Trace South 5.5 6.5	XCAL 3D Plot Trace North 5.5 6.5	XCAL Max Ellipse Diameter XCAL Min Ellipse Diameter
ALD Hole Size Indicator inches 10.25 20.25			XCAL Ellipse Direction 			
DGR Comb Gamma Ray BCorr api 0 150						
XCAL Ellipse Avg Diameter inches 10.25 20.25						


LWD R700 - 8.50" ZONE OF INTEREST


XCAL Ellipse Avg Diameter inches 6.5 16.5						
DGR Comb Gamma Ray BCorr api 0 150						
ALD Hole Size Indicator inches 6.5 16.5		XCAL Ellipse Direction 				
Hole Enlargement Under Minor Medium Severe <1" 1"-2" >2"		TVD ft 1 : 240	XCAL Image 4 Inches 4.5	XCAL 3D Plot Trace South 4 5	XCAL 3D Plot Trace North 4 5	XCAL Max Ellipse Diameter XCAL Min Ellipse Diameter
						
						8.50in  8.59in 8.49in  8.58in 8.51in  8.60in 8.49in  8.59in 8.51in  8.58in 8.51in 8.58in

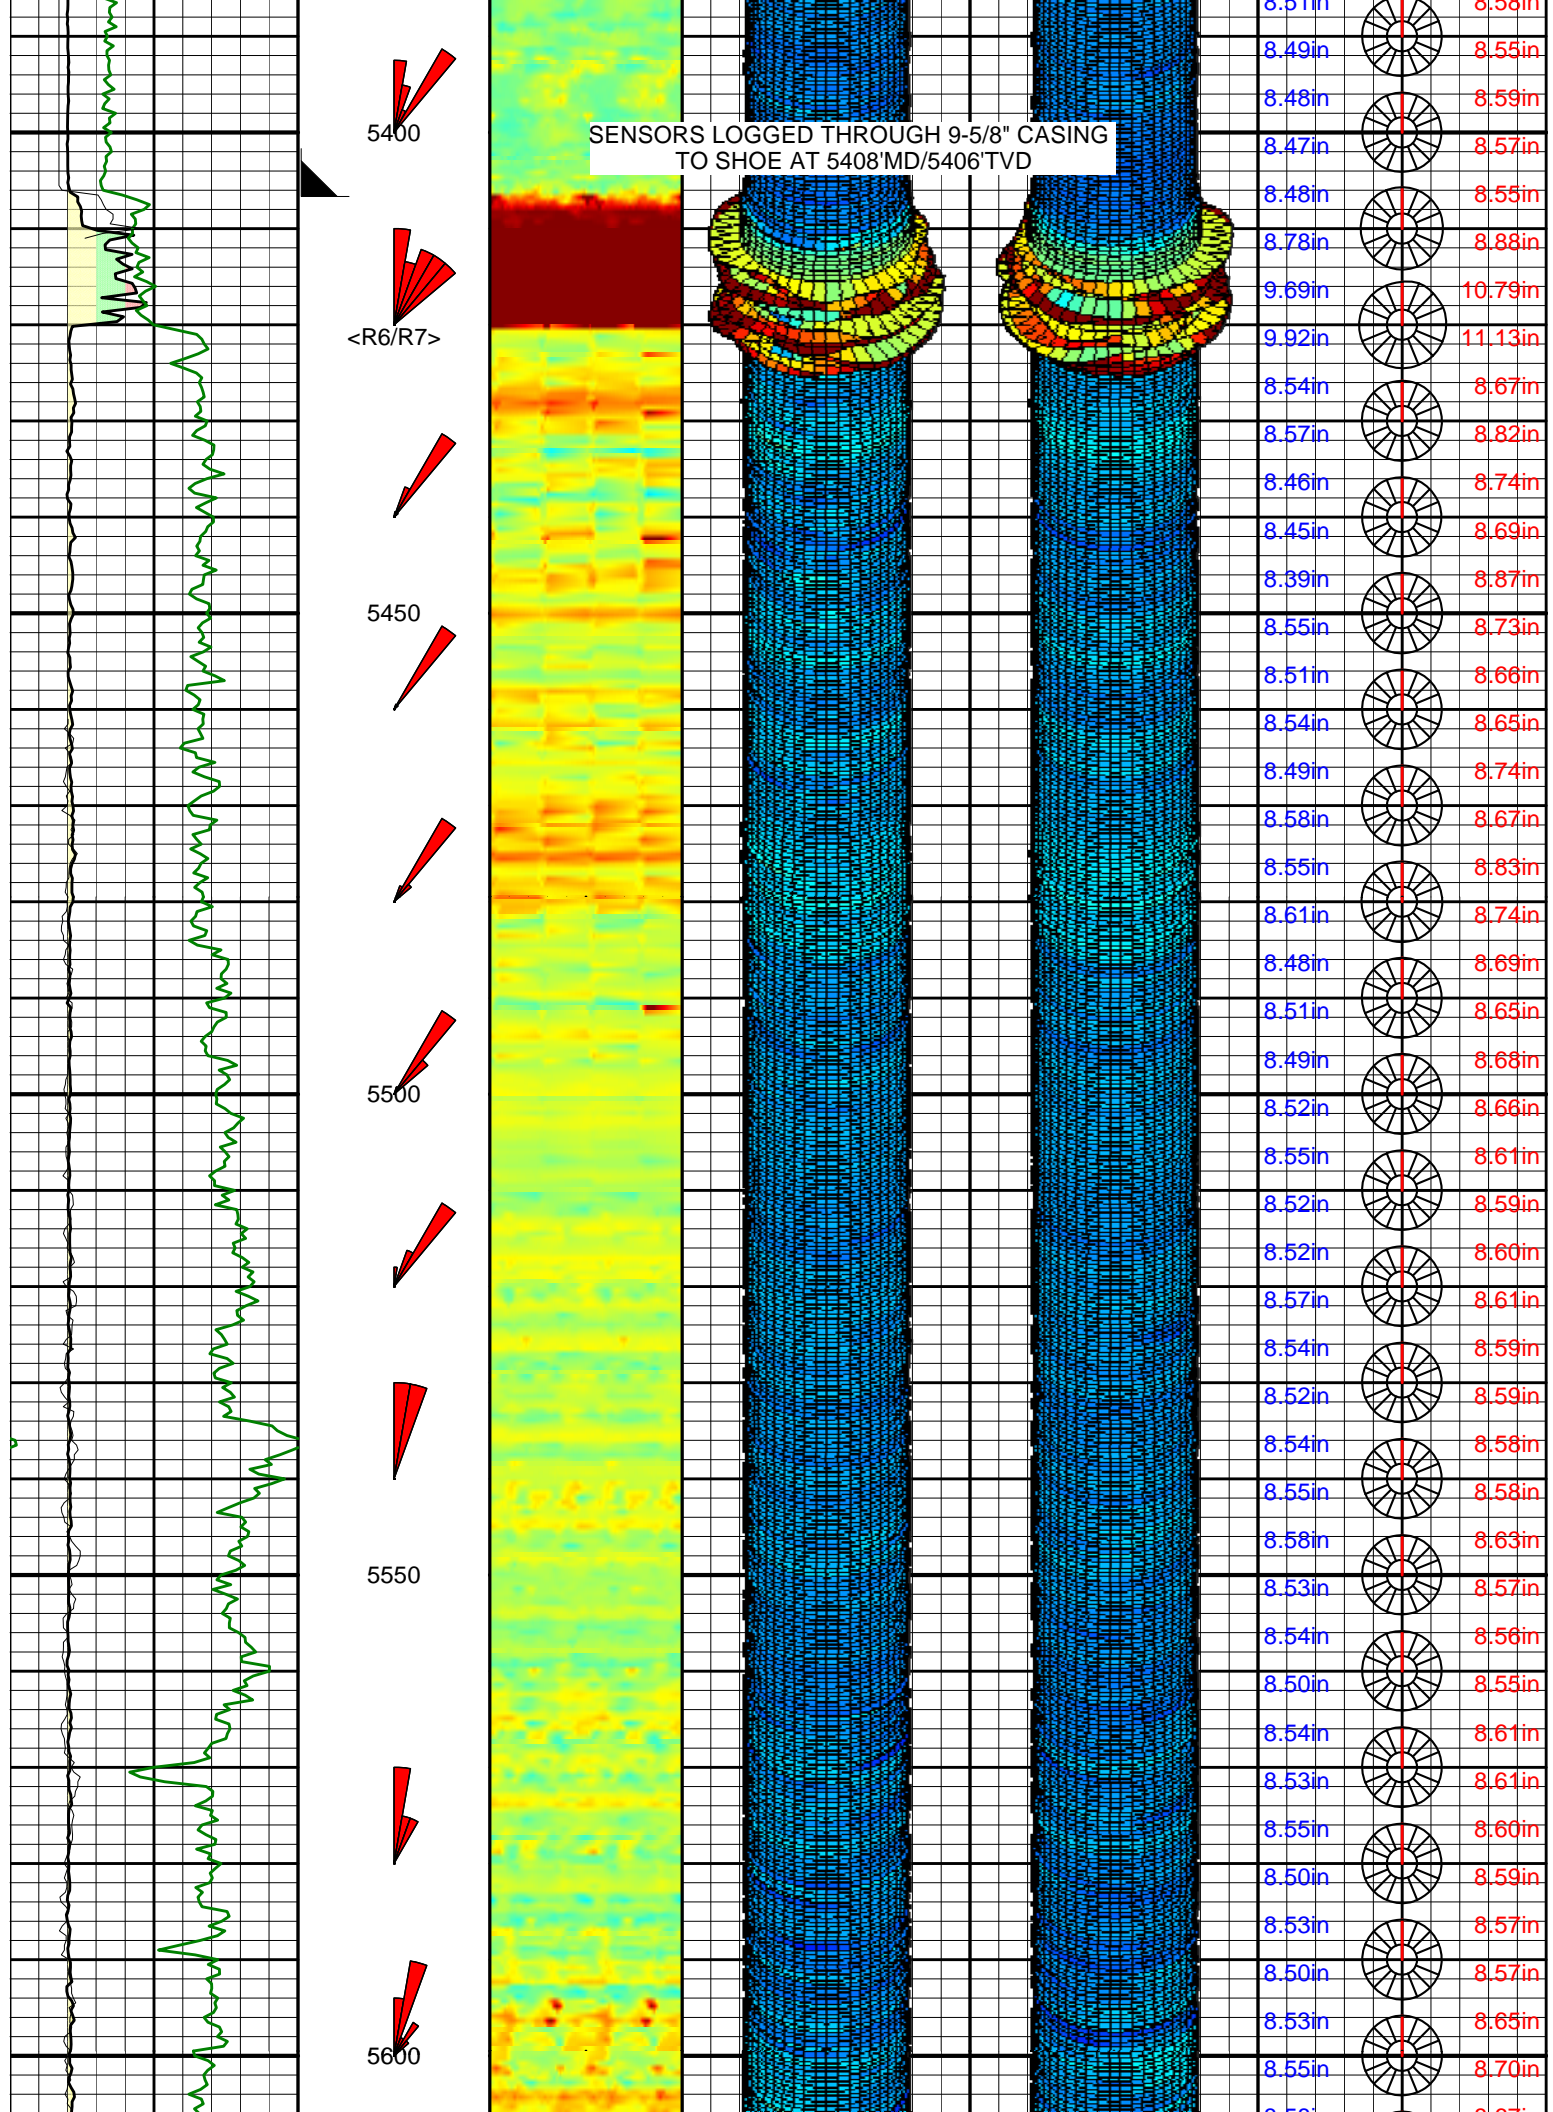


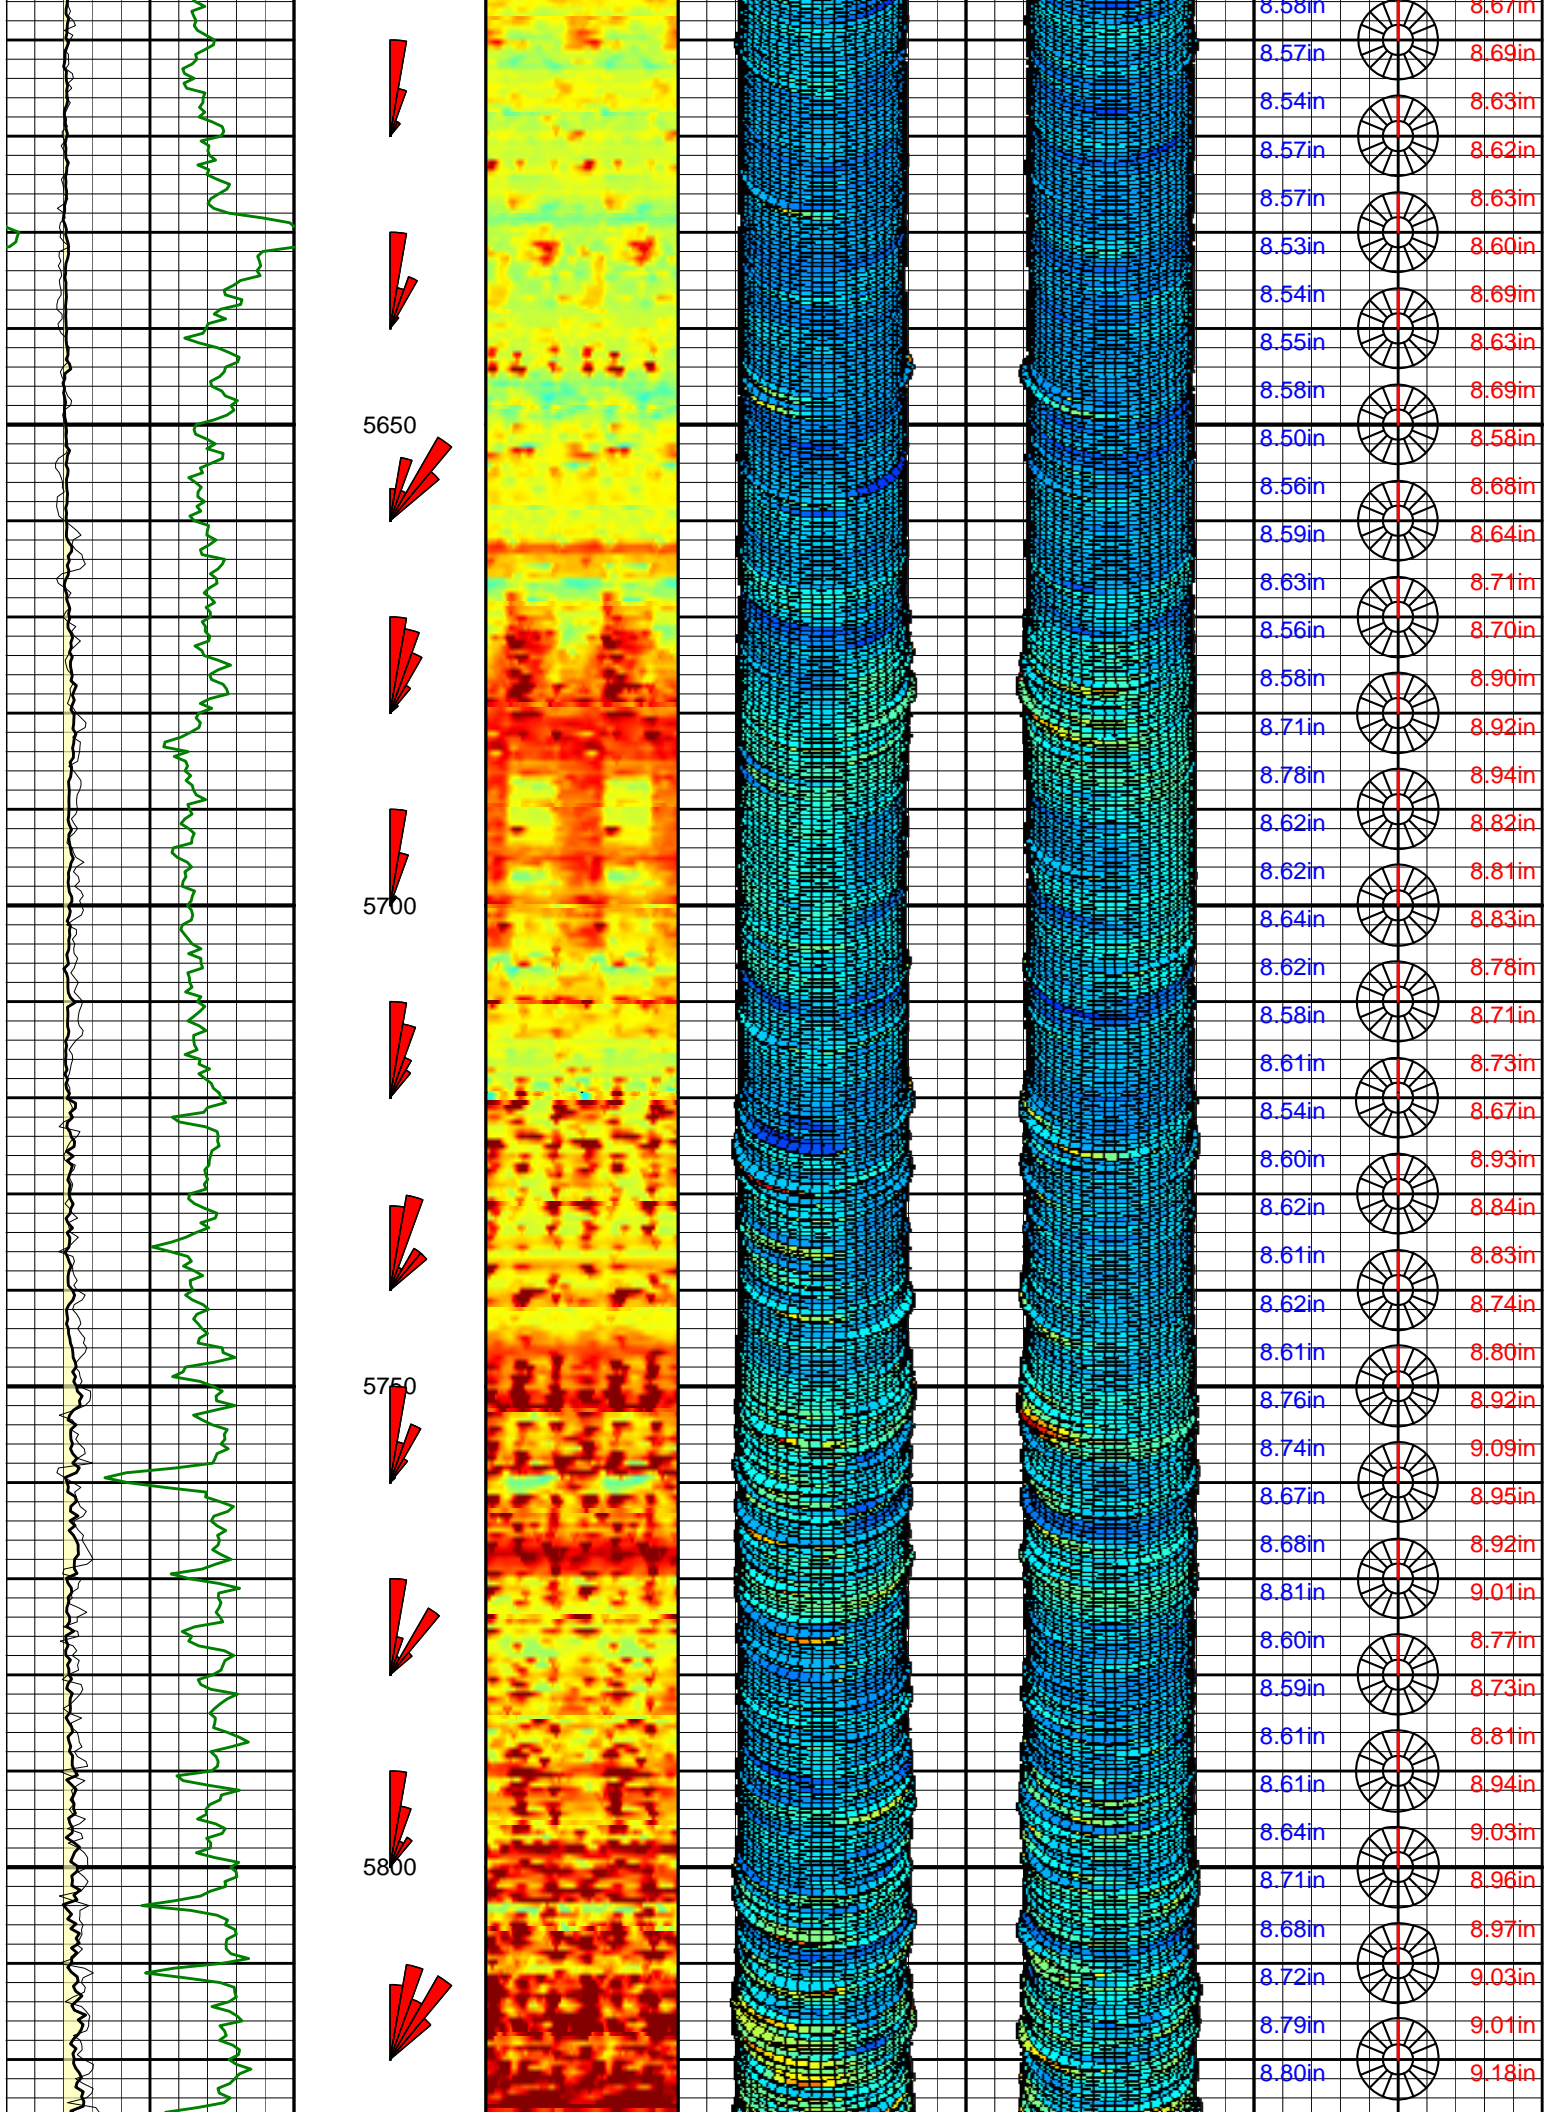


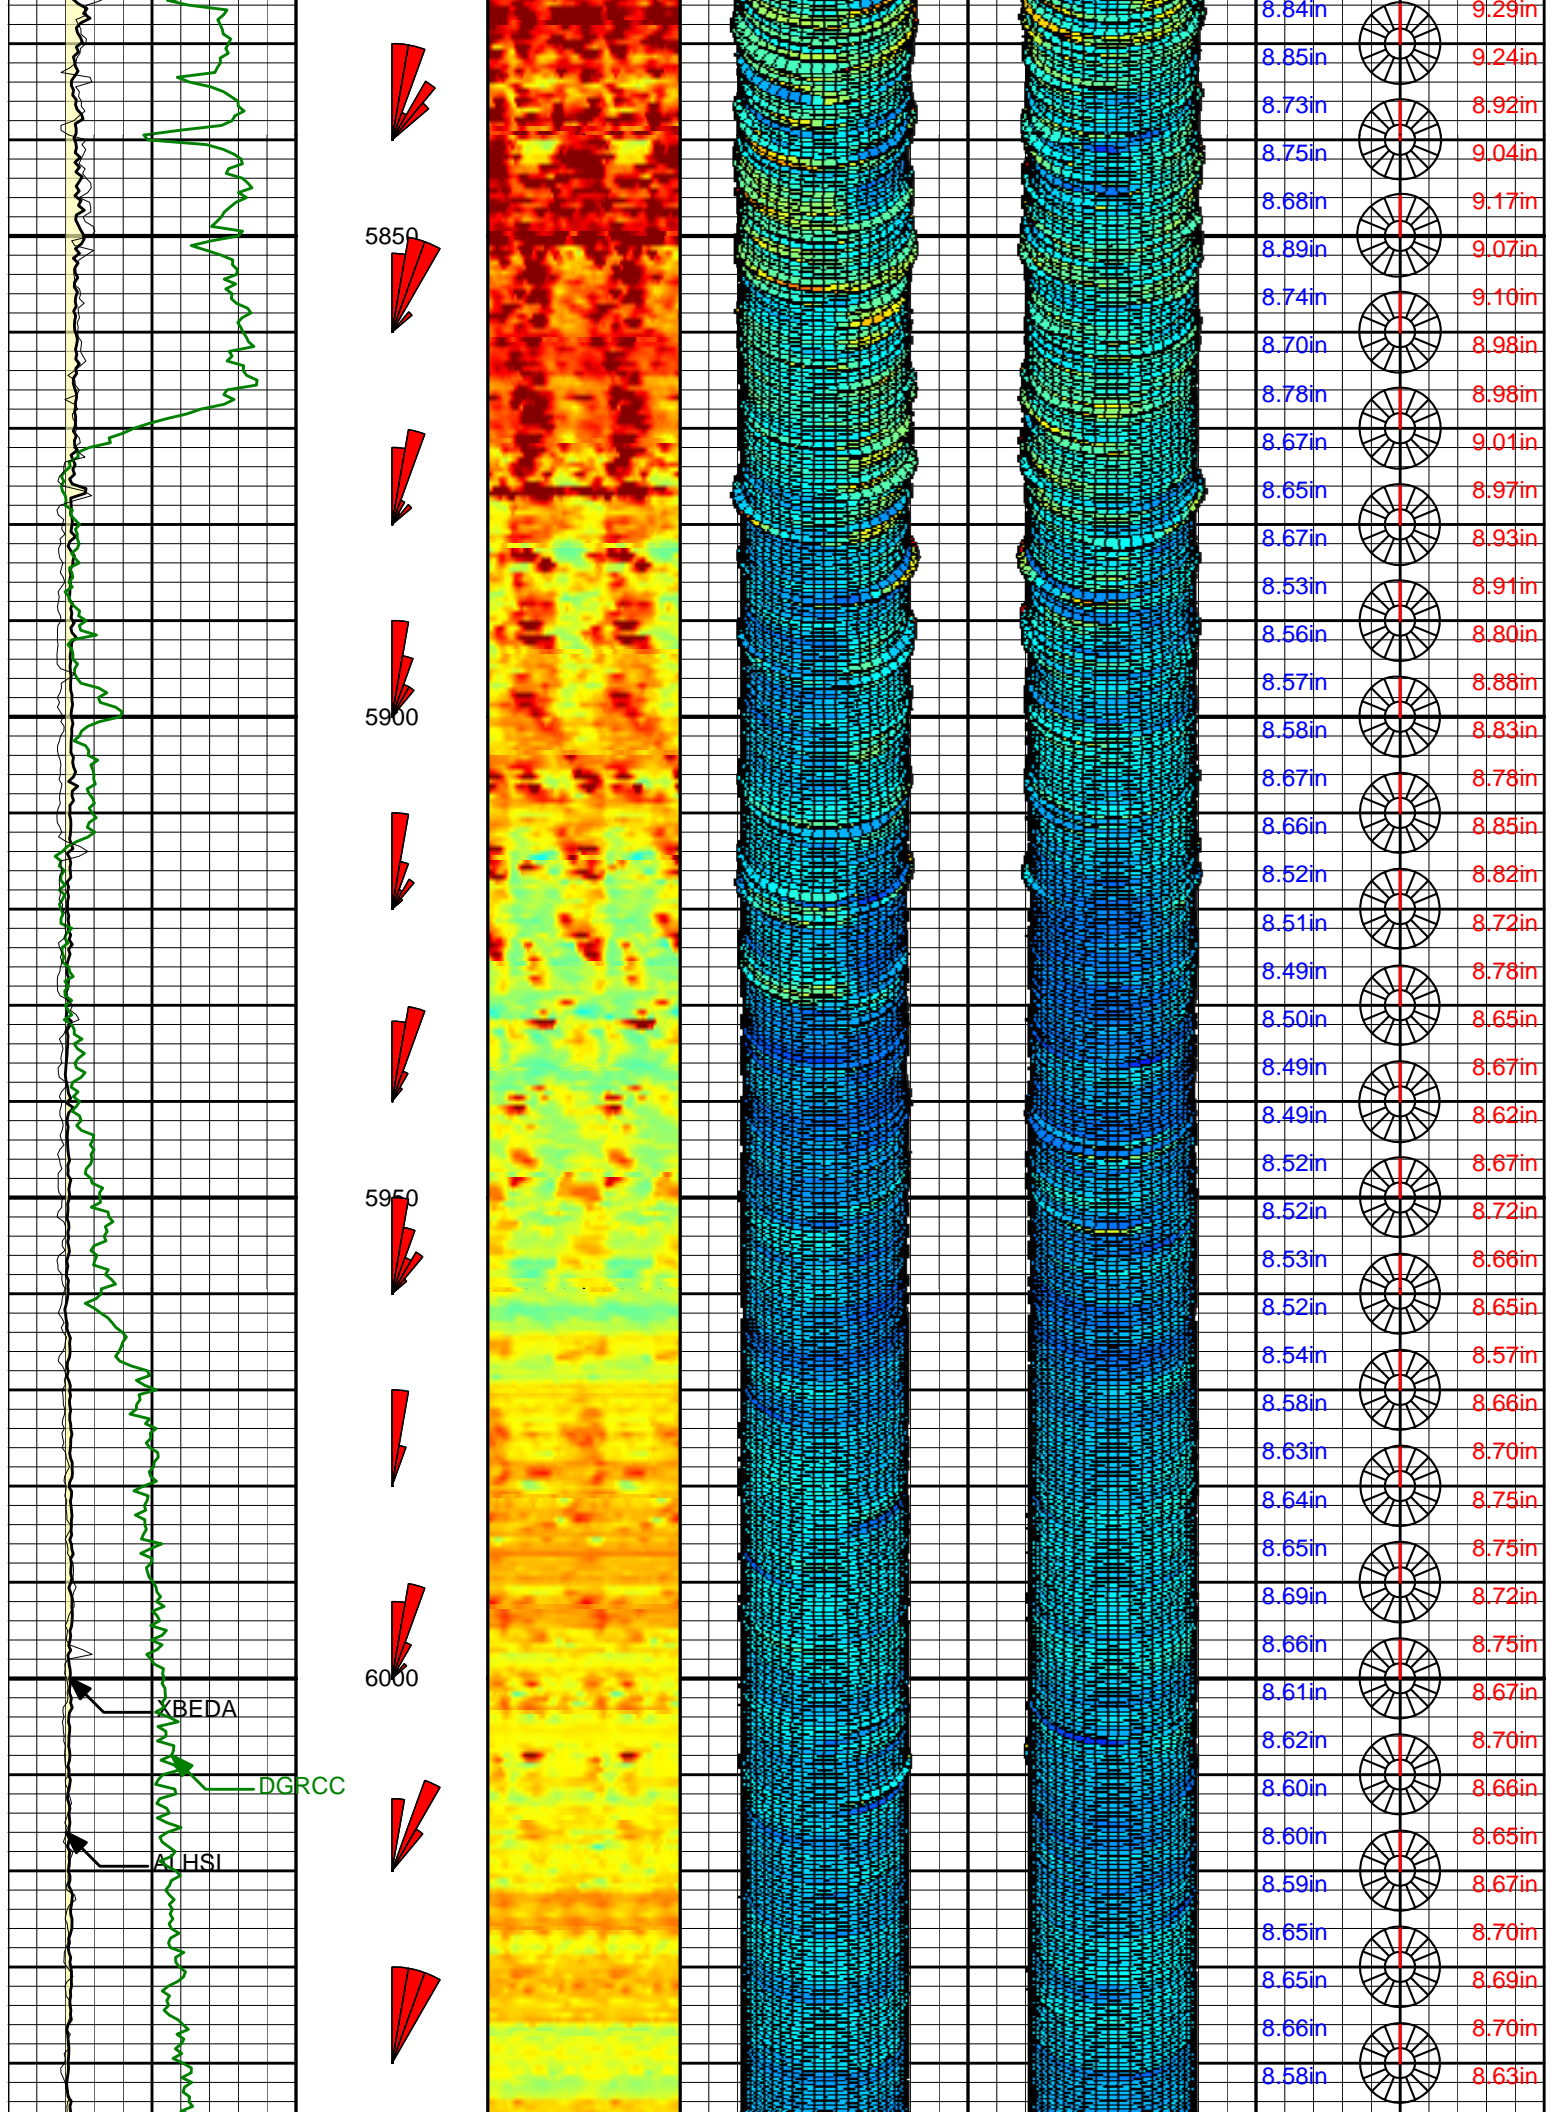

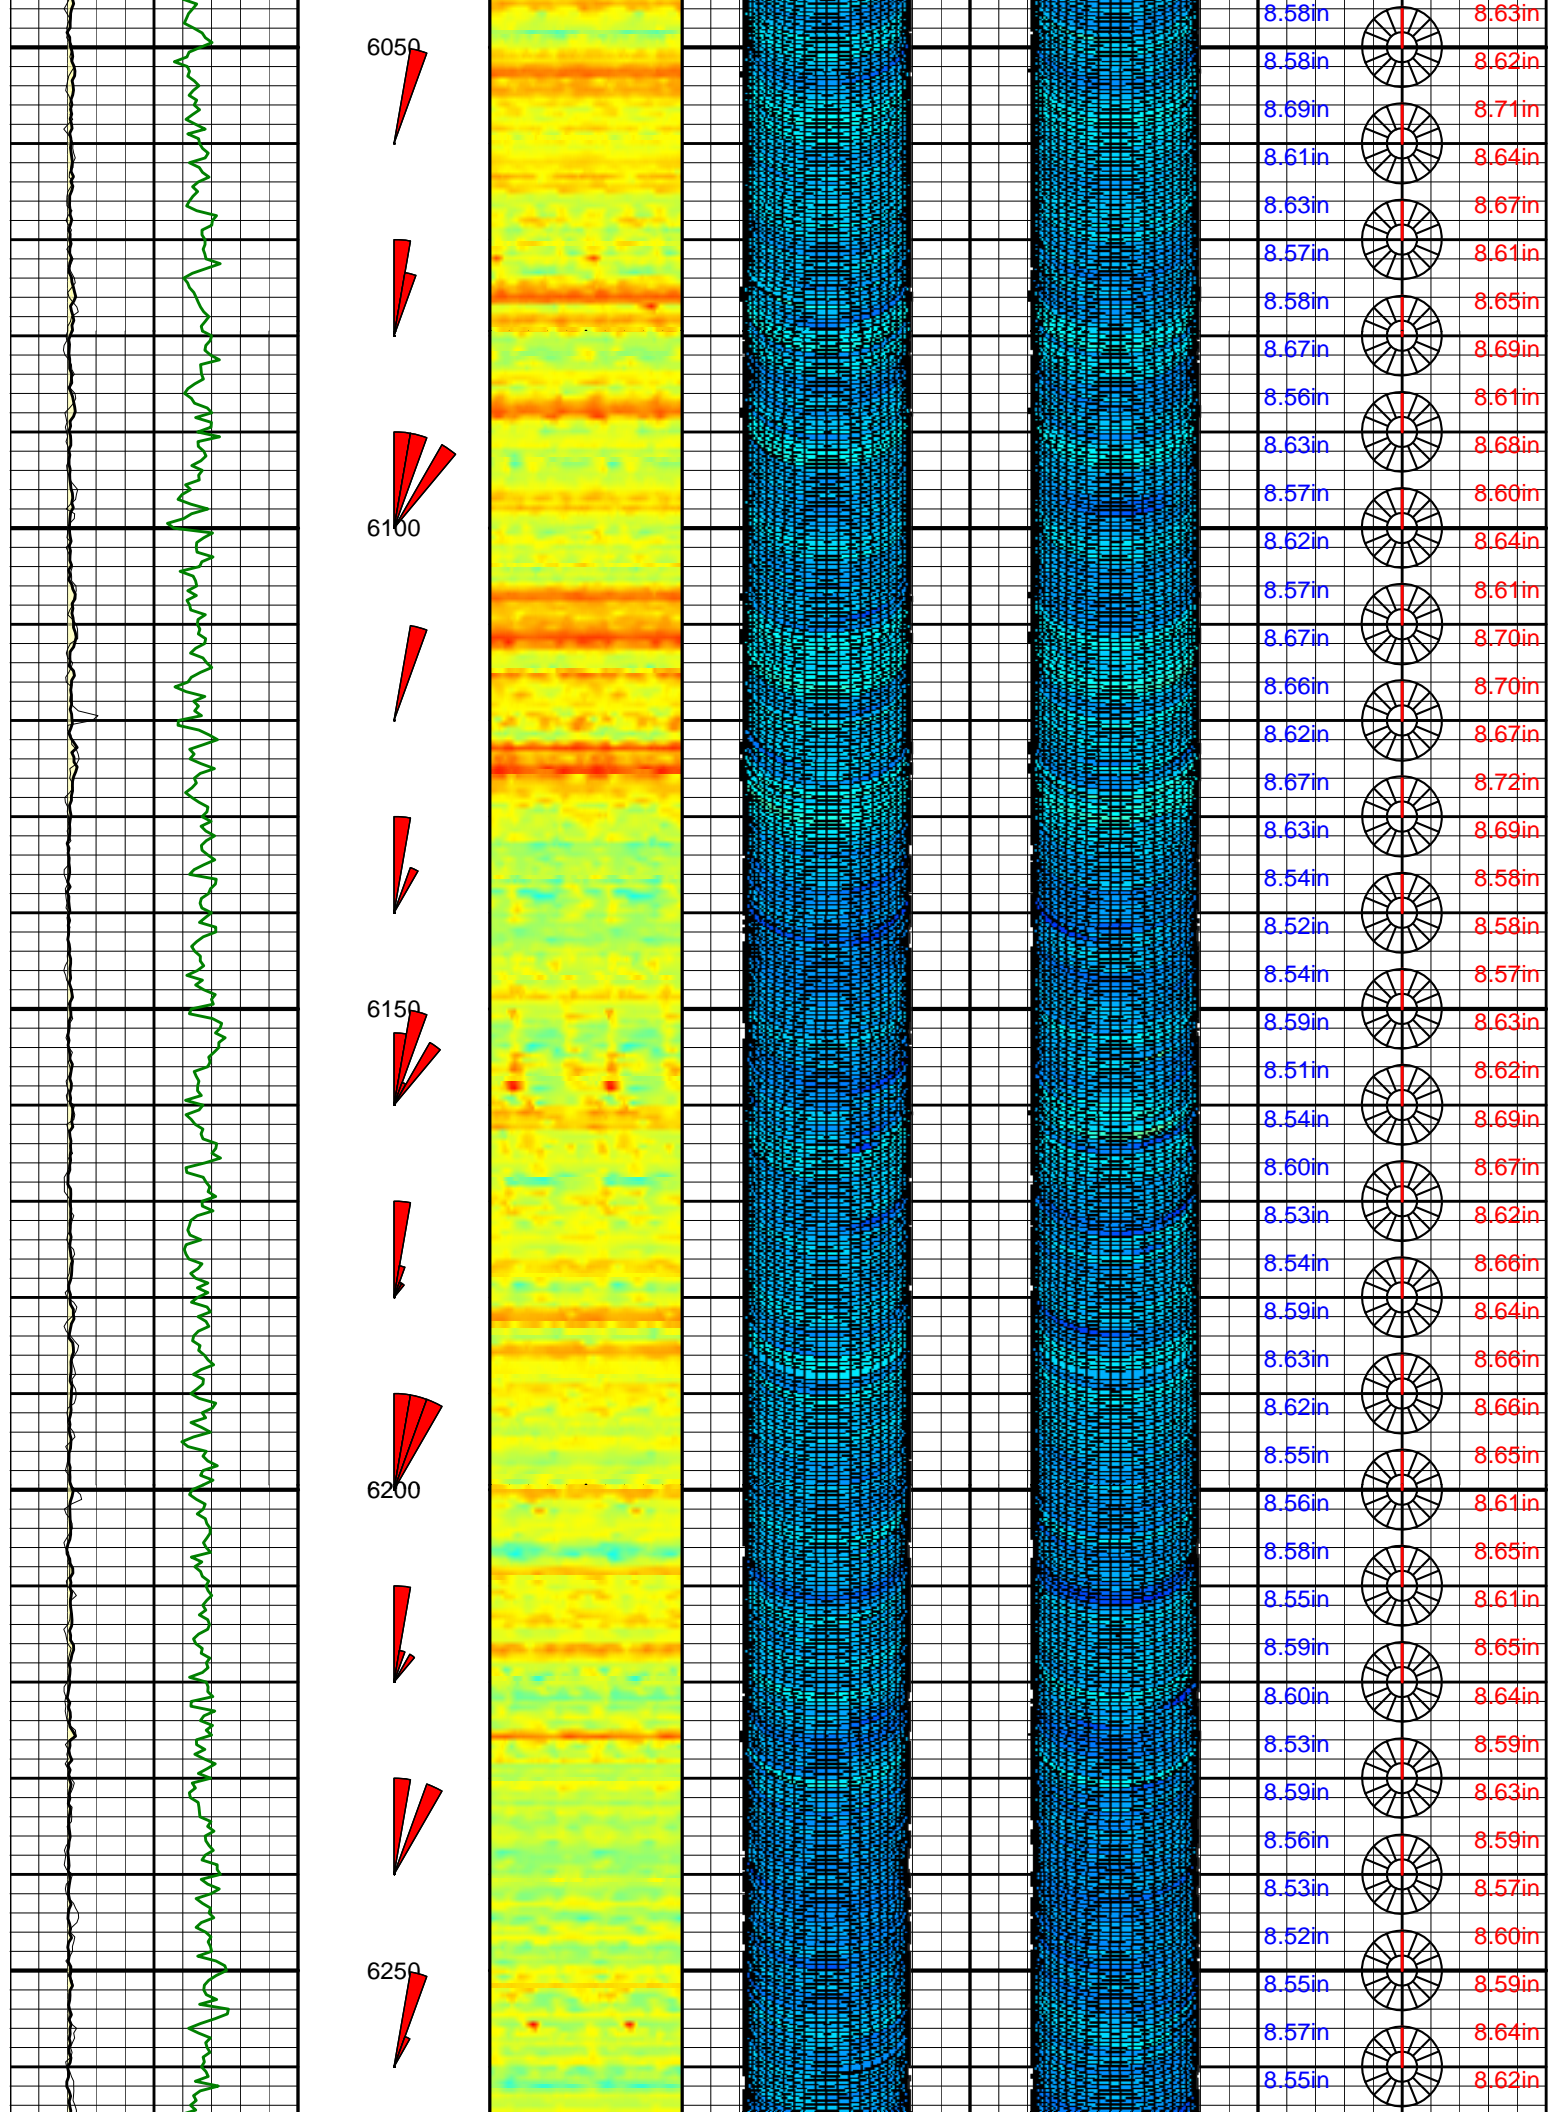

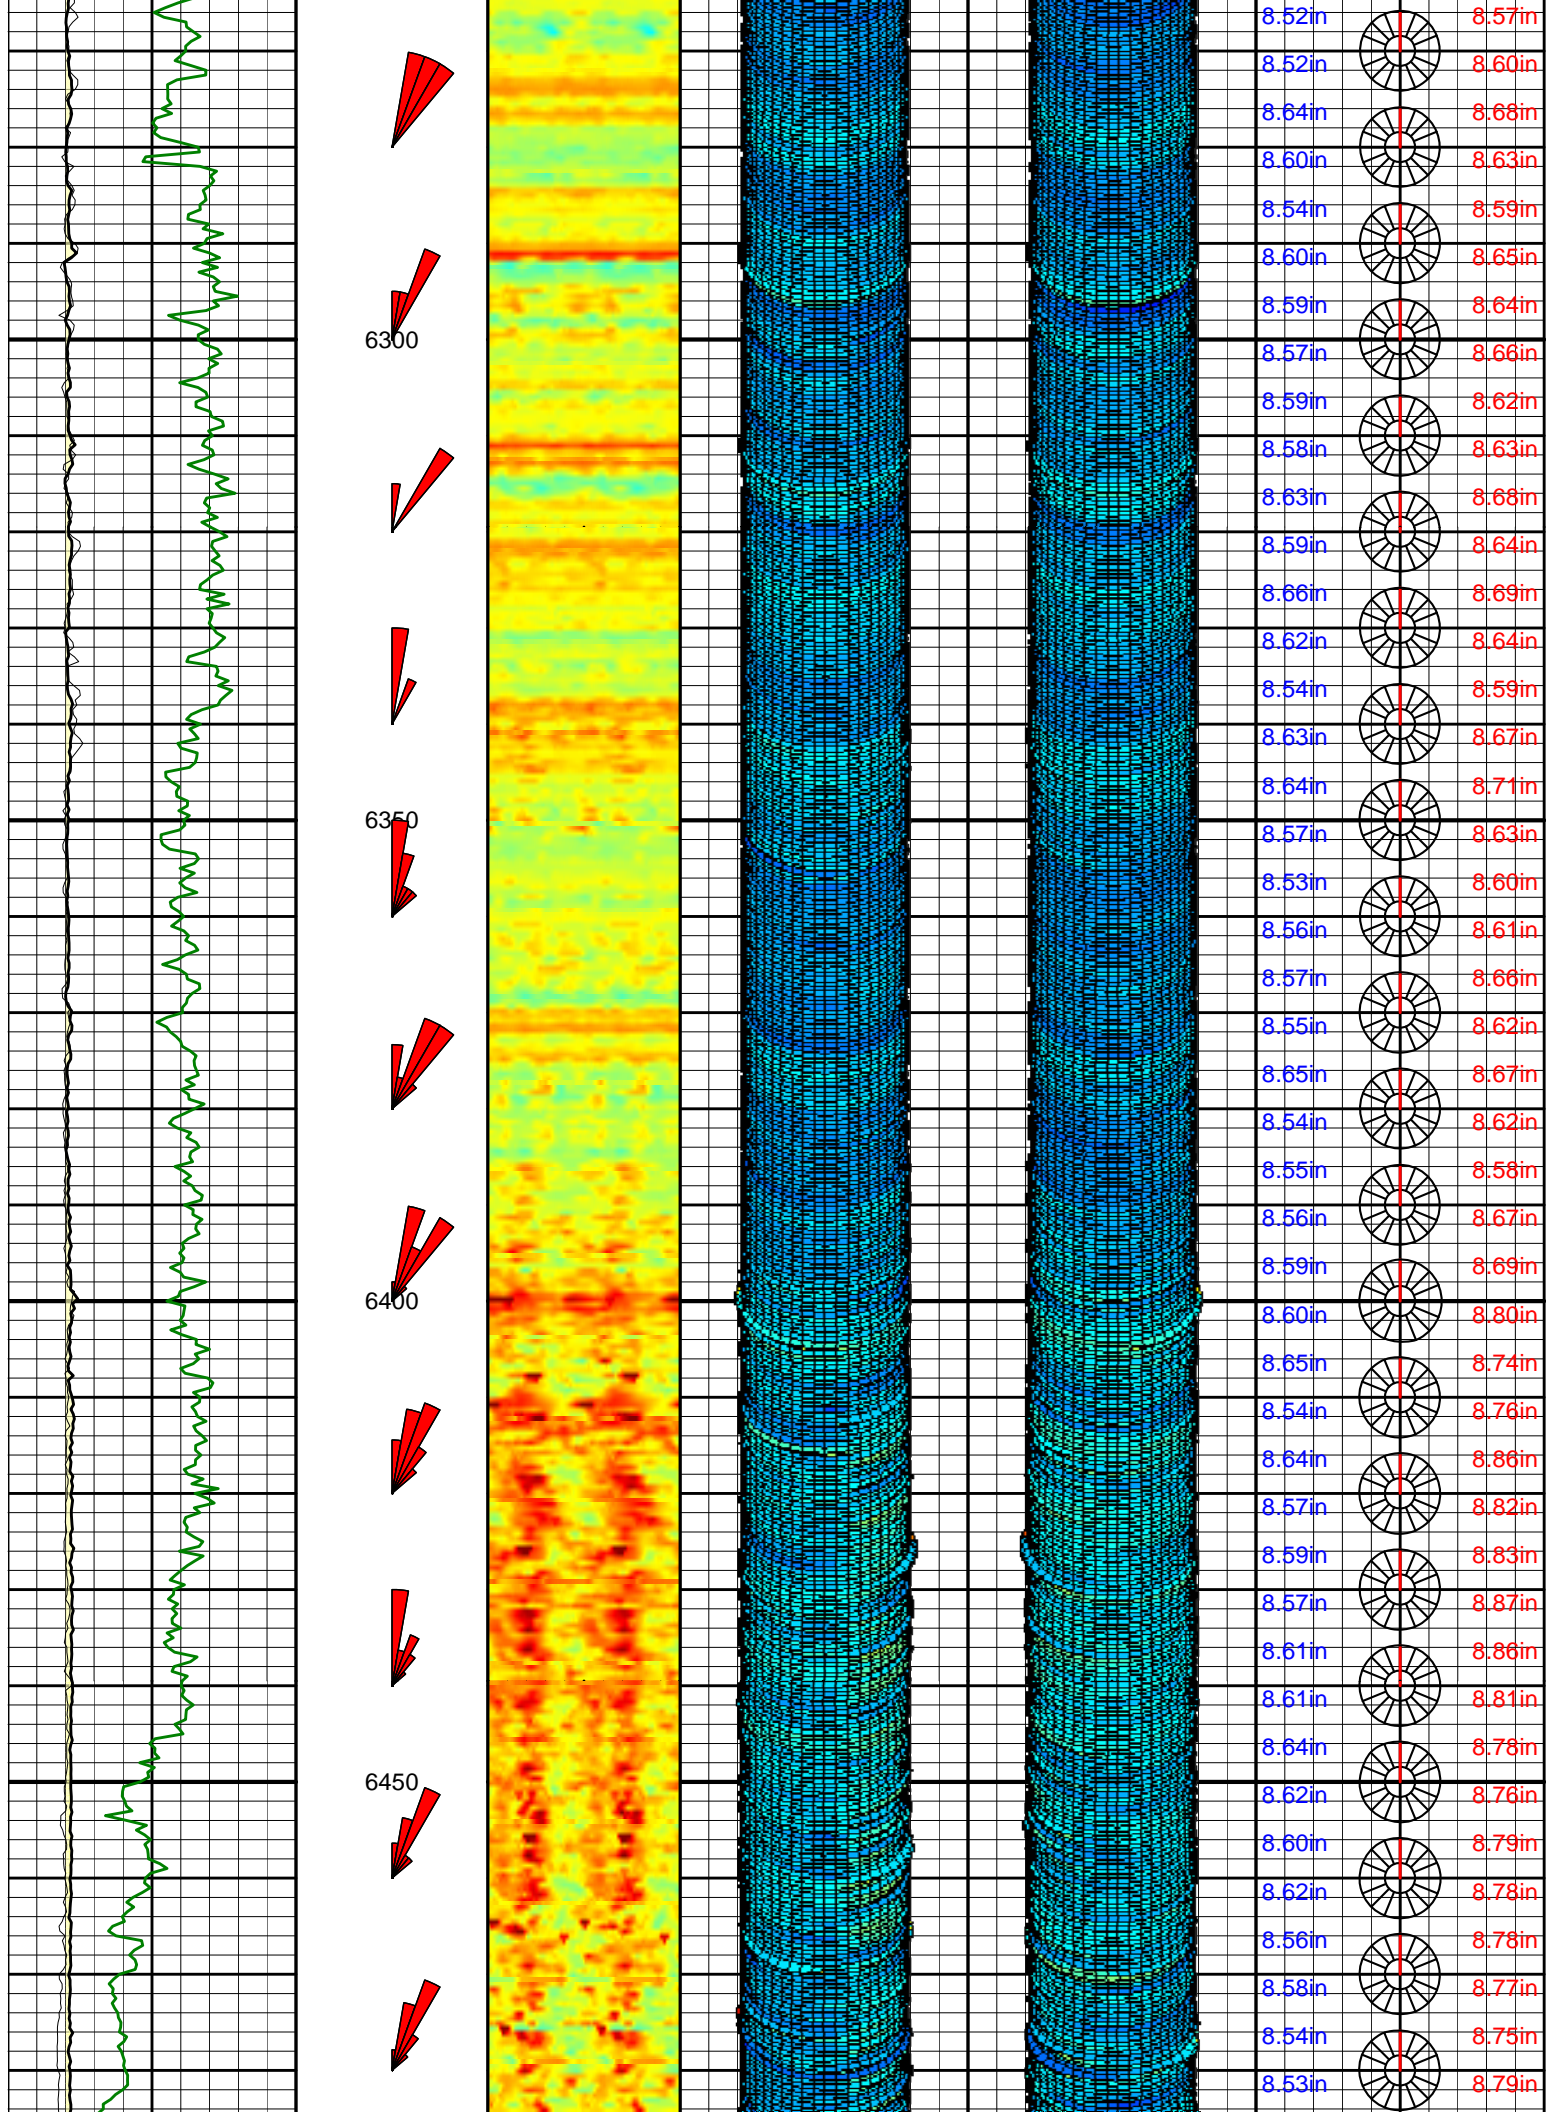

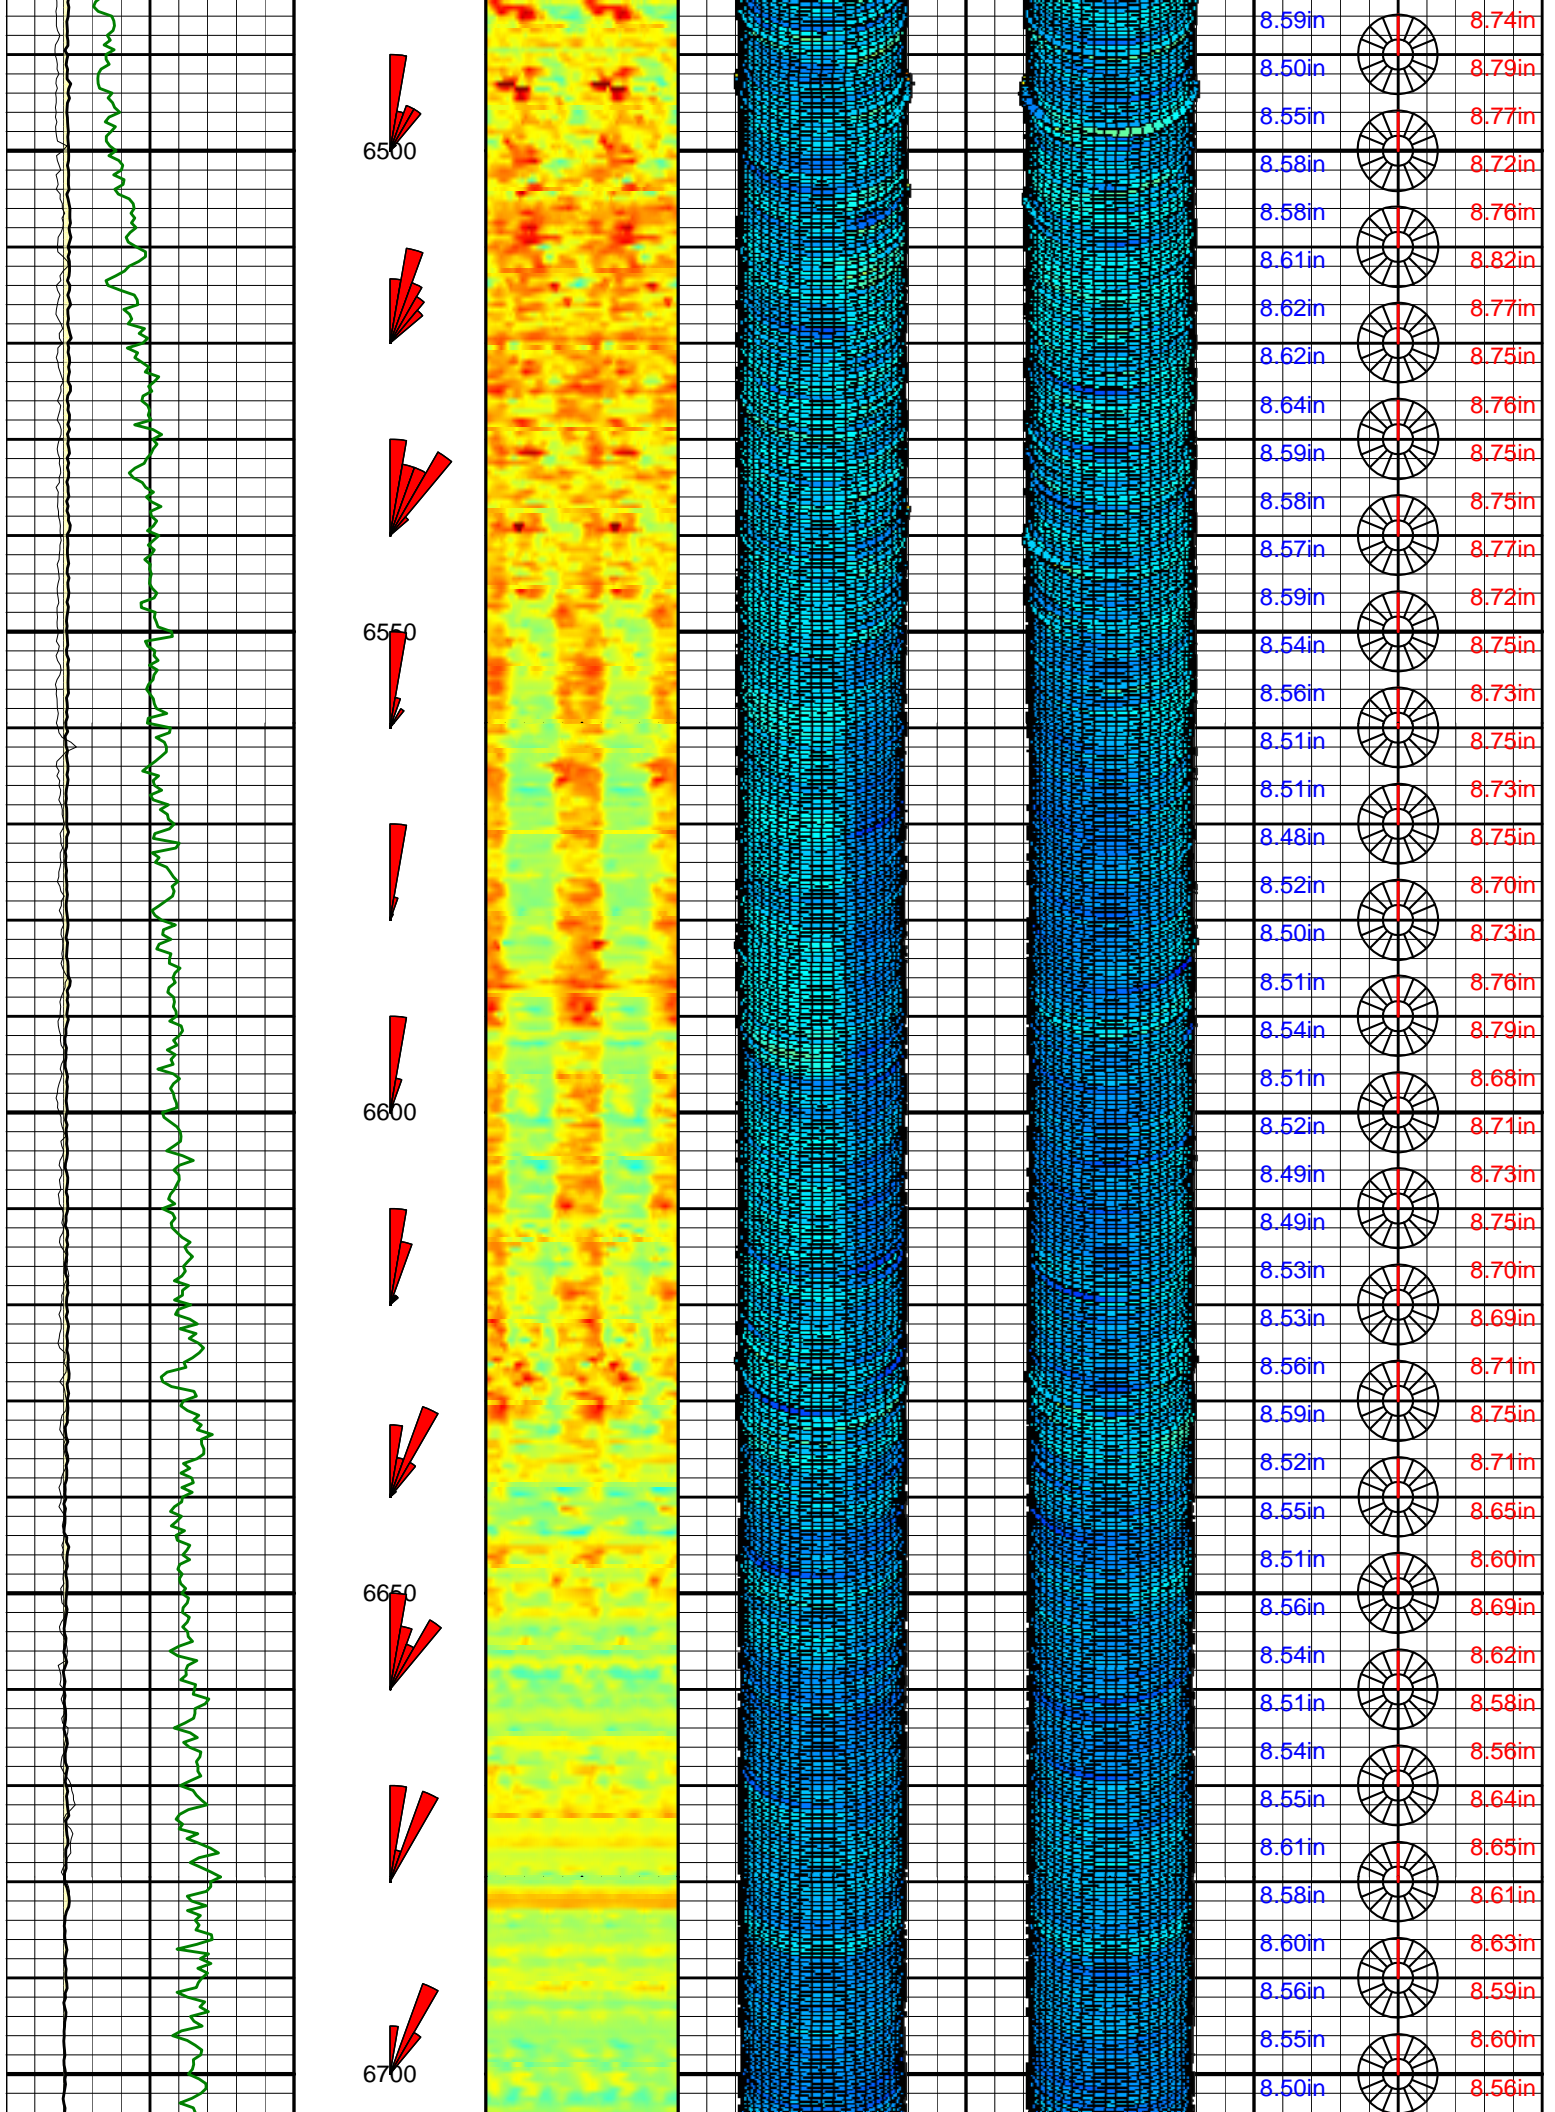

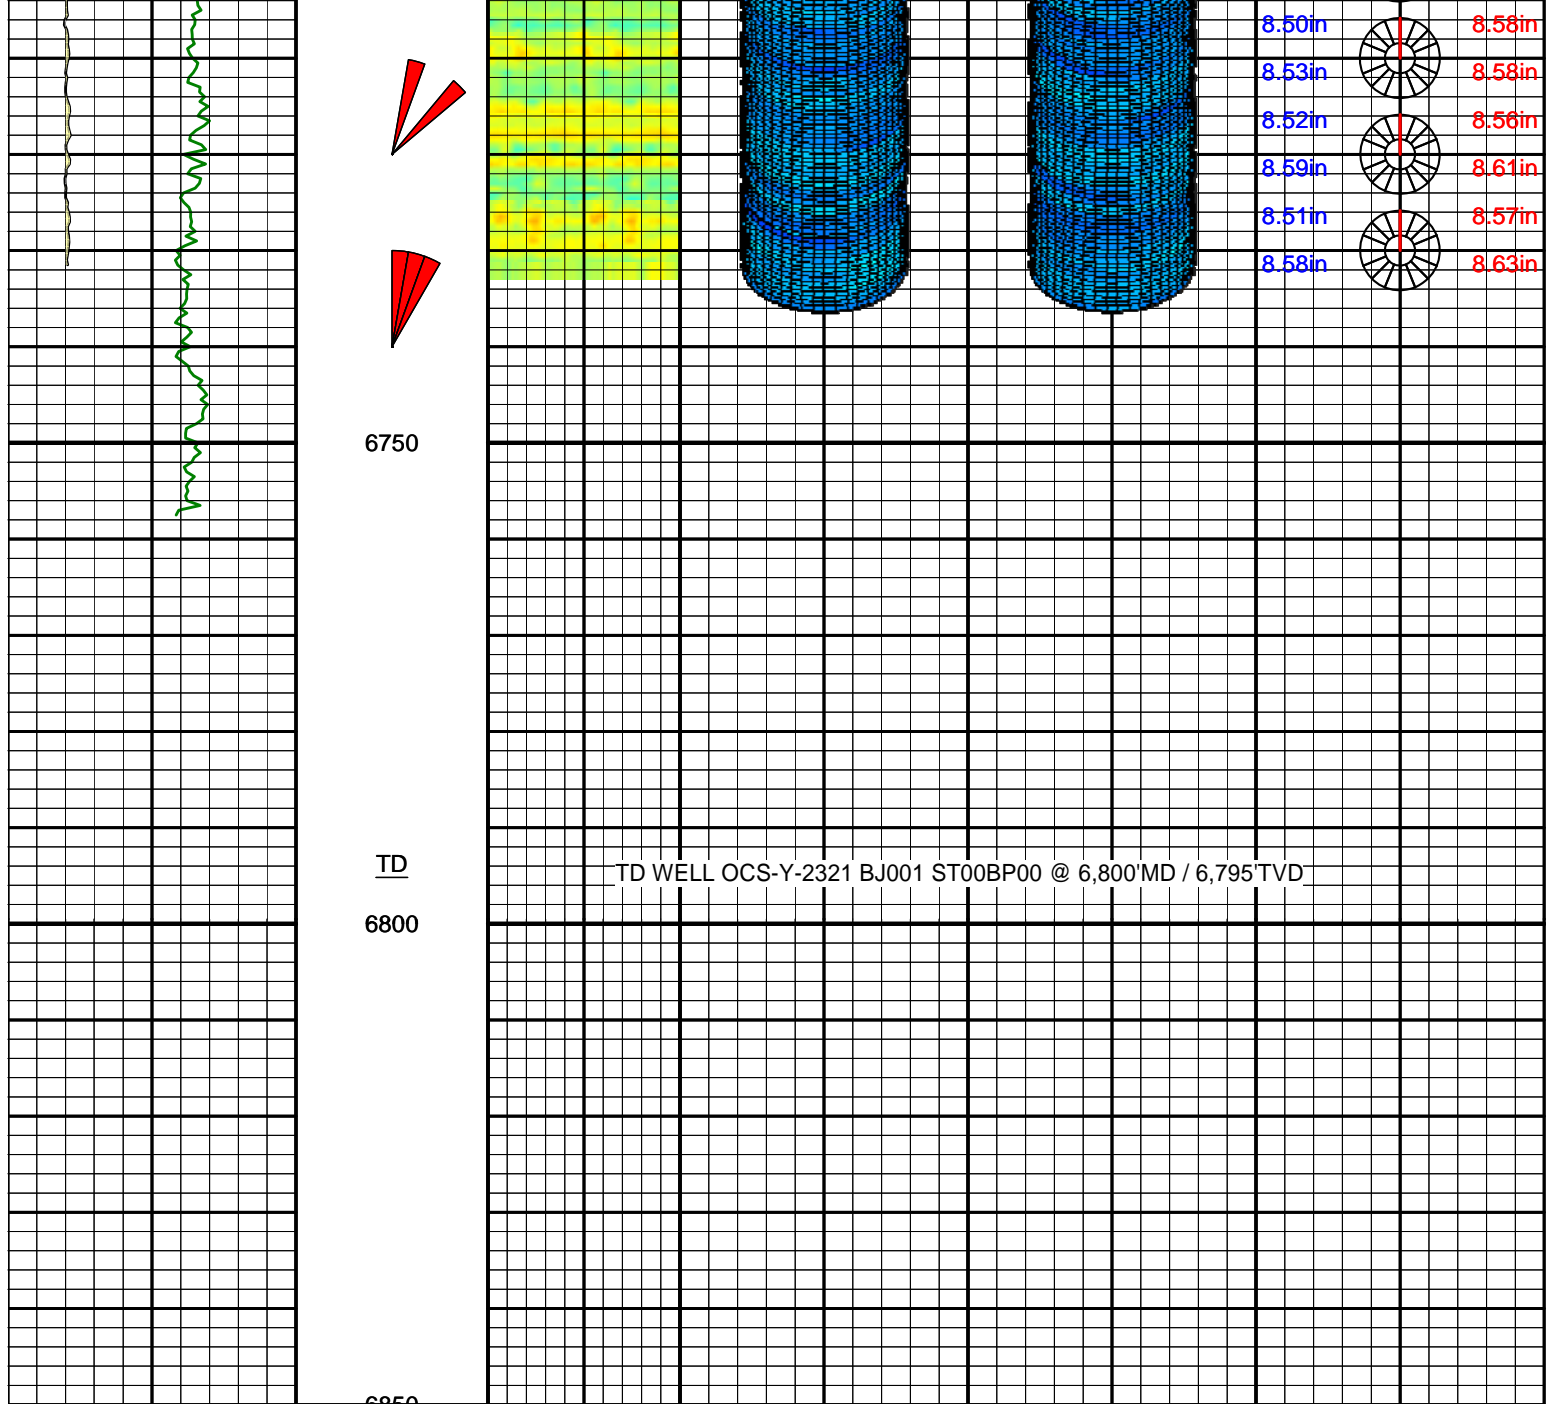

6750

TD

TD WELL OCS-Y-2321 BJ001 ST00BP00 @ 6,800' MD / 6,795' TVD

6800

6850

Hole Enlargement Under Minor Medium Severe <1" 1"-2" >2"		TVD ft 1 : 240	XCAL Image 4 Inches 4.5	XCAL 3D Plot Trace South 4 5	XCAL 3D Plot Trace North 4 5	XCAL Max Ellipse Diameter
ALD Hole Size Indicator inches 6.5 16.5			XCAL Ellipse Direction 	XCAL Min Ellipse Diameter		
DGR Comb Gamma Ray BC api 0 150						
XCAL Ellipse Avg Diameter inches 6.5 16.5						

DIRECTIONAL SURVEY REPORT

Shell Gulf of Mexico Inc.
 OCS-Y-2321 BJ001 ST00BP00
 Posey 6912
 Alaska
 USA
 AK-XX-0901604700
 Final Survey is projected to well TD

<i>Measured Depth (feet)</i>	<i>Inclination (degrees)</i>	<i>Direction (degrees)</i>	<i>Vertical Depth (feet)</i>	<i>Latitude (feet)</i>	<i>Departure (feet)</i>	<i>Vertical Section (feet)</i>	<i>Dogleg (deg/100ft)</i>
0.00	0.00	0.00	0.00	0.00 N	0.00 E	0.00	TIE-IN
220.00	0.00	0.00	220.00	0.00 N	0.00 E	0.00	0.00
320.88	0.51	129.60	320.88	0.29 S	0.35 E	-0.29	0.50
406.77	0.31	89.93	406.76	0.53 S	0.88 E	-0.53	0.39
495.25	0.99	122.22	495.24	0.93 S	1.76 E	-0.93	0.84
590.43	0.31	82.72	590.41	1.34 S	2.71 E	-1.34	0.81
684.05	0.64	327.24	684.03	0.87 S	2.68 E	-0.87	0.88
866.10	0.28	101.20	866.08	0.09 S	2.55 E	-0.09	0.47
957.99	0.00	269.46	957.97	0.13 S	2.77 E	-0.13	0.30
1051.65	0.14	176.72	1051.63	0.24 S	2.78 E	-0.24	0.15
1144.54	0.26	120.65	1144.52	0.46 S	2.97 E	-0.46	0.23
1235.66	0.41	134.11	1235.63	0.80 S	3.38 E	-0.80	0.19
1328.60	0.51	59.75	1328.58	0.83 S	3.98 E	-0.83	0.61
1378.50	0.25	111.62	1378.48	0.76 S	4.27 E	-0.76	0.81
1540.18	0.12	50.83	1540.15	0.78 S	4.74 E	-0.78	0.14
1723.74	0.39	34.99	1723.71	0.14 S	5.26 E	-0.14	0.15
1818.58	0.58	50.01	1818.55	0.43 N	5.81 E	0.43	0.24
2003.18	1.06	39.81	2003.12	2.35 N	7.62 E	2.35	0.27
2095.93	0.87	35.51	2095.87	3.57 N	8.57 E	3.57	0.22
2186.15	0.69	72.12	2186.07	4.30 N	9.49 E	4.30	0.57
2373.34	0.75	76.36	2373.25	4.93 N	11.76 E	4.93	0.04
2463.93	0.78	75.65	2463.83	5.23 N	12.93 E	5.23	0.03
2555.30	0.79	70.25	2555.19	5.59 N	14.13 E	5.59	0.08
2646.22	0.79	76.51	2646.11	5.95 N	15.33 E	5.95	0.10
2743.03	0.70	74.08	2742.91	6.27 N	16.55 E	6.27	0.10
2837.42	0.74	67.59	2837.29	6.66 N	17.68 E	6.66	0.10
2875.38	0.64	69.95	2875.25	6.83 N	18.10 E	6.83	0.27
2978.31	0.74	64.69	2978.17	7.31 N	19.25 E	7.31	0.11
3074.55	0.58	52.33	3074.40	7.88 N	20.20 E	7.88	0.22
3169.04	0.67	47.05	3168.89	8.55 N	20.99 E	8.55	0.11
3258.93	0.77	27.36	3258.77	9.44 N	21.65 E	9.44	0.30
3351.80	0.94	33.05	3351.63	10.64 N	22.35 E	10.64	0.21
3445.40	0.89	33.34	3445.22	11.90 N	23.18 E	11.90	0.06
3537.90	0.88	39.68	3537.71	13.05 N	24.03 E	13.05	0.11
3630.29	0.86	29.57	3630.09	14.20 N	24.82 E	14.20	0.17
3724.13	1.05	46.97	3723.91	15.40 N	25.80 E	15.40	0.37
3815.47	1.16	37.46	3815.23	16.71 N	26.98 E	16.71	0.24
3909.95	1.11	27.77	3909.70	18.28 N	27.99 E	18.28	0.21
4001.96	1.54	18.87	4001.69	20.24 N	28.80 E	20.24	0.52
4095.18	1.55	21.22	4094.87	22.60 N	29.67 E	22.60	0.07
4189.17	1.52	19.27	4188.83	24.97 N	30.54 E	24.97	0.06
4280.67	1.73	13.84	4280.29	27.46 N	31.27 E	27.46	0.28
4373.26	2.11	22.24	4372.83	30.39 N	32.25 E	30.39	0.51
4465.71	1.69	19.56	4465.23	33.26 N	33.35 E	33.26	0.46
4559.04	2.02	19.56	4558.51	36.11 N	34.37 E	36.11	0.35
4651.17	2.19	23.91	4650.58	39.24 N	35.62 E	39.24	0.25
4743.27	2.64	25.07	4742.59	42.77 N	37.23 E	42.77	0.49
4836.87	3.09	32.03	4836.08	46.87 N	39.49 E	46.87	0.61
4929.20	3.15	34.87	4928.26	51.06 N	42.26 E	51.06	0.18
5021.52	3.28	37.85	5020.45	55.22 N	45.33 E	55.22	0.23
5113.59	3.34	39.69	5112.36	59.37 N	48.66 E	59.37	0.13
5206.14	3.59	47.76	5204.74	63.39 N	52.52 E	63.39	0.59
5299.05	3.70	48.27	5297.46	67.34 N	56.92 E	67.34	0.12
5364.19	3.45	52.11	5362.48	69.95 N	60.04 E	69.95	0.54
5429.81	3.65	46.91	5427.97	72.59 N	63.12 E	72.59	0.58
5518.31	3.73	45.18	5516.29	76.55 N	67.22 E	76.55	0.15
5612.70	3.58	42.26	5610.48	80.90 N	71.39 E	80.90	0.25
5704.09	3.56	42.97	5701.70	85.09 N	75.24 E	85.09	0.06
5795.19	3.47	41.51	5792.62	89.22 N	79.00 E	89.22	0.13

5889.32	3.48	42.48	5886.58	93.46 N	82.82 E	93.46	0.06
5980.70	3.42	42.67	5977.80	97.52 N	86.54 E	97.52	0.07
6075.07	3.43	41.69	6072.00	101.69 N	90.33 E	101.69	0.06
6167.81	3.55	39.12	6164.57	105.99 N	93.98 E	105.99	0.21
6259.59	3.53	39.52	6256.17	110.37 N	97.57 E	110.37	0.03
6346.61	3.75	37.26	6343.02	114.70 N	100.99 E	114.70	0.30
6445.34	3.99	34.54	6441.52	120.10 N	104.89 E	120.10	0.31
6536.48	3.96	35.37	6532.44	125.27 N	108.51 E	125.27	0.07
6628.63	3.92	37.01	6624.37	130.38 N	112.25 E	130.38	0.13
6721.62	3.89	35.41	6717.15	135.49 N	115.99 E	135.49	0.12
6745.05	3.99	35.86	6740.52	136.80 N	116.93 E	136.80	0.46
6800.00	3.99	35.86	6795.34	139.90 N	119.17 E	139.90	0.00

CALCULATION BASED ON MINIMUM CURVATURE METHOD

**SURVEY COORDINATES RELATIVE TO WELL SYSTEM REFERENCE POINT
TVD VALUES GIVEN RELATIVE TO DRILLING MEASUREMENT POINT**

**VERTICAL SECTION RELATIVE TO WELL HEAD
VERTICAL SECTION IS COMPUTED ALONG A DIRECTION OF 0.00 DEGREES (GRID)
A TOTAL CORRECTION OF 10.95 DEG FROM MAGNETIC NORTH TO GRID NORTH HAS BEEN APPLIED**

**HORIZONTAL DISPLACEMENT IS RELATIVE TO THE WELL HEAD.
HORIZONTAL DISPLACEMENT(CLOSURE) AT 6800.00 FEET
IS 183.78 FEET ALONG 40.42 DEGREES (GRID)**

**Map System: NAD 83 UTM Zones
Geo Datum: North American Datum of 1983
Map Zone: Universal Transverse Mercator Zone 03N**