



Shell Exploration & Production

David Moore
Oil Spill Response Division Supervisor
Bureau of Safety and Environmental Enforcement
Alaska OCS Region
381 Elden Street
Herndon, VA 20170

Shell
3601 C Street, Suite 1000
Anchorage, AK 99503
Tel. (907) 646-7112
Email Susan.Childs@Shell.com
Internet <http://www.Shell.com/>

December 18, 2013

Re: Shell Chukchi Sea Regional Exploration Program Oil Spill Response Plan, Revision 2

Dear Mr. Moore:

Please find enclosed, for Bureau of Safety and Environmental Enforcement (BSEE) review, Shell Gulf of Mexico, Inc.'s (Shell) Revision 2 of the *Chukchi Sea Regional Exploration Program Oil Spill Response Plan* (OSRP), originally dated May 2011. Consistent with the requirements of 30 CFR 254.30(a), this submittal presents the findings from Shell's biennial review. The updates to the OSRP ensure both continued compliance with applicable statutory and regulatory requirements, and provide our Incident Management Team (IMT) the most current information to achieve an efficient, coordinated, and effective response in the unlikely event of a spill.

As a result of Shell's biennial review, the currently approved OSRP has been revised to provide necessary administrative updates, including, but not limited to, Shell's IMT roster and associated contact information (reflecting personnel changes). OSRP updates also reflect the growth of our existing response contractors and consideration of the need for flexibility during OCS operations for staging vessels based upon the response times previously described within the approved OSRP. The updates incorporated into the OSRP Revision 2, dated December 2013, do not diminish Shell's preparedness and response capability and are aligned with the currently approved OSRP.

Shell's biennial review has been completed in manner consistent with the requirements of 30 CFR 254.30. To facilitate BSEE review of our submittal, a redlined version is provided along with the attached table, *Chukchi Sea Regional Exploration Program OSRP Revision 2 Change Log*, which further details the substance of the OSRP revisions. Shell remains committed to maintaining the integrity of its response planning program and looks forward to working with BSEE to incorporate these administrative changes into the OSRP. Should you have any questions regarding the update to this OSRP or any other aspect of Shell's operations, please do not hesitate to contact me at (907) 646-7112 or at Susan.Childs@Shell.com, or Curtis Wright at (907) 771-7234 or at Curtis.Wright@Shell.com.

Thank you.

A handwritten signature in blue ink that reads "Susan Childs".

Susan Childs
Alaska Venture Support Integrator, Manager

Bureau of Safety & Environmental Enforcement
Shell Chukchi Sea Regional Exploration Program OSRP, Revision 2
December 18, 2013
Page 2 of 2

Cc:

Christy Bohl, Regional Administrator
Alaska Region Oil Spill Response Division
Bureau of Safety and Environmental Enforcement

Attachments:

Chukchi Sea Regional Exploration Program Revision 2 Change Log
Chukchi Sea Regional Exploration Program OSRP – Revision 2, red-line
Chukchi Sea Regional Exploration Program OSRP – Revision 2, final

**CHUKCHI SEA
REGIONAL EXPLORATION PROGRAM
OIL SPILL RESPONSE PLAN**

**SHELL
ANCHORAGE, ALASKA**



DECEMBER 2013

REVISION 2

HSE Policy

SHELL COMMITMENT AND POLICY ON HEALTH, SECURITY, SAFETY, THE ENVIRONMENT AND SOCIAL PERFORMANCE

COMMITMENT

In Shell we are all committed to:

- Pursue the goal of no harm to people;
- Protect the environment;
- Use material and energy efficiently to provide our products and services;
- Respect our neighbours and contribute to the societies in which we operate;
- Develop energy resources, products and services consistent with these aims;
- Publicly report on our performance;
- Play a leading role in promoting best practice in our industries;
- Manage HSSE & SP matters as any other critical business activity; and
- Promote a culture in which all Shell employees share this commitment.

In this way we aim to have an HSSE & SP performance we can be proud of, to earn the confidence of customers, shareholders and society at large, to be a good neighbour and to contribute to sustainable development.

POLICY

Every Shell Company:

- Has a systematic approach to HSSE & SP management designed to ensure compliance with the law and to achieve continuous performance improvement;
- Sets targets for improvement and measures, appraises and reports performance;
- Requires contractors to manage HSSE & SP in line with this policy;
- Requires joint ventures under its operational control to apply this policy, and uses its influence to promote it in its other ventures;
- Engages effectively with neighbours and impacted communities; and
- Includes HSSE & SP performance in the appraisal of staff and rewards accordingly.

Peter Voser
Chief Executive Officer



Peter Slaiby
Vice President Alaska Exploration and Appraisal



Originally published in March 1997 and updated by the Executive Committee December 2009.

General Disclaimer: The companies in which Royal Dutch Shell plc directly and indirectly owns investments are separate entities. In this Policy the expression "Shell" is sometimes used for convenience where references are made to companies within the Shell group or to the group in general. Likewise, the words "we", "us" and "our" are also used to refer to Shell companies in general or those who work for them. These expressions are also used where no useful purpose is served by identifying specific companies.



CHUKCHI SEA REGIONAL EXPLORATION PROGRAM REVISION 2 CHANGE LOG

2013 Biennial Review [30 CFR 254.30(a)]



PART OR APPENDIX	SECTION, FIGURE, OR TABLE	PAGE (S)	CONTEXT
Quick Guide	Figure 1	4	Updated agency contact numbers on page 2 of the First Notice Incidental Detail Report
	Figure 3a	6	Current Emergency Contact List - Consistent with Table 2.7.1-4
	Figure 3b	7	Updated Agency and External Notification Information and Contacts
	Figure 3c	8	Current Command Staff Contact Information - Consistent with Table 2.2-1
	Figure 4b	13	Chart update for consistency with Shell's ICS Organization
Part 1	Section 1	1-1 and 1-2	OSRP Introduction update Provision for alignment of OSRP with current EP for Chukchi Sea Operations OSRP Objective update
	Contract Certification Statement	1-3	Shell contracted OSRO and Primary Response Action Contractor (PRAC) update
	Section 1.1.1	1-4	Burger A location correction
	Section 1.1.2	1-13 through 1-15	Editorial update Edit to provide flexibility of response vessel staging in accordance with response time frames within approved OSRP Removal of Chukchi Sea and Beaufort Sea comparison
	Section 1.2	1-21	Record of revision description
	Section 1.3	1-22	Established Shell processes for OSRP updates for incorporation of lessons learned and provision of regulatory compliance
	Table 1.4-1	1-24 through 1-31	Acronym and Abbreviation updates
Part 2	Section 2.1	2-1	Current IC / OI personnel and contact information
	Section 2.2	2-2	Incorpoated automated notification method for Shell IMT personnel
	Figure 2.2-1	2-3	Updated Tier II / III Organization Chart and reference to applicable descriptions for functional roles
	Table 2.2-1	2-4 and 2-5	Current IMT Contact Information
	Table 2.2-2	2-7 and 2-8	IMT Responsibilities / checklist reorganized and aligned with Shell's ICS Structure Changes reflect: Section Chief actions and inclusion of Legal Officer actions, Finance Section Chief editorial change, Wildlife and Source Control functions incorporated under Operations Section
	Section 2.3.2	2-9	Current Alternate Spill Response Coordinator and contact information Current Shell contracted OSROs and response contractors (ARS)
	Section 2.4.1	2-10	Updated location descriptions for Command Post providing for flexibility to move IMT to larger facility, clarification for forward command post options
	Section 2.4.2	2-12	Edit to describe established communication system
	Section 2.4.3	2-12	Editorial change clarifying OSRO role with respect to Shell
	Section 2.6.2	2-17	Alignment of Source Control under Operations Section
	Section 2.7	2-19	Identification of Shell's response resources: North Slope OSRO (ACS) and contracted response organizations AES-RO and ARS, corrected link
	Section 2.7.1	2-20	Additional direction for internal reporting needs and editorial change
	Section 2.7.1	2-20 and 2-21	Formatting change - Table 2.7.1-1 moved to Page 2-20 (Change accepted)
	Table 2.7.1-3	2-22	Updated notification and actions for Tier II / III spill response, inclusion of Legal Officer
	Figure 2.7.1-1	2-23	Notification diagram update
	Table 2.7.1-4	2-24	Contractor update listing current OSRO and response contracts (ARS included) Table reformatted (table formatting changes not displayed)
	Table 2.7.1-5	2-25	Agency and External Notification Information updates
	Figure 2.7.1-2	2-27	Agency notification information updated on page 2 of the Shell Report Offshore Environmental Incident form
Table 2.7.1-6	2-29	Highlight modified in Table header to emphasize reporting time considerations	



CHUKCHI SEA REGIONAL EXPLORATION PROGRAM REVISION 2 CHANGE LOG
2013 Biennial Review [30 CFR 254.30(a)]

PART OR APPENDIX	SECTION, FIGURE, OR TABLE	PAGE (S)	CONTEXT
Part 2	Section 2.7.2	2-31	Response contract references to include ARS
	Table 2.7.3-3	2-38	Update to contact information for consultation list
	Section 2.7.4	2-40 through 2-42	Editorial changes inclusive of acronym correction, contractor update, and MMO title change to PSO
	Section 2.7.5	2-43 through 2-44	Addition of ARS as contracted response resource and editorial updates, MOSAG / SART reference has been changed throughout the plan to SART - no reduction in resources
	Section 2.7.6	2-45	Corrected regulatory citation in heading
	Section 2.7.7	2-46	Editorial changes, addition of ARS as contracted response resource
	Section 2.7.7	2-48 through 2-49	Addition of ARS as contracted response resource
	Section 2.7.9	2-56 and 2-57	Addition of ARS as contracted response resource, link updates
Appendix A	Section A.1	A-1	Shell contracted OSRO, Primary Response Action Contractor (PRAC) Contacts and Equipment Update
	Table A-1	A-1	Shell contracted OSRO and Primary Response Action Contractor (PRAC) Update
	Section A.1	A-2	Editorial correction to clarify staging of offshore equipment
	Table A-2	A-2 and A-3	Correction for nearshore response barge staging distances to align with timing constraints of the OSRP, Update to correct location and ownership of equipment assigned to TF-8
	Section A.3	A-18 and A-19	Rotary-wing equipment information and specifications update
	Table A-5	A-18	Rotary-wing aircraft description update
	Table A.7	A-24	Removal of Beaufort Staging reference
	Section A.5	A-25	Addition of ARS as contracted response resource
	Section A.5	A-26 through A-28	2013 3rd Quarter Auxiliary Contractor Response Team Report provided as an example
Section A.7	A-28	Shell, OSRO, and PRAC equipment inspection and maintenance program descriptions	
Appendix B	Table B-1	B-1	Contractual agreement modification reflects the growth and restructure of UIC into the primary response action contractor - UIC Arctic Response Services
Appendix C	Table C-1	C-1	Distance correction
	Section C.2	C-2	Regulatory citation correction
	Section C.3	C-4 and C-5	Editorial updates to clarify Shell's role with respect to UC and OSRO; and to provide flexibility in vessel staging in accordance with response time frames established within the approved OSRP, converted all relative staging locations based upon time
	Section C.4	C-5 and C-6, C-11, and C-14	Editorial changes to <ul style="list-style-type: none"> Clarify that Shell, functioning as IC in the UC, tasks OSRO and response contractors Provide vessel staging flexibility in accordance with response time frames established within the approved OSRP Addition of ARS as response resource
	Table C-3	C-7 and C-8	Corrections to staging area location and response time frames established within the approved OSRP Update for response equipment locations and ownership
	Table C.4	C-16	Editorial change for footnote for inclusion of ARS staffing
	Table C.5	C-19, C-20, C-23 through C-25	Editorial changes to <ul style="list-style-type: none"> Clarify that Shell, functioning as IC in the +D40 UC, tasks OSRO and response contractors Provide vessel staging flexibility in accordance with response time frames established within the approved OSRP Addition of ARS as response resource

CHUKCHI SEA REGIONAL EXPLORATION PROGRAM REVISION 2 CHANGE LOG
2013 Biennial Review [30 CFR 254.30(a)]



PART OR APPENDIX	SECTION, FIGURE, OR TABLE	PAGE (S)	CONTEXT
Appendix D	Table D.2-1	D-2	MSRC Weblink update, staging location correction
	Section D.2	D-2	MSRC dispersant inventory summary location updated
	Section D.3	D-3	Weblink update
	Section D.4	D-3	Disperant monitoring contractor name change (OASIS Environmental Inc. acquired by ERM)
	Section D.6	D-7	Correction to distance from land to lease sale area
	Section D.7	D-8	Change to reflect pending revision of ARRT Guidelines within the Oil Dispersant Authorization Plan
	Section D.8	D-9	Response contractor change
Appendix E	Section E.3	E-4	Editorial changes and distance corrections
Appendix F	Section F.1	F-1	Update Shell's current training program description to be consistent with current practice and with OSHA provisions for oil spill response training
	Section F.2	F-1 through F-3	Editorial changes to clarify OSRO and response contractor training programs requirements for consistency with OSHA and Shell requirements, insert summary Table F-1 (all other Tables sequentially updated), Summarized the scope of Shell's OSR Training Academy
	Table F-1 (updated to F-2)	F-3	Updated contact for Shell training records by position
	Section F.3	F-3 through F-5, F-11	Edits made to reflect growth of Shell's contracted resources and location of the associated training records, Editorial changes to clarify description of summary for updated Table F-7 showing an example of MSRC Dispersant Aircraft Flight / Training
	Table F-2 (updated to F-3) and Table F-3 (updated to F-4)	F-4	Edits made to reflect growth of Shell's contracted resources and location of the associated training records, Telephone number updated in Table F-3
	Table F-4 (updated to F-5)	F-4	Clarification to table, training is scheduled by IMT position not employee, deleted individual identifiers in this table and added cross-reference to Table 2.2-1 eliminating redundancy and potential for error. Projected training provides for Spring training in 2014
	Table F-5 (Updated to F-6)	F-5	Spring training for identified staff is scheduled prior to drilling season. Clarification to table, training is scheduled by IMT position not employee, deleted individual identifiers in this table and added cross-reference to Table 2.2-1
	Table F-7 (updated to F-8)	F-11	Shell 2013 IMT Training Summarized
	Section F.5	F-12	Editorial correction for consistency with changes in Table F-8
	Section F.6	F-15 through F-18	New version of the NPREP Internal Exercise Documentation Form
Appendix G	Section G	G-1	MOSAG / SART reference has been changed throughout the plan to SART - no reduction in resources
	Out-of-Region Resources	G-2	Logistical Support Contractor information updated for contingency camp
	Table G-1	G-3 through G-5	Contractor contact information updated
	Figure G-2	G-8	Figure updated to provide for potential staging in Goodhope Bay
Appendix H	Section H.3	H-1 and H-2	Removal of Beaufort comparison reference, correction to lease sale distance to land
	Section H.5.1	H-6	Correction to distance from land to lease sale area
	Section H.8.2	H-11	Link update
	Section H.9	H-12	Removal of Beaufort comparison reference

CHUKCHI SEA REGIONAL EXPLORATION PROGRAM REVISION 2 CHANGE LOG
2013 Biennial Review [30 CFR 254.30(a)]



PART OR APPENDIX	SECTION, FIGURE, OR TABLE	PAGE (S)	CONTEXT
Appendix I	Section I.1	I-1	Updated references to the Alaska Federal / State Preparedness Plan for Response to Oil & Hazardous Substance Discharges / Releases (Unified Plan) Annex G (revised October 2012)
	Section I.2.2	I-2 and I-3	MMO title changes to PSO
	Section I.2.4	I-7	MMO title change to PSO
	Section 1.3	I-9	Weblink update
	Section I.4	I-12	Correction to Appendix reference
	Attachment I-1	I-15	Wildlife Response Contact List updated
	Attachment I-2	I-17 through I-43	Updated information from the Alaska Federal / State Preparedness Plan for Response to Oil & Hazardous Substance Discharges / Releases (Unified Plan) Annex G (revised October 2012) appendices
Appendix J	Reviewed: No content change		
Appendix K	Table K.7-1	K-5	Updated reference
Appendix L	Reviewed: Updated weblinks and references		
Appendix M	Section M.2.3	M-4	Editorial change
	Table M.3-1	M-5 and M-6	Editorial changes and response contractor updates (ARS)
Appendix N	Section N.1.2	N-1	Clarification for provision of this scenario within BSEE OSRP
	Table N.1-2	N-4 through N-8	Editorial changes including: <ul style="list-style-type: none"> • Response roles for Shell as IC and their OSRO (ACS) and response contractors • Response contractor updates (ARS) • MMO acronym change to PSO
	Section N.2	N-11 and N-12	Edits to correct Appendix reference, correction to vessel staging descriptions, and response contractor updates
	Section N.3.3	N-14	Editorial corrections and updates
	Section N.4.1.4	N-15	Editorial changes
	Section N.5.4	N-42	MMO title change to PSO
	Section N.7	N-50	This OSRP is subject to BSEE jurisdiction under 30 CFR 254. This language is no longer applicable or accurate, Section deleted

OSRP updates that may not be displayed in the associated redline version or itemized in this change log are categorized as formatting changes such as TOC updates, page layouts, line spacing, and spelling corrections. As such, these modifications do not change OSRP language. Footer updates, reflecting the revision update and Shell's comprehensive biennial review, are displayed in the redline version and applicable throughout Revision 2.

TABLE OF CONTENTS

OSRP QUICK GUIDE	1
A. General	1
B. When to Use.....	1
C. Intended Users of the Quick Guide	1
D. Forms and Information	1

FIGURES

Figure 1	Report of Offshore Environmental Incident Form	3
Figure 2	Spill Volume Estimator.....	5
Figure 3a	Emergency Contact List.....	6
Figure 3b	Agency and External Notification Information.....	7
Figure 3c	Command Staff Contact Information	8
Figure 4a	Response Objectives	10
Figure 4b	ICS 201 Incident Briefing Form	11
Figure 4c	ICS 214A Individual Log.....	16
Figure 4d	Notification Status Report	17

THIS PAGE
INTENTIONALLY
LEFT BLANK

OSRP QUICK GUIDE

A. General

The actions taken during the initial phase of an incident are critical to the effectiveness of the overall response. In the event of an oil spill during Shell's Chukchi Sea Regional Exploration Program, the contact information and forms provided in this Quick Guide will ensure that all required internal and external notifications are made and that an appropriate response is coordinated in a safe and timely manner.

Refer to the **Table of Contents** and the remainder of the OSRP for additional topics and information on notifications, organization, management, and response actions.

B. When to Use

The Quick Guide will be used during the Initial Response (Reactive Phase) of an Incident. Refer to Part 2 for additional information on detailed strategic response planning.

C. Intended Users of the Quick Guide

- Incident Commander
- Qualified Individual
- Operations Officer
- Drilling, Completion, and Well Services Foreman

Refer to Part 2 for additional information on organizational response to oil spills, including escalation and call out of personnel.

D. Forms and Information

Figure 1 Report of an Offshore Environmental Incident Form

Figure 2 Spill Volume Estimator

Refer to Section 2.7 for additional information on Spill Volume Estimation.

Figure 3 Contact Information

- 3a. Emergency Contact List
- 3b. Agency and External Notification Information
- 3c. Command Staff Contact Information

Figure 4 Initial Response Incident Management Forms

- 4a. Response Objectives

This is a list of basic objectives and strategies. Refer to Section 2 for additional information on managing by objectives.

4b. ICS 201 Incident Briefing

This is to be used during the Initial Response for documentation and briefings. (ICS Forms 201-1 through 201-5).

4c. ICS 214a Individual Log

This is to be used by individuals to document actions and communications.

4d. Notification Status Report

This is to be used by the IC or his designee to record external notifications.

Figure 1 Report of Offshore Environmental Incident Form

(Internal SEPCo HSSE use only) Incident Number _____

Report of Offshore Environmental Incident Form (OF-REI)				
DIRECTIONS: This form is to be used to capture information that will be later entered into the Fountain Incident reporting database. When completing this form, please be as complete and specific as possible. When completing this form using MS Word you will only be able to enter information into the shaded portions of the form or by clicking on the check boxes. You can use the TAB key to move to the right or the DOWN ARROW key to move down on the form. You may also use your mouse to click on the cell that you want to complete.				
Date of Incident	Time of Incident	On SEPCo Premises <input type="checkbox"/> Y <input type="checkbox"/> N		
Incident Headline (Brief description of incident – 50 characters or less on the line below)				
Incident Type and Location Information				
<input type="checkbox"/> Spill <input type="checkbox"/> Exceedance of discharge limits (Noncompliance) <input type="checkbox"/> Produced water sheen <input type="checkbox"/> Material lost overboard <input type="checkbox"/> Complaint <input type="checkbox"/> Fire <input type="checkbox"/> Release <input type="checkbox"/> Other(Describe)				
Field Name	Well No./Rig	Block	Platform	
Latitude	Longitude	OCS-G#		
Activity at Location				
<input type="checkbox"/> Drilling/W.O./Completion <input type="checkbox"/> Exploration <input type="checkbox"/> Production <input type="checkbox"/> Construction <input type="checkbox"/> Other				
Specific Operation				
<input type="checkbox"/> Drilling <input type="checkbox"/> Construction <input type="checkbox"/> Operations <input type="checkbox"/> Other <input type="checkbox"/> Workover <input type="checkbox"/> Crane operations <input type="checkbox"/> Well servicing <input type="checkbox"/> Completion <input type="checkbox"/> Equipment handling <input type="checkbox"/> Air transport <input type="checkbox"/> Coil tubing <input type="checkbox"/> Maintenance <input type="checkbox"/> Boat/Ship				
Source (Check all that apply)				
<input type="checkbox"/> Drip pan <input type="checkbox"/> Flowline <input type="checkbox"/> Other surface <input type="checkbox"/> Sump <input type="checkbox"/> Tank/Vessel <input type="checkbox"/> Wellhead <input type="checkbox"/> Flare <input type="checkbox"/> Hoses <input type="checkbox"/> Pipeline <input type="checkbox"/> Rotating equipment <input type="checkbox"/> Transfer equipment <input type="checkbox"/> Other				
Environment Affected				
<input type="checkbox"/> Water <input type="checkbox"/> Air				
What was spilled or released?				
Report spilled or released volume expressing liquid in gallons, dry chemicals in pounds and air emissions in Standard Cubic Feet.				
Gallons (gal)	Pounds (lbs)	Standard Cubic Feet (SCF)		
OIL SPILL INFORMATION				
Slick colors <input type="checkbox"/> Silver/Gray Sheen (spill factor = 0.000004) <input type="checkbox"/> Transitional Dark (spill factor = 0.004) <input type="checkbox"/> Rainbow (spill factor = 0.00004) <input type="checkbox"/> Dark (spill factor = 0.04) <input type="checkbox"/> Metallic (spill factor = 0.0004)				
Size of the slick	feet by	feet	Estimated volume of the spill (feet x feet x 0.624 x spill factor) =	
gallons				
Was the slick <input type="checkbox"/> captured/cleaned up <input type="checkbox"/> allowed to disperse naturally				
How long did the sheen last before natural dispersion or cleaned up? hours				
Weather Information				
Est. current speed	Direction (to)	Estimated wave height	Est. wind speed	Direction (from)
Visibility(nautical miles)		Ceiling (feet)	Ambient temp. (°F.)	
Liquid Spill Properties				
API Gravity Pour Point				
Source Control				
Describe how and when the source of the spill or discharge was stopped				
Describe what was/will be done specifically to prevent reoccurrence? (Procedures changed, equipment repaired, etc)				
What was the cost of repairs/cleanup (Include equipment, repair time, transportation, etc.)				
EXCEEDANCE OF DISCHARGE LIMITS (NONCOMPLIANCE)				
Did a sample fail a Permit test? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Static sheen <input type="checkbox"/> Produced H ₂ O sheen				
Oil and Grease	mg/l	Sanitary chlorine	mg/l	Toxicity
ppm				
Full Description (How did the incident occur?) (Attach additional sheets, if necessary, to complete event description)				

Figure 1 – First Notice Incidental Detail Report (Continued)

(Internal SEPCo HSSE use only) Incident Number _____

INCIDENT EFFECTS					
Environmental	<input type="checkbox"/> Inside impermeable containment/building	<input type="checkbox"/> Gravel surface (roadway or pad)	<input type="checkbox"/> Tundra	<input type="checkbox"/> Confined water body	<input type="checkbox"/> Unconfined or flowing water body
Assets <input type="checkbox"/> None	<input type="checkbox"/> No disruption to operation	<input type="checkbox"/> Brief disruption	<input type="checkbox"/> Partial shutdown, can be restarted	<input type="checkbox"/> Partial operational loss up to 2 weeks	<input type="checkbox"/> Substantial or total loss of operation
Reputational <input type="checkbox"/> None	<input type="checkbox"/> Slight	<input type="checkbox"/> Limited	<input type="checkbox"/> Considerable	<input type="checkbox"/> Major National	<input type="checkbox"/> Major International
Type of Complaint <input type="checkbox"/> (Check if none)					
<input type="checkbox"/> Blast/Vibration <input type="checkbox"/> Lights <input type="checkbox"/> Odor/Fumes <input type="checkbox"/> Debris <input type="checkbox"/> Noise <input type="checkbox"/> Oil Spray <input type="checkbox"/> Smoke <input type="checkbox"/> Flaring <input type="checkbox"/> Other (describe)					
NOTIFICATIONS					
	Notified	Person's Name	Date / Time	Report number	
External Notifications					
National Response Center 1-800-424-8802 (If delegated to by Incident Commander)	<input type="checkbox"/>		/		
Alaska Department of Environmental Conservation 907-451-2121 (Business hours) 1-800-478-9300 (After hours & weekends)	<input type="checkbox"/>		/		
North Slope Borough 907-852-0320 (Planning)	<input type="checkbox"/>		/		
United States Coast Guard 907-271-6700	<input type="checkbox"/>		/		
BSEE 907-334-5300	<input type="checkbox"/>		/		
Internal Notifications (all incidents)					
Incident Commander	<input type="checkbox"/>		/		
Area Leader/Drilling Superintendent	<input type="checkbox"/>		/		
	<input type="checkbox"/>		/		
Witness(es) to the Incident					
Name (Typed or Printed)	Employer	Phone			
<i>I certify that all the above information is true, accurate and complete. Under Federal law, penalties can be assessed for recording false information including fines and imprisonment.</i>					
Report submitted by					
Name (Typed or Printed)	Title	Phone	Date		
Approvals and/or reviewers					
Name (Typed or Printed)	Title	Phone	Date		

Contact the HSSE Incident Management Process Gatekeeper for your organization for submission instructions.

Figure 2 Spill Volume Estimator

- Step 1 – Determine Square Miles based on Length X Width.
- Step 2 – Multiple Percent Coverage X Square Miles = Total Square Miles.
- Step 3 – Enter Spill Appearance Percent based on Aerial Observations.
- Step 4 – Multiply Appearance Percentage X Estimated Gallons per Square Miles (Minimum/Maximum) X Estimated Area covered in Square Miles = Estimated Spill Volume.

LENGTH & WIDTH OF AREA COVERED IN MILES							
	<div style="border: 1px solid black; width: 40px; height: 15px; background-color: #f4a460; margin: 0 auto;"></div> miles	<div style="border: 1px solid black; width: 100px; height: 30px; margin: 0 auto;"></div> miles	<div style="border: 1px solid black; width: 60px; height: 15px; background-color: #add8e6; margin: 0 auto;"></div> miles ²				
PERCENTAGE OF COVERAGE WITHIN AREA ABOVE							
100%							
80%							
60%							
40%							
20%							<div style="border: 1px solid black; width: 50px; height: 15px; background-color: #d8bfd8; margin: 0 auto;"></div>
ESTIMATED AREA COVERED IN SQUARE MILES							
	<div style="border: 1px solid black; width: 40px; height: 15px; background-color: #add8e6; margin: 0 auto;"></div> Miles	X	<div style="border: 1px solid black; width: 40px; height: 15px; background-color: #d8bfd8; margin: 0 auto;"></div> % coverage	=	<div style="border: 1px solid black; width: 40px; height: 15px; background-color: #c1e1c1; margin: 0 auto;"></div>		
APPEARANCE ON THE WATER							
APPEARANCE	%	MIN gal/mi ²	MAX gal/mi ²	X	MIN Gallons	MAX Gallons	
Sheen		26.88	209.7	X			
Rainbow		209.7	3439	X			
Metallic		3439	34406	X			
Transitional Dark		34406	100000	X			
Dark Color		100000	137088	X			
MINIMUM ESTIMATED TOTAL IN GALLONS							
MAXIMUM ESTIMATED TOTAL IN GALLONS*							

**Use the Maximum Estimated Total for initial Reporting and Response*

Figure 3a Emergency Contact List

EMERGENCY RESPONSE COORDINATOR		
Curtis Wright Main: 907-771-7234 Cell: [REDACTED] Email: curtis.wright@shell.com		
SHELL CONTACT LIST		
QI / IC Primary QI / IC Alternate QI / IC Alternate Security Wells Manager Regulatory Affairs Manager HSE Manager Environmental / SD Advisor Shell SART	907-771-7206 907-646-7112 907-771-7217 907-771-7222 907-433-3479 907-646-7112 907-646-7121 907-646-7123 713-241-2532	[REDACTED]
Discoverer Drilling Superintendent Drilling Engineer Drilling Team Lead	Office 907-433-3480 Office 832-337-1009 Office 832-337-0884	[REDACTED]
OIL SPILL RESPONSE CENTERS		
Deadhorse Facility Anchorage Shell Headquarters	907-382-4130 Shell 907-770-3700, CRF 907-865-4900 504-728-4369	
OIL SPILL RESPONSE ORGANIZATIONS		
Alaska Clean Seas (ACS) Address: Main Number Prudhoe Bay ACS Operations Manager North Slope Mutual Aid (if applicable) managed through ACS	Pouch 340022, Prudhoe Bay, AK 99734 907-659-2405 907-659-3202 907-659-2405	
ASRC Energy Services (AES) Address: Main Number Anchorage AES Operations Manager	3900 C Street, Anchorage, AK 99503 907-339-6200 907-339-6200	
UIC Arctic Response Services (ARS) Address: Main Number Anchorage Activation Number	7260 Homer Drive, Anchorage, AK 99518 907 865-4900 907 465-4900	

Shell's IC is also identified as the primary QI as defined in OPA 90 and has the responsibility and authority to initiate spill cleanup operations, obligate funds to carry out response activities, implement response actions, and immediately notify appropriate federal officials and response organizations and act as liaison with the pre-designated FOSC.

NOTE: PLEASE REFER TO TABLE 2.7.1-5 AGENCY AND EXTERNAL NOTIFICATION INFORMATION FOR ADDITIONAL EMERGENCY CONTACT NUMBERS.

Figure 3b Agency and External Notification Information

AGENCY	TELEPHONE	FACSIMILE (FAX)
NRC	800-424-8802	
EPA (NRC will call)	907-271-5083	907-271-3424
Matt Carr (EPA FOOSC) direct line	907-271-3616	907-271-3424
EPA Region 10 – 24 hr Duty Officer	206-553-1264	
ADEC - Business Hours	907-451-2121	907-451-2362
ADEC - after hours and on weekends call ALASKA STATE TROOPERS	800-478-9300	
ADNR - Oil Spill Hotline Recording	907-451-2678	907-451-2751
DOI-OEPC	907-271-5011 907-227-3783 (24 hrs on call) 907-227-3781 (24 hrs on call)	907-271-4102
NSB	907-561-5144 - Anchorage 907-852-2611 - Barrow	907-562-1940
NSB Wildlife Department (Office)	907-852-0440	907-852-0351
NSB Planning	907-852-0320	907-852-0322
NSB Risk Management	907-852-0248	907-852-0356
NSB Mayor's Office	907-852-0200	907-852-0337
NSB Disaster Coordinator	907-852-2822 907-852-6111 (24 hrs on call)	907-852-2475
USCG – Sector Anchorage COTP Zone	907-271-6700	907-271-6765
USFWS (Alaska Maritime National Wildlife Refuge)	907-235-6546	907-235-7783
BSEE	907-334-5300	907-334-5302
ADF&G – Fairbanks	907-459-7285	907-452-6410
City of Barrow	907-852-5211	907-852-5871
Inupiat Community of the Arctic Slope	907-852-4227	907-852-4246
Wainwright Mayor Office	907-763-2815	907-763-2811
Traditional Council	907-763-2535	907-763-2576
Native Village of Point Lay	907-833-2775	907-833-2576
Cully Corporation	907-833-2705	907-833-2715
City of Point Hope	907-368-2537	907-368-2835
Tikigaq Corporation	907-368-2330	907-368-2668
Village of Point Hope		907-368-2332

Figure 3c Command Staff Contact Information

NAME	OFFICE #	PAGER #	CELL #
COMMAND STAFF			
IC/QI			
Buddy Custard	907-771-7206		██████████
Deputy IC /QI			
Susan Childs (Alternate IC / QI)	907-646-7112		██████████
Sean Churchfield (Alternate IC / QI)	907-771-7217		██████████
Public Affairs/Information Officer			
Michelle Malerich	907-771-7247		██████████
Megan Baldino	907-771-7254		██████████
Liaison Officer			
Talitha Birch	907-771-7255		██████████
Greg Horner	907-646-7131		██████████
Safety Officer			
Lucy Jean	907-646-7116		██████████
Chris Holden	907-771-7201		██████████
Legal Officer			
Marc Stone	907-646-7127		██████████
Pat Morris	504-425-4651		██████████
Company Security Officer (IC Support)			
Phil Smith	504-425-4252	██████████	██████████
Martin Padilla	832-337-1900		██████████
Senior Executive (IC Support)			
Pete Slaiby	907-770-3700		
Gary Cameron	907-771-7249		██████████
Executive Liaison (IC Support)			
Peter Velez	281-250-0448		██████████
GENERAL STAFF			
Operations Section Chief			
Curtis Wright	907-771-7234		██████████
ACS Staff	907-659-2405		
AES-RO Staff	907-339-6200		
ARS Staff	907-865-4900		

Figure 3c Command Staff Contact Information (Continued)

NAME	OFFICE #	PAGER #	CELL #
Staging Area Manager			
ACS Staff	907-659-2405		
ARS Staff	907-865-4900		
Source Control			
Ted Bergman	907-433-3479		██████████
Tony Harris	907-433-3480		██████████
Operations Section Branch Directors			
Shell Staff	907-770-3700		
ACS Staff	907-659-2405		
AES-RO Staff	907-339-6200		
ARS Staff	907-865-4900		
Planning Section Chief			
Mickey Battle	907-646-7119		██████████
Greg Guerreiro	907-433-3406		██████████
Technical Specialists			
Michael Macrander	907-646-7123		██████████
Victoria Broje	281-544-7437		██████████
ACS Planning and Development Manager (IMT coach/facilitator)	907-659-3220		
Logistics Section Chief			
Karen Spring	907-646-7111		██████████
Lev Yampolsky	907-646-7160		██████████
Finance Section Chief			
Gary Becker	907-646-7151		██████████
Zach Reigle	907-646-7105		██████████

Figure 4a Response Objectives

INCIDENT NAME: _____

MAXIMIZE HEALTH & SAFETY OF RESPONSE PERSONNEL	
<input type="checkbox"/>	1) Safety is the first priority.
<input type="checkbox"/>	2) Perform site characterizations.
<input type="checkbox"/>	3) Restrict access to "hot" and "warm" zones to properly trained & equipped personnel.
MINIMIZE HEALTH & SAFETY IMPACTS TO THE GENERAL PUBLIC	
<input type="checkbox"/>	1) Establish secure safety zones.
<input type="checkbox"/>	2) Issue notifications to mariners.
<input type="checkbox"/>	3) Restrict air space over the incident scene.
<input type="checkbox"/>	4) Conduct air and water quality monitoring, as necessary.
CONTROL & STABILIZE SOURCE	
<input type="checkbox"/>	1) Be prepared for a fire.
<input type="checkbox"/>	2) Conduct a damage assessment.
<input type="checkbox"/>	3) Commence well control operations.
MAXIMIZE PROTECTION OF SENSITIVE AREAS	
<input type="checkbox"/>	1) Use resources available and ACP to identify sensitive areas.
<input type="checkbox"/>	2) Develop and implement protection strategies.
<input type="checkbox"/>	3) Prioritize areas, as necessary.
DEVELOP A COMPREHENSIVE, INTEGRATED PLAN	
<input type="checkbox"/>	1) Obtain approval to use dispersants.
<input type="checkbox"/>	2) Obtain approval to commence <i>in situ</i> burning.
<input type="checkbox"/>	3) Use high capacity recovery devices in thickest concentrations.
<input type="checkbox"/>	4) Support on-water operations with surveillance and spotter aircraft (continuously).
<input type="checkbox"/>	5) Prepare shorelines for the arrival of oil.
<input type="checkbox"/>	6) Initiate wildlife protection operations.
<input type="checkbox"/>	7) Initiate NRDA operations.
<input type="checkbox"/>	8) Establish staging areas.
<input type="checkbox"/>	9) Develop disposal plans.
<input type="checkbox"/>	10) Integrate agency response personnel into IMT.
<input type="checkbox"/>	11) Keep the public informed.
<input type="checkbox"/>	12) Be prepared to respond to claim issues.

Figure 4b ICS 201 Incident Briefing Form

1. Incident Name:	2. Prepared by: (Name) Date: _____ Time: _____	INCIDENT BRIEFING ICS 201-1
3. Map/Sketch (include sketch, showing the total area of operations, the incident site/area, overflight results, trajectories, impacted shorelines, or other graphics depicting situational and response status)		
4. Current Situation:		

Figure 4b ICS 201 Incident Briefing Form (Continued)

1. Incident Name:	2. Prepared by: (Name) Date: _____ Time: _____	INCIDENT BRIEFING ICS 201-2
5. Initial Response Objectives, Current Actions, Planned Actions		

INCIDENT BRIEFING

ICS 201 (pg 2 of 5)

Figure 4b ICS 201 Incident Briefing Form (Continued)

1. Incident Name:	2. Prepared by: (Name) Date: _____ Time: _____	INCIDENT BRIEFING ICS 201-3
6. Current Organization		
<pre> graph TD RP[RP/IC] --- FOSC[FOSC] FOSC --- SOSC[SOSC] SOSC --- LOSC[LOSC] LOSC --- SO[Safety Officer] FOSC --- LO[Liaison Officer] SOSC --- PIO[Public Information Officer] LOSC --- LEG[Legal Officer] SO --- C[] LO --- C PIO --- C LEG --- C C --- OPS[Operations Section] C --- PLAN[Planning Section] C --- LOG[Logistics Section] C --- FIN[Finance Section] style C width:0px,height:0px </pre>		

INCIDENT BRIEFING

ICS 201 (pg 3 of 5)

Figure 4b ICS 201 Incident Briefing Form (Continued)

1. Incident Name:		2. Prepared by: (Name) Date: _____ Time: _____		INCIDENT BRIEFING ICS 201-5	
SITE CONTROL					
1. Is Site control set up? <input type="checkbox"/> Yes <input type="checkbox"/> No		2. Is there an on-scene command post? <input type="checkbox"/> Yes <input type="checkbox"/> No If so, where?			
3. Have all personnel been accounted for? <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Don't Know		Injuries:		Fatalities:	
		Unaccounted:		Trapped:	
4. Are observers involved, or rescue attempts planned? Observers: <input type="checkbox"/> Yes <input type="checkbox"/> No Rescuers: <input type="checkbox"/> Yes <input type="checkbox"/> No		5. Are decontamination areas setup? <input type="checkbox"/> Yes <input type="checkbox"/> No If so, where?			
HAZARD IDENTIFICATION, IMMEDIATE SIGNS OF: (IF YES, EXPLAIN IN REMARKS)					
1. Electrical line(s) down or overhead? <input type="checkbox"/> Yes <input type="checkbox"/> No		2. Unidentified liquid or solid products visible? <input type="checkbox"/> Yes <input type="checkbox"/> No			
3. Wind direction across incident: <input type="checkbox"/> Towards your position Wind Speed <input type="checkbox"/> Away from your Position		4. Is a safe approach possible? <input type="checkbox"/> Yes <input type="checkbox"/> No			
5. Odors or smells? <input type="checkbox"/> Yes <input type="checkbox"/> No		6. Vapors visible? <input type="checkbox"/> Yes <input type="checkbox"/> No			
7. Holes, ditches, fast water, cliffs, etc. nearby? <input type="checkbox"/> Yes <input type="checkbox"/> No		8. Fire, sparks, sources of ignition nearby? <input type="checkbox"/> Yes <input type="checkbox"/> No			
9. Is local traffic a potential problem? <input type="checkbox"/> Yes <input type="checkbox"/> No		10. Product placards, color codes visible? Yes No			
11. Other Hazards? <input type="checkbox"/> Yes <input type="checkbox"/> No		12. As you approach the scene from the upwind side, do you note a change in the status of any of the above? Yes No			
HAZARD MITIGATION: HAVE YOU DETERMINED THE NECESSITY FOR ANY OF THE FOLLOWING?					
1. Entry Objectives:					
2. Warning sign(s), barriers, color codes in place? <input type="checkbox"/> Yes <input type="checkbox"/> No					
3. Hazardous material being monitored? <input type="checkbox"/> Yes <input type="checkbox"/> No 3a. Sampling Equipment: 3b. Sampling location(s): 3c. Sampling frequency: 3d. Personal exposure monitoring:					
4. Protective gear / level: 4b. Respirators: 4d. Boots:			4a. Gloves: 4c. Clothing: 4e. Chemical cartridge change frequency:		
5. Decontamination 5a. Instructions: 5b. Decontamination equipment and materials:					
6. Emergency escape route established? <input type="checkbox"/> Yes <input type="checkbox"/> No Route?					
7. Field responders briefed on hazards? <input type="checkbox"/> Yes <input type="checkbox"/> No					
8. Remarks:					

INCIDENT BRIEFING

ICS 201 (pg 5 of 5)

Figure 4c ICS 214A Individual Log

1. Incident Name:	2. Prepared by: (Name) Date: _____ Time: _____	INCIDENT BRIEFING ICS 214a
3. Individual Name:	4. ICS Section	5. Assignment/Location
6. Activity Log		Page ____ of ____
Time	Major Event or Conversation	
7. Prepared By:	Date/Time	

Individual Log

ICS 214A

Figure 4d Notification Status Report

Notification Status Report								
Incident: _____				Prepared by: _____ at: _____				
Period: ____/____/____ : ____ to ____/____/____ : ____				Version Name: _____				
Organization Notified	Phone	Date /Time Notified	Person Contacted	Person Contacted Email	Case No.	Follow Up	ETA On Site	Notified By
Notes: _____								
Notes: _____								
Notes: _____								
Notes: _____								
Notes: _____								
Notes: _____								

THIS PAGE
INTENTIONALLY
LEFT BLANK

TABLE OF CONTENTS [30 CFR 254.22(b)]

OSRP QUICK GUIDE 1

A. General 1

B. When to Use..... 1

C. Intended Users of the Quick Guide 1

D. Forms and Information 1

FIGURES

Figure 1 Report of Offshore Environmental Incident Form3

Figure 2 Spill Volume Estimator.....5

Figure 3a Emergency Contact List.....6

Figure 3b Agency and External Notification Information.....7

Figure 3c Command Staff Contact Information8

Figure 4a Response Objectives10

Figure 4b ICS 201 Incident Briefing Form 11

Figure 4c ICS 214A Individual Log.....16

Figure 4d Notification Status Report17

PART 1 INTRODUCTION AND PLAN CONTENTS [30 CFR 254.22] 1-1

FACILITY INFORMATION STATEMENT 1-3

CONTRACT CERTIFICATION STATEMENT 1-3

1.1 IDENTIFICATION OF FACILITY COVERED IN THE PLAN [30 CFR 254.22(a)] 1-3

 1.1.1 Location1-3

 1.1.2 Facility Type.....1-4

1.2 RECORD OF REVISIONS [30 CFR 254.22(c)]..... 1-21

1.3 UPDATING PROCEDURES..... 1-22

1.4 ACRONYMS AND ABBREVIATIONS..... 1-23

FIGURES

Figure 1.1-1 Chukchi Sea Lease Blocks April 2011..... 1-12

Figure 1.1-2 *Discoverer* Drillship Outboard Profile Schematic..... 1-16

Figure 1.1-3 *Discoverer* Drillship Main Deck and Above Schematic 1-17

Figure 1.1-4 *Discoverer* Drillship Main Deck View..... 1-18

Figure 1.1-5 *Discoverer* Drillship Lower Deck Schematic..... 1-19

Figure 1.1-6 *Discoverer* Drillship Lower Deck View 2..... 1-20

TABLES

Table 1.1-1 Leases Owned by Shell in the Chukchi Sea..... 1-5

Table 1.1-2 *Discoverer* Service Facilities 1-13

Table 1.4-1 Acronyms and Abbreviations 1-24

PART 2 - EMERGENCY RESPONSE ACTION PLAN

2.1 QUALIFIED INDIVIDUAL DESIGNATION [30 CFR 254.23(a)]2-1

2.2 INCIDENT MANAGEMENT TEAM DESIGNATION [30 CFR 254.23(b)].....2-1

2.3 SPILL RESPONSE OPERATING TEAM [30 CFR 254.23(c)]2-9

 2.3.1 Trained and Available on 24-hour Basis.....2-9

 2.3.2 Spill Response Coordinator and Alternate(s)2-9

2.4	SPILL RESPONSE OPERATIONS CENTER (INCIDENT COMMAND POST) AND COMMUNICATIONS [30 CFR 254.23(d)]	2-10
2.4.1	Incident Command Post.....	2-10
2.4.2	Communications Plan	2-12
2.4.3	Communications Equipment	2-12
2.4.3.1	Drillship Communication	2-14
2.4.3.2	Intercom System	2-15
2.4.3.3	Page and Alarm System	2-15
2.4.3.4	Communication and Navigation Equipment, <i>Discoverer</i>	2-15
2.4.3.5	Patch Number 1 and Patch Number 2	2-16
2.4.4	Equipment Maintenance	2-16
2.5	LISTING OF TYPES AND CHARACTERISTICS OF OIL HANDLED/ STORED/ TRANSPORTED AT FACILITY [30 CFR 254.23(e)]	2-16
2.6	PROCEDURES FOR EARLY DETECTION OF A SPILL [30 CFR 254.23(f)].....	2-17
2.6.1	Drillship Integrity Inspections	2-17
2.6.2	Drilling Operations	2-18
2.6.3	Automated Methods.....	2-17
2.7	RESPONSE PROCEDURES [30 CFR 254.23(g)]	2-18
2.7.1	Spill Notification Procedures [30 CFR 254.23(g)(1)].....	2-19
2.7.1.1	Initial Reporting	2-21
2.7.1.2	External Notification Procedures.....	2-28
2.7.1.3	Written Reporting Requirements.....	2-28
2.7.2	Spill Assessment [30 CFR 254.23(g)(2)]	2-31
2.7.3	Sensitive Areas [30 CFR 254.23(g)(3)]	2-32
2.7.4	Resource Protection Methods [30 CFR 254.23(g)(4)]	2-40
2.7.5	Response Asset Mobilization, Deployment, and Support [30 CFR 254.23(g)(5)].....	2-42
2.7.6	Procedures to Ensure Sufficient Recovered Oil Storage for Continued Recovery Operations [30 CFR 254.23(g)(6)].....	2-45
2.7.7	Procedures to Remove Oil and Oiled Debris from Shallow Waters and Along Shorelines and Rehabilitate Oiled Waterfowl [30 CFR 254.23(g)(7)].....	2-46
2.7.8	Procedures to Store, Transfer, and Dispose of Recovered Oil and Oil-Contaminated Materials [30 CFR 254.23(g)(8)].....	2-54
2.7.9	Methods to Implement Dispersant Use and <i>In Situ</i> Burn Plans [30 CFR 254.23(g)(9)].....	2-56
2.7.9.1	Dispersants	2-56
2.7.9.2	<i>In Situ</i> Burning.....	2-57

FIGURES

Figure 2.2-1	Incident Command System	2-3
Figure 2.4.1-1	Anchorage Command Center.....	2-10
Figure 2.4.1-2	Shell Staging Areas.....	2-11
Figure 2.7.1-1	Internal Emergency Notification Process Diagram	2-23
Figure 2.7.1-2	Shell Report of Offshore Environmental Incident Form.....	2-26
Figure 2.7.3-1	Chukchi Sea Shoreline Protection ACS Map Atlas Sheet Index	2-39
Figure 2.7.7-1	Shoreline Containment and Protection.....	2-51
Figure 2.7.7-2	Shoreline Containment and Recovery Operations.....	2-51
Figure 2.7.7-3	Shoreline Cleanup and Backwater Protection	2-52
Figure 2.7.7-4	Nearshore Diversion and Recovery of Oil	2-52

Figure 2.7.7-5	Nearshore Recovery in Broken Ice.....	2-53
Figure 2.7.7-6	Nearshore Ignition of Oil In Ice.....	2-53

TABLES

Table 2.2-1	IMT Contact Information.....	2-4
Table 2.2-2	IMT Responsibilities and Checklist.....	2-6
Table 2.4.3-1	Summary of Alaska Statewide Frequency Plan Channels.....	2-13
Table 2.7.1-1	Emergency Action Checklist.....	2-20
Table 2.7.1-2	Initial Spill Response and Notification Process – Tier I Spill.....	2-21
Table 2.7.1-3	Initial Spill Response and Notification Process – Tier II or Tier III Spill.....	2-22
Table 2.7.1-4	Emergency Contact List.....	2-24
Table 2.7.1-5	Agency and External Notification Information.....	2-25
Table 2.7.1-6	Agency Reporting Requirements for Oil Spills.....	2-29
Table 2.7.2-1	Spill Assessment Tactics References.....	2-31
Table 2.7.3-1	Sensitive Area Prioritization Tactics References.....	2-32
Table 2.7.3-2	Shoreline Protection Assessment for Point Barrow to Cape Lisburne.....	2-35
Table 2.7.3-3	Site-Specific Environmental Assessment Agency Consultation List.....	2-38
Table 2.7.4-1	Sensitive Area Protection Tactics Reference.....	2-40
Table 2.7.5-1	Equipment Mobilization and Deployment (Logistics) Tactics References.....	2-42
Table 2.7.5-2	Transportation Options.....	2-44
Table 2.7.6-1	Storage Equipment for Recovery Operations.....	2-45
Table 2.7.7-1	Offshore Recovery Summer Conditions Tactic References.....	2-46
Table 2.7.7-2	Offshore Recovery in Varying Ice Conditions Tactic References.....	2-47
Table 2.7.7-3	Nearshore Response Tactics References.....	2-48
Table 2.7.8-1	Storage, Transfer, and Disposal Tactics References.....	2-54
Table 2.7.8-2	Onshore Waste Disposal Facilities and Disposal Methods.....	2-55
Table 2.7.9-1	Dispersant Tactics References.....	2-56
Table 2.7.9-2	<i>In Situ</i> Burning Tactics References.....	2-57

APPENDICES

APPENDIX A - RESPONSE EQUIPMENT [30 CFR 254.24]

A.1	EQUIPMENT INVENTORY [30 CFR 254.24(a)].....	A-1
A.2	MARINE VESSELS IN SUPPORT OF CHUKCHI SEA EXPLORATION DRILLING PROGRAM.....	A-5
A.3	AERIAL SUPPORT OF CHUKCHI SEA EXPLORATION DRILLING PROGRAM.....	A-18
A.4	DISCUSSION OF SHELL TECHNOLOGIES AND SYSTEMS.....	A-22
A.5	MANPOWER SOURCES AND AVAILABILITY.....	A-25
A.6	INSPECTION AND MAINTENANCE PROGRAMS [30 CFR 254.24(b)].....	A-28

FIGURES

Figure A-1	Capping Stack.....	A-24
------------	--------------------	------

TABLES

Table A-1	OSRO Contacts and Equipment.....	A-1
Table A-2	Shell-Chartered Offshore Equipment Information.....	A-2
Table A-3	Personnel Resources for Worst Case Discharge.....	A-4
Table A-4	List of Marine Vessels in Support of Chukchi Sea Exploration Drilling Program.....	A-5

Table A-5	List of Aircraft in Support of Chukchi Sea Exploration Drilling Program	A-18
Table A-6	Response Assets Available to Deploy	A-22
Table A-7	Capping Stack Overview	A-24

APPENDIX B - CONTRACTUAL AGREEMENTS [30 CFR 254.25]

TABLES

Table B-1	Certification of Memberships and Contractual Agreements	B-1
-----------	---	-----

APPENDIX C - WORST CASE DISCHARGE SCENARIO [30 CFR 254.26]

C.1	WCD VOLUME [30 CFR 254.26(a)]	C-1
C.2	TRAJECTORY ANALYSIS [30 CFR 254.26(b)]	C-2
C.3	ENVIRONMENTAL RESOURCES [30 CFR 254.26(c)]	C-4
C.4	WCD RESPONSE [30 CFR 254.26(d)]	C-5

FIGURES

Figure C-1	Worst Case Discharge Day-30 of Trajectory	C-3
Figure C-2	Offshore Blowout Mechanical Operations Organization	C-9
Figure C-3	Primary Response to an Offshore Blowout	C-10
Figure C-4	ACS Tactic L-10	C-17

TABLES

Table C-1	Worst Case Discharge Location	C-1
Table C-2	U.S. BSEE Worst Case Discharge Volume Exploration Well Blowout	C-1
Table C-3	Worst Case Discharge Major Equipment	C-7
Table C-4	Personnel Resources for Worst Case Discharge	C-16
Table C-5	Response Strategy Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions	C-19

APPENDIX D - DISPERSANT USE PLAN [30 CFR 254.27]

D.1	OVERVIEW	D-1
D.2	INVENTORY AND LOCATION OF DISPERSANT [30 CFR 254.27(a)]	D-1
D.3	PRODUCT TOXICITY DATA [30 CFR 254.27(b)]	D-2
D.4	EQUIPMENT MOBILIZATION [30 CFR 254.27(c)]	D-3
D.5	DISPERSANT APPLICATION PROCEDURES [30 CFR 254.27(d)]	D-4
D.6	POTENTIAL CONDITIONS FOR DISPERSANT APPLICATION [30 CFR 254.27(e)]	D-5
D.7	DECISION AND APPROVAL PROCESS [30 CFR 254.27(f)]	D-8
D.8	MONITORING	D-9

FIGURES

Figure D.7-1	Field Operations: Dispersants Operations Group	D-8
Figure D.8-1	Oil Spill Response Checklist: Dispersant Use	D-10

TABLES

Table D.2-1	Dispersant Inventory and Location	D-2
Table D.4-1	Dispersant Equipment and Location	D-3
Table D.5-1	Non-mechanical Response Tactics References	D-4

APPENDIX E - *IN SITU* BURNING PLAN [30 CFR 254.28]

E.1	<i>IN SITU</i> BURNING EQUIPMENT	E-1
E.2	<i>IN SITU</i> BURNING PROCEDURES	E-2
E.3	ENVIRONMENTAL EFFECTS OF <i>IN SITU</i> BURNING.....	E-3
E.4	GUIDELINES FOR WELL CONTROL AND SAFETY OF PERSONNEL AND PROPERTY.....	E-6
E.5	CONDITIONS FOR USE	E-6
E.6	DECISION PROCESSES.....	E-9
E.7	APPROVAL PROCEDURES AND FORMS.....	E-10

FIGURES

Figure E-1	Application and Burn Plan.....	E-11
------------	--------------------------------	------

TABLES

Table E-1	<i>In Situ</i> Burning Equipment	E-1
Table E-2	<i>In Situ</i> Burning Example TFs	E-2
Table E-3	<i>In Situ</i> Burning Tactics Reference.....	E-3
Table E-4	Safe Working Distances From the Fire.....	E-6
Table E-5	Minimum Ignitable Oil Thickness on Water	E-7
Table E-6	Burn Removal Rates for Large Fires on Water.....	E-7
Table E-7	Fire Extinguishing Slick Thickness	E-8

APPENDIX F - TRAINING AND DRILL INFORMATION [30 CFR 254.29]

F.1	TRAINING AGENDA FOR MANAGERS OF SPILL RESPONSE TEAM AND QUALIFIED INDIVIDUAL.....	F-1
F.2	TRAINING AGENDA FOR SPILL RESPONSE TEAM MEMBERS	F-1
F.3	TRAINING RECORD STORAGE.....	F-3
F.4	OTHER TRAINING.....	F-11
F.5	NATIONAL PREPAREDNESS FOR RESPONSE EXERCISE PROGRAM	F-12
F.6	RECORD OF EXERCISES.....	F-13

FIGURES

Figure F-1	Shell IMT / QI Training - January 2012.....	F-6
Figure F-2	Shell IMT / ICS 300 Training - January 2012.....	F-9

TABLES

Table F-1	OSHA 29 CFR 1910.120(q) Emergency Response Training Requirements.....	F-2
Table F-2	Shell Training Records – Contact and Location	F-3
Table F-3	OSRO Training Records – Contact and Location.....	F-4
Table F-4	Response Contractor Training Records – Contact and Location.....	F-4
Table F-5	Training Records – IC, IMT	F-4
Table F-6	IMT Dispersant Application / <i>In Situ</i> Burning Training	F-5
Table F-7	Example MSRC Dispersant Aircraft Flight / Training.....	F-5
Table F-8	Shell 2013 IMT Training.....	F-11
Table F-9	NPREP Spill Response Exercises	F-12

APPENDIX G - LOGISTICAL SUPPORT SERVICES AND SUPPLIES

FIGURES

Figure G-1	Primary and Secondary North Slope Airfields	G-7
Figure G-2	Main Shell Locations and Transit Times.....	G-8

TABLES

Table G-1	Logistical Support Contractors	G-3
Table G-2	Primary Logistical Airfields	G-6

APPENDIX H - RESPONSE OPERATING CONDITIONS AND LIMITATIONS

H.1	OPERATIONS.....	H-1
H.2	METEOROLOGICAL CONDITIONS.....	H-1
H.3	PHYSICAL OCEANOGRAPHY	H-1
H.4	DISCUSSION REGARDING OPERATIONAL LIMITATIONS FOR RESPONSE EQUIPMENT	H-2
H.5	ADVERSE WEATHER CONDITIONS	H-6
	H.5.1 High Winds	H-6
	H.5.2 Temperature	H-7
H.6	SEA STATES, TIDES AND CURRENTS.....	H-8
	H.6.1 Sea State.....	H-8
	H.6.2 Tides and Currents	H-10
H.7	STRUCTURAL ICING	H-10
H.8	HOURS OF DAYLIGHT AND VISIBILITY	H-10
	H.8.1 Hours of Daylight	H-10
	H.8.2 Visibility.....	H-11
H.9	SEASONAL ICE CONDITIONS.....	H-11
	H.9.1 Breakup	H-12
	H.9.2 Response in Broken Ice.....	H-13
	H.9.3 Effectiveness of <i>In Situ</i> Burning in Open Water and in Ice	H-14
	H.9.4 Open Water with Current	H-14
	H.9.5 Open Water with Little or No Current	H-14
	H.9.6 Low to Moderate Ice Concentrations (With and Without Current).....	H-15
	H.9.7 High Ice Concentrations and Continuous Layers of New Ice in Early Winter	H-16
	H.9.8 Very Close Winter Pack Ice (Greater Than 9/10 Concentration)	H-17

FIGURES

Figure H.9-1	Comparison of Regional Ice Conditions	H-13
--------------	---	------

TABLES

Table H.4-1	Ice Alert Levels	H-4
Table H.4-2	Ice Alert Roles and Responsibilities	H-5
Table H.5-1	Average and Maximum Wind Speeds	H-7
Table H.5-2	Percentages of Days per Month that Temperature Could Reduce Response Effectiveness for Worker Threshold Limit Values	H-8
Table H.6-1	Beaufort Wind Force and Sea State Relationship Between Wind and Wave Conditions in Fully Developed Seas.....	H-9

APPENDIX I - WILDLIFE RESPONSE PLAN

I.1	INTRODUCTION.....	I-1
I.2	WILDLIFE RESPONSE PLANNING MEASURES	I-2
I.2.1	Wildlife Risk Assessment	I-2
I.2.2	Wildlife Reconnaissance	I-2
I.2.3	Wildlife Hazing	I-3
I.2.4	Wildlife Recovery and Care.....	I-5
I.3	WILDLIFE RESPONSE STRATEGIES.....	I-9
I.4	MIGRATORY BIRDS.....	I-9
I.5	MARINE AND TERRESTRIAL MAMMALS.....	I-12

TABLES

Table I.2-1	State and Federal Permits and/or Authorizations Required for Hazing, Collecting, or Holding Live Animals.....	I-4
Table I.4-1	Migratory Birds.....	I-10
Table I.5-1	Marine Mammals	I-14
Table I.5-2	Terrestrial Mammals	I-14

ATTACHMENTS

Attachment I-1	Wildlife Response Contact List.....	I-15
Attachment I-2	Facilities and Permit Applications.....	I-17
Attachment I-3	Polar Bear Interaction Measures.....	I-41

APPENDIX J- FORMS

J.1	WEATHER REPORT.....	J-1
J.2	NOTIFICATION REPORT	J-3
J.3	INCIDENT BRIEFING (ICS FORM 201)	J-5
J.4	RESPONSE OBJECTIVES FORM (ICS FORM 202).....	J-10
J.5	SITE SAFETY AND HEALTH PLAN (ICS FORM 208)	J-12
J.6	INDIVIDUAL LOG (ICS FORM 214A).....	J-15

APPENDIX K - OIL AND DEBRIS DISPOSAL PROCEDURES

K.1	INTRODUCTION.....	K-1
K.2	WASTE CATEGORIES	K-2
K.3	COLLECTION AND SEGREGATION OF RECOVERED OIL	K-2
K.4	OIL AND DEBRIS SEPARATION AND DISPOSAL	K-3
K.5	TEMPORARY STORAGE OF RECOVERED OIL AND WASTE.....	K-3
K.6	DISPOSAL REGULATIONS	K-4
K.7	DISPOSAL TRANSPORTATION AND DESIGNATED SITES	K-5

FIGURES

Figure K-1	Shell Waste Management Plan Template	K-6
------------	--	-----

TABLES

Table K-1	Onshore Waste Disposal Facilities and Disposal Methods.....	K-5
Table K-2	Oil/ Water/ Debris Separation Strategies.....	K-11
Table K-3	Temporary Storage Methods	K-12

APPENDIX L - BIBLIOGRAPHY

APPENDIX M - USCG SUPPLEMENT

M.1	CROSS REFERENCE TO USCG AND DEPARTMENT OF HOMELAND SECURITY [33 CFR 154]	M-1
M.2	POTENTIAL DISCHARGES	M-3
	M.2.1 Average Most Probable Discharge	M-3
	M.2.2 Maximum Most Probable Discharge	M-3
	M.2.3 Worst Case Discharge	M-4
M.3	RESPONSE STRATEGY – FUEL TRANSFER RELEASE DURING SUMMER MONTHS	M-4
	M.3.1 Response Strategy Parameters	M-4
M.4	FUEL TRANSFER PROCEDURES	M-7
	M.4.1 Introduction	M-7
	M.4.2 Drillship Internal Fuel Transfers	M-7
	M.4.3 Helicopter Fuel Transfer	M-8
	M.4.4 Drillship Fuel Transfers	M-8
	M.4.5 Fuel Transfer Vessel	M-8
	M.4.6 <i>Discoverer</i> Fuel Transfer Procedures	M-9
	M.4.7 Oil Spill Response Vessel and Barge Fuel Transfer Procedures	M-11
M.5	PRODUCT SPECIFICATION FOR LOW SULFUR DIESEL FUEL OIL	M-23

TABLES

Table M.1-1	Cross Reference to USCG and Department of Homeland Security Response Plans for Oil Facilities Transferring Oil or Hazardous Material in Bulk	M-1
Table M.3-1	Fuel Transfer Release During Summer Response Strategy	M-5

APPENDIX N - ADEC SUPPLEMENT

N.1	ADEC-SPECIFIC SCENARIO RESPONSE PLANNING STANDARD DISCHARGE UNCONTROLLED SUBSEA WELL RELEASE DURING SUMMER MONTHS	N-1
	N.1.1 Introduction	N-1
	N.1.2 Response Scenario Parameters	N-1
N.2	RECOVERY STRATEGIES	N-11
N.3	SURFACE CONTROL AND SUBSEA CAPPING AND CONTAINMENT CAPABILITY	N-12
	N.3.1 Introduction	N-12
	N.3.2 Surface Control Options	N-12
	N.3.3 Subsea Capping and Subsea Containment Capability	N-13
N.4	PREVENTION PLAN [18 AAC 75.425(e)(2)]	N-14
	N.4.1 Prevention, Inspection, and Maintenance Programs [18 AAC 75.425(e)(2)(A)]	N-14
	N.4.1.1 Prevention Training Programs [18 AAC 75.020]	N-14
	N.4.1.2 Substance Abuse Programs [18 AAC 75.007(e)]	N-15
	N.4.1.3 Medical Monitoring [18 AAC 75.007(e)]	N-15
	N.4.1.4 Security Program [18 AAC 75.007(f)]	N-15
	N.4.1.5 Fuel Transfer Procedures [18 AAC 75.025]	N-16

	N.4.1.6	Maintenance Programs	N-18
	N.4.1.7	Operating Requirements for Exploration [18 AAC 75.045]	N-18
	N.4.1.8	Blowout Prevention and Emergency Shutdown [18 AAC 75.425(e)(1)(I)]	N-19
	N.4.1.9	Oil Storage Tanks [18 AAC 75.065]	N-26
	N.4.1.10	Emergency Tow and Escort Vessels Program	N-27
N.4.2		Discharge History (>55 Gal) [18 AAC 75.425(e)(2)(B)]	N-27
N.4.3		Analysis of Potential Discharges [18 AAC 75.425(e)(2)(C)]	N-27
	N.4.3.1	Potential Areas for Discharge	N-27
N.4.4		Operational Conditions Increasing Risk of Discharge [18 AAC 75.425(e)(2)(D)]	N-30
	N.4.4.1	Severe Weather	N-30
	N.4.4.2	Ice Conditions	N-31
	N.4.4.3	Structural Icing	N-32
	N.4.4.4	Critical Operations and Curtailment Plan	N-32
	N.4.4.5	Hours of Light at 71°N Latitude	N-33
N.4.5		Discharge Detection [18 AAC 75.425(e)(2)(E)]	N-34
	N.4.5.1	Drilling Operations	N-34
	N.4.5.2	Automated Methods	N-34
N.4.6		Rationale for Claimed Prevention Credits [18 AAC 75.425(e)(2)(F)]	N-34
N.4.7		Compliance Schedule [18 AAC 75.425(e)(2)(G)]	N-34
N.5		BEST AVAILABLE TECHNOLOGY [18 AAC 75.425(e)(4)]	N-35
N.5.1		Communications [18 AAC 75.425(e)(4)(A)(i)]	N-36
N.5.2		Source Control [18 AAC 75.425(e)(4)(A)(i)]	N-37
	N.5.2.1	Well Source Control	N-37
	N.5.2.2	Tank Source Control	N-41
N.5.3		Trajectory Analyses [18 AAC 75.425(e)(4)(A)(i)]	N-41
N.5.4		Wildlife Capture, Treatment, and Release Programs [18 AAC 75.425(e)(4)(A)(i)]	N-42
N.5.5		Cathodic Protection [18 AAC 75.076(h)(4)(A)(ii)]	N-42
N.5.6		Leak Detection Tanks [18 AAC 75.425(e)(4)(A)(ii)]	N-42
N.5.7		Tank Liquid Level Determination [18 AAC 75.425(e)(4)(A)(ii)]	N-42
N.5.8		Maintenance Procedures for Buried Steel Piping [18 AAC 75.425(e)(4)(A)(ii)]	N-46
N.5.9		Protective Wrapping or Coating for Tanks and Pipeline [18 AAC 75.425(e)(4)(A)(ii)]	N-46
N.5.10		Corrosion Surveys for an Existing Installation	N-46
N.5.11		Pipeline Leak Detection	N-46
N.6		RESPONSE PLANNING STANDARDS [18 AAC 75.425(e)(5)]	N-46
N.6.1		Well Blowout	N-46
N.6.2		Fuel Transfer Strategy [18 AAC 75.025]	N-46
N.6.3		Rationale for Claimed Prevention Credits [18 AAC 75.425(e)(2)(F)]	N-46
N.7		RENEWAL REQUIREMENTS	N-50

FIGURES

Figure N.4-1	Models for Site-Specific Well Control	N-21
Figure N.4-2	Real Time Operations Center	N-23
Figure N.4-3	Example of a BOP	N-24
Figure N.4-4	Discoverer Drillship Blowout Prevention Equipment System	N-25

TABLES

Table N.1-1	ADEC-Specific Scenario Uncontrolled Subsea Well Release During Summer Months.....	N-2
Table N.1-2	ADEC-Specific Scenario Uncontrolled Subsea Well Release During Summer Months.....	N-4
Table N.1-3	Well Blowout in Summer Response Equipment Mobilization Chart for Open Water Task Force.....	N-10
Table N.4-1	Summary of Potential Discharges	N-28
Table N.4-2	Potential Discharge for Alaska Offshore Drilling (1997 to 2003).....	N-29
Table N.5-1	Best Available Technology Analysis Well Blowout Source Control.....	N-39
Table N.5-2	Best Available Technology Analysis Leak Detection for Tank	N-44
Table N.5-3	Best Available Technology Analysis Tank Liquid Level Determination System.....	N-45
Table N.6-1	Well Blowout in Summer Derated Potential Recovery Capability	N-48

PART 1 INTRODUCTION AND PLAN CONTENTS [30 CFR 254.22]

This OSRP is presented in a format that follows BSEE regulatory requirements (outlined in 30 CFR 254), as noted in the headings. Information specific to the USCG (33 CFR 154) requirements is presented in Appendix M (USCG Supplement). Although the approval of Shell's OSRP does not fall under State of Alaska's jurisdictional authority, additional information of interest to the State is presented in Appendix N, ADEC Supplement, in a context that reflects consideration of ADEC requirements.

This OSRP is developed to serve as a regional oil spill response plan for Shell's multiyear Chukchi Sea Regional Exploration Drilling Program. Each year's drilling operations are planned to total depth at multiple drill site locations and shall be performed consistent with the current Chukchi Sea EP. Well drilling activities are complete when the well is plugged and abandoned in accordance with BSEE regulations, and there are no exposed formations capable of flowing oil or gas.

For the purposes of this OSRP the Spill Management Team, as referenced in 30 CFR 254.23a, is referred to as the IMT. Shell's trained IMT members are available to fill IMT positions on a 24-hour basis. The purpose of this OSRP is to:

- Assist the IMT in achieving an efficient, coordinated, and effective response to a discharge incident.
- Meet all regulatory requirements as per 30 CFR Part 254.
- Assist in preparing for and responding safely and quickly to a discharge originating from facilities covered in this OSRP.

The ACP is established as the Alaska Federal and State Preparedness Plan for Response to Oil and Hazardous Substance Discharges and Releases (Unified Plan), Volume I and the North Slope Subarea Contingency Plan (Unified Plan, Volume II). The most current versions of the ACPs are available online at <http://www.akrrt.org/plans.shtml>. This OSRP is consistent with the NCP and the Unified Plan.

Shell's Chukchi Sea Regional Exploration Program OSRP regional applicability is based upon responding to a WCD from an exploration well with assets located near the drillship at all times during critical drilling operations into hydrocarbon-bearing zones.

This OSRP is intended as a planning document to help identify and establish the basis for Shell's oil spill prevention and recovery in the event of an oil spill and as such, by its very nature, cannot anticipate all possible contingencies. Shell plans to submit permit applications to local, state, and federal agencies containing site-specific drill site and other data in advance of drilling. Regulators with jurisdictional authority will be able to review the drilling campaign updates for a specified season and determine whether the Shell OSRP is applicable for the individual well(s). Depending on the outcome of exploration activities, Shell anticipates, in due course, to submit future applications for permits to proceed with development of its leases. Development of Shell's OCS prospects would require revision to this OSRP or a separate OSRP to address the facilities and activities related to such development.

The OSRP addresses federal oil spill planning regulations of BSEE. The WCD volume presented herein is different than that presented in Shell's EP submittal. The EP presented WCD is based on proprietary reservoir characteristics and modeling, which result in a "calculated" WCD, per NTL 10-06. The WCD presented in this OSRP for scenarios is a

“planning” volume and exceeds the daily release rate of the calculated WCD for the 30-day duration.

Objectives of the OSRP include:

- Describe Shell’s IMT.
- Assign individuals to fill positions on the IMT.
- Define the roles and responsibilities of team members.
- Define notification, activation, and mobilization procedures to be followed if a discharge occurs.
- Document equipment, manpower, and other resources available to assist with the response.
- Ensure compliance with Shell Upstream Americas Corporate Environmental Policy, Shell’s HSSE Control Framework, and Shell’s Oil Spill Manual and Specification.
- Meet the requirements of 30 CFR 254.
- Ensure consistency with the NCP and ACPs for the area of operation.

Shell recognizes the sometimes harsh conditions associated with operating in the Arctic and is prepared for and committed to preventing oil spills of any size. To achieve this goal, Shell has developed a comprehensive program which includes personnel training and the use of arctic-grade equipment to maintain primary well control and prevent discharges. The spill prevention program includes, but is not limited to the following:

- Fuel transfers will be conducted in strict accordance with USCG-approved procedures on board each vessel (see Appendix M - USCG Supplement).
- Pollution prevention equipment, maintenance, and surveillance will focus on the prevention of unauthorized discharges.
- The design of drilling procedures will ensure Shell’s ability to maintain primary well control at all times throughout drilling operations.
- Equipment utilized for secondary well control will be maintained in top condition, including functional testing and pressure testing as required.
- A weather- and ice-forecasting and monitoring program will be in place to ensure safe continued operations or, if necessary, cessation of operations and protection of personnel and assets.
- Deployment of ice management vessels and the use of dynamic ice management will protect the drilling fleet, enabling the drillship to maintain station or secure the well and move off in a timely way ensuring the safety of personnel and operations.
- Real-time operations monitoring will use state-of-the-art equipment to ensure early recognition of subsurface pressure increases and provide for a timely response to subsurface conditions.

FACILITY INFORMATION STATEMENT

Section 1.1 defines and describes facilities covered by this OSRP and includes:

- Possible drill sites;
- Leases owned by Shell in the Chukchi Sea; and
- Lease block map.

Section 1.1 also includes the service facilities of the drillship, project operations overview, and schematic diagrams of the drillship.

CONTRACT CERTIFICATION STATEMENT

Shell hereby certifies that memberships, contracts, and/or agreements are in place with ACS, ARS, AES-RO, and MSRC to provide immediate access to appropriate spill response equipment and personnel to respond to an incident. Shell also has contractual agreements for response vessels. Appendix B – Contractual Agreements presents certification of contractual agreements with these organizations.

1.1 IDENTIFICATION OF FACILITY COVERED IN THE PLAN [30 CFR 254.22(a)]

Shell has prepared this OSRP for exploration drilling operations on current and future lease holdings within the Chukchi Sea. This OSRP is one important element of Shell's overall commitment to conduct operations in a safe and environmentally sensitive manner. After personnel safety, oil spill prevention is Shell's first priority. That commitment is evident throughout Shell's plans, policies, and procedures for exploration drilling operations, as well as the many local, state, and federal permit applications that Shell has submitted, or will submit, to secure required authorizations prior to initiating the drilling program. This OSRP is specifically designed to aid Shell in preventing spills and, in the unlikely event of a spill, mitigate the impacts of that spill.

The addresses and telephone numbers of Shell for Chukchi Sea operations are provided below:

P.O. Box 576
Houston, TX 77001-0576
Telephone: (877) 273-2443

3601 C Street, Suite 1000
Anchorage, AK 99503
Telephone: (907) 770-3700

1.1.1 Location

Shell's Chukchi Sea leases are generally bounded by the following coordinates (presented in NAD 83 UTM Zone 3 system):

- 70° 15' 0" N and 71° 53' 0" N Latitude; and
- 161° 34' 0" W and 168° 50' 0" W Longitude.

Planned drilling and bottom-hole locations are on leases within the federal OCS as regulated by BSEE and all exploration activities will be conducted in compliance with applicable local, state, and federal laws.

Leases owned by Shell in the Chukchi Sea as of February 2008 are listed in Table 1.1-1. Shell's Chukchi Sea Regional Exploration Program OSRP is only for the Exploration Drilling Program and does not provide for other facilities that may be needed to support future development of its Chukchi Sea prospects.

Shell has identified six potential drill sites of interest in the Burger Prospect. The six possible drill site locations for the Exploration Drilling Program are as follows:

- Burger A - 71° 18' 30.90" N, 163° 12' 43.17" W
- Burger F - 71° 20' 13.96" N, 163° 12' 21.75" W
- Burger J - 71° 10' 24.03" N, 163° 28' 18.52" W
- Burger R - 71° 16' 06.57" N, 163° 30' 39.44" W
- Burger S - 71° 19' 25.79" N, 163° 28' 40.84" W
- Burger V - 71° 10' 33.39" N, 163° 04' 21.23" W

1.1.2 Facility Type

This OSRP addresses planned exploration drilling facilities located on Shell leases within the Chukchi Sea. The Shell leases are listed in Table 1.1-1 and depicted on Figure 1.1-1.

The following types of facilities and operations are covered by this OSRP:

- Drillships and facilities, support vessels, and related operations;
- Storage operations (including recovered oil spill fluids);
- Transfer options (including fuel and recovered oil spill fluids) involving Shell exploration and related support vessels; and
- Related support vessels.

TYPE OF FACILITY	CORPORATE NAME	BOEM ID CODE
OCS Leases	Shell Gulf of Mexico Inc.	02117

In the event that these proposed drill sites change in the course of the permitting process, Shell commits to providing updated drill site location(s) and spill trajectory(ies), as appropriate, as a revision to this OSRP.

**Table 1.1-1
 Leases Owned by Shell in the Chukchi Sea**

PROTRACTION AREA	OPD NO.	BLOCK NO.	BOEM LEASE # OCS-
COLBERT	NR03-03	6007	Y2351
COLBERT	NR03-03	6008	Y2352
COLBERT	NR03-03	6009	Y2353
COLBERT	NR03-03	6010	Y2354
COLBERT	NR03-03	6017	Y2355
COLBERT	NR03-03	6018	Y2356
COLBERT	NR03-03	6020	Y2357
COLBERT	NR03-03	6056	Y2362
COLBERT	NR03-03	6057	Y2363
COLBERT	NR03-03	6058	Y2364
COLBERT	NR03-03	6059	Y2365
COLBERT	NR03-03	6067	Y2367
COLBERT	NR03-03	6068	Y2368
COLBERT	NR03-03	6070	Y2370
COLBERT	NR03-03	6108	Y2375
COLBERT	NR03-03	6219	Y2393
COLBERT	NR03-03	6560	Y2412
COLBERT	NR03-03	6561	Y2413
COLBERT	NR03-03	6609	Y2414
COLBERT	NR03-03	6610	Y2415
COLBERT	NR03-03	6611	Y2416
COLBERT	NR03-03	6658	Y2417
COLBERT	NR03-03	6659	Y2418
COLBERT	NR03-03	6660	Y2419
COLBERT	NR03-03	6709	Y2420
COLBERT	NR03-03	6721	Y2421
COLBERT	NR03-03	6722	Y2422
COLBERT	NR03-03	6723	Y2423
COLBERT	NR03-03	6759	Y2424
COLBERT	NR03-03	6771	Y2425
COLBERT	NR03-03	6772	Y2426
COLBERT	NR03-03	6773	Y2427
COLBERT	NR03-03	6823	Y2428
HANNA SHOAL	NR04-01	6352	Y2342
HANNA SHOAL	NR04-01	6401	Y2343
HANNA SHOAL	NR04-01	6402	Y2344
HANNA SHOAL	NR04-01	6452	Y2345
HANNA SHOAL	NR04-01	6453	Y2346
HANNA SHOAL	NR04-01	6503	Y2347
HANNA SHOAL	NR04-01	6504	Y2348
HANNA SHOAL	NR04-01	6554	Y2349

**Table 1.1-1
 Leases Owned by Shell in the Chukchi Sea (Continued)**

PROTRACTION AREA	OPD NO.	BLOCK NO.	BOEM LEASE # OCS-
HANNA SHOAL	NR04-01	6604	Y2350
KARO	NR03-01	6105	Y1987
KARO	NR03-01	6106	Y1988
KARO	NR03-01	6155	Y1990
KARO	NR03-01	6156	Y1991
KARO	NR03-01	6161	Y1993
KARO	NR03-01	6162	Y1994
KARO	NR03-01	6211	Y2004
KARO	NR03-01	6212	Y2005
KARO	NR03-01	6261	Y2013
KARO	NR03-01	6363	Y2021
KARO	NR03-01	6364	Y2022
KARO	NR03-01	6413	Y2026
KARO	NR03-01	6414	Y2027
KARO	NR03-01	6415	Y2028
KARO	NR03-01	6418	Y2029
KARO	NR03-01	6419	Y2030
KARO	NR03-01	6462	Y2031
KARO	NR03-01	6463	Y2032
KARO	NR03-01	6464	Y2033
KARO	NR03-01	6465	Y2034
KARO	NR03-01	6467	Y2035
KARO	NR03-01	6468	Y2036
KARO	NR03-01	6469	Y2037
KARO	NR03-01	6512	Y2038
KARO	NR03-01	6513	Y2039
KARO	NR03-01	6514	Y2040
KARO	NR03-01	6515	Y2041
KARO	NR03-01	6516	Y2042
KARO	NR03-01	6517	Y2043
KARO	NR03-01	6518	Y2044
KARO	NR03-01	6519	Y2045
KARO	NR03-01	6562	Y2048
KARO	NR03-01	6563	Y2049
KARO	NR03-01	6564	Y2050
KARO	NR03-01	6565	Y2051
KARO	NR03-01	6567	Y2052
KARO	NR03-01	6568	Y2053
KARO	NR03-01	6569	Y2054
KARO	NR03-01	6612	Y2057
KARO	NR03-01	6613	Y2058

**Table 1.1-1
 Leases Owned by Shell in the Chukchi Sea (Continued)**

PROTRACTION AREA	OPD NO.	BLOCK NO.	BOEM LEASE # OCS-
KARO	NR03-01	6614	Y2059
KARO	NR03-01	6615	Y2060
KARO	NR03-01	6616	Y2061
KARO	NR03-01	6617	Y2062
KARO	NR03-01	6618	Y2063
KARO	NR03-01	6665	Y2066
KARO	NR03-01	6666	Y2067
KARO	NR03-01	6667	Y2068
KARO	NR03-01	6668	Y2069
KARO	NR03-01	6705	Y2072
KARO	NR03-01	6706	Y2073
KARO	NR03-01	6712	Y2074
KARO	NR03-01	6715	Y2075
KARO	NR03-01	6716	Y2076
KARO	NR03-01	6717	Y2077
KARO	NR03-01	6753	Y2080
KARO	NR03-01	6754	Y2081
KARO	NR03-01	6755	Y2082
KARO	NR03-01	6756	Y2083
KARO	NR03-01	6761	Y2084
KARO	NR03-01	6762	Y2085
KARO	NR03-01	6765	Y2086
KARO	NR03-01	6766	Y2087
KARO	NR03-01	6767	Y2088
KARO	NR03-01	6803	Y2091
KARO	NR03-01	6804	Y2092
KARO	NR03-01	6805	Y2093
KARO	NR03-01	6810	Y2094
KARO	NR03-01	6811	Y2095
KARO	NR03-01	6812	Y2096
KARO	NR03-01	6813	Y2097
KARO	NR03-01	6814	Y2098
KARO	NR03-01	6815	Y2099
KARO	NR03-01	6816	Y2100
KARO	NR03-01	6817	Y2101
KARO	NR03-01	6853	Y2104
KARO	NR03-01	6854	Y2105
KARO	NR03-01	6855	Y2106
KARO	NR03-01	6860	Y2107
KARO	NR03-01	6861	Y2108
KARO	NR03-01	6862	Y2109

**Table 1.1-1
 Leases Owned by Shell in the Chukchi Sea (Continued)**

PROTRACTION AREA	OPD NO.	BLOCK NO.	BOEM LEASE # OCS-
KARO	NR03-01	6863	Y2110
KARO	NR03-01	6864	Y2111
KARO	NR03-01	6865	Y2112
KARO	NR03-01	6866	Y2113
KARO	NR03-01	6903	Y2116
KARO	NR03-01	6904	Y2117
KARO	NR03-01	6905	Y2118
KARO	NR03-01	6908	Y2119
KARO	NR03-01	6909	Y2120
KARO	NR03-01	6910	Y2121
KARO	NR03-01	6911	Y2122
KARO	NR03-01	6912	Y2123
KARO	NR03-01	6913	Y2124
KARO	NR03-01	6914	Y2125
KARO	NR03-01	6915	Y2126
KARO	NR03-01	6916	Y2127
KARO	NR03-01	6953	Y2128
KARO	NR03-01	6954	Y2129
KARO	NR03-01	6955	Y2130
KARO	NR03-01	6956	Y2131
KARO	NR03-01	6957	Y2132
KARO	NR03-01	6958	Y2133
KARO	NR03-01	6959	Y2134
KARO	NR03-01	6960	Y2135
KARO	NR03-01	6961	Y2136
KARO	NR03-01	6962	Y2137
KARO	NR03-01	6963	Y2138
KARO	NR03-01	6964	Y2139
KARO	NR03-01	6965	Y2140
KARO	NR03-01	7006	Y2141
KARO	NR03-01	7007	Y2142
KARO	NR03-01	7008	Y2143
KARO	NR03-01	7009	Y2144
KARO	NR03-01	7010	Y2145
KARO	NR03-01	7011	Y2146
KARO	NR03-01	7012	Y2147
KARO	NR03-01	7013	Y2148
KARO	NR03-01	7014	Y2149
KARO	NR03-01	7056	Y2150
KARO	NR03-01	7057	Y2151
KARO	NR03-01	7058	Y2152

**Table 1.1-1
 Leases Owned by Shell in the Chukchi Sea (Continued)**

PROTRACTION AREA	OPD NO.	BLOCK NO.	BOEM LEASE # OCS-
KARO	NR03-01	7059	Y2153
KARO	NR03-01	7060	Y2154
KARO	NR03-01	7061	Y2155
KARO	NR03-01	7062	Y2156
KARO	NR03-01	7063	Y2157
KARO	NR03-01	7106	Y2158
KARO	NR03-01	7107	Y2159
KARO	NR03-01	7108	Y2160
KARO	NR03-01	7109	Y2161
KARO	NR03-01	7110	Y2162
KARO	NR03-01	7119	Y2163
POSEY	NR03-02	6114	Y2167
POSEY	NR03-02	6115	Y2168
POSEY	NR03-02	6161	Y2171
POSEY	NR03-02	6163	Y2172
POSEY	NR03-02	6164	Y2173
POSEY	NR03-02	6165	Y2174
POSEY	NR03-02	6213	Y2180
POSEY	NR03-02	6214	Y2181
POSEY	NR03-02	6215	Y2182
POSEY	NR03-02	6220	Y2183
POSEY	NR03-02	6259	Y2185
POSEY	NR03-02	6261	Y2187
POSEY	NR03-02	6263	Y2189
POSEY	NR03-02	6264	Y2190
POSEY	NR03-02	6265	Y2191
POSEY	NR03-02	6270	Y2192
POSEY	NR03-02	6271	Y2193
POSEY	NR03-02	6321	Y2200
POSEY	NR03-02	6322	Y2201
POSEY	NR03-02	6359	Y2204
POSEY	NR03-02	6360	Y2205
POSEY	NR03-02	6371	Y2210
POSEY	NR03-02	6372	Y2211
POSEY	NR03-02	6409	Y2212
POSEY	NR03-02	6410	Y2213
POSEY	NR03-02	6422	Y2218
POSEY	NR03-02	6423	Y2219
POSEY	NR03-02	6459	Y2220
POSEY	NR03-02	6508	Y2226
POSEY	NR03-02	6558	Y2233

**Table 1.1-1
 Leases Owned by Shell in the Chukchi Sea (Continued)**

PROTRACTION AREA	OPD NO.	BLOCK NO.	BOEM LEASE # OCS-
POSEY	NR03-02	6608	Y2241
POSEY	NR03-02	6658	Y2248
POSEY	NR03-02	6671	Y2255
POSEY	NR03-02	6672	Y2256
POSEY	NR03-02	6708	Y2261
POSEY	NR03-02	6713	Y2266
POSEY	NR03-02	6714	Y2267 ¹
POSEY	NR03-02	6715	Y2268
POSEY	NR03-02	6721	Y2269
POSEY	NR03-02	6722	Y2270
POSEY	NR03-02	6757	Y2274
POSEY	NR03-02	6761	Y2277
POSEY	NR03-02	6762	Y2278 ²
POSEY	NR03-02	6763	Y2279
POSEY	NR03-02	6764	Y2280 ³
POSEY	NR03-02	6765	Y2281
POSEY	NR03-02	6766	Y2282
POSEY	NR03-02	6771	Y2286
POSEY	NR03-02	6807	Y2290
POSEY	NR03-02	6811	Y2293
POSEY	NR03-02	6812	Y2294 ⁴
POSEY	NR03-02	6813	Y2295
POSEY	NR03-02	6814	Y2296
POSEY	NR03-02	6815	Y2297
POSEY	NR03-02	6816	Y2298
POSEY	NR03-02	6817	Y2299
POSEY	NR03-02	6856	Y2304
POSEY	NR03-02	6862	Y2308
POSEY	NR03-02	6863	Y2309
POSEY	NR03-02	6864	Y2310
POSEY	NR03-02	6865	Y2311
POSEY	NR03-02	6866	Y2312

¹ OCS Lease Block location for proposed drill site: Burger F

² OCS Lease Block location for proposed drill site: Burger S

³ OCS Lease Block location for proposed drill site: Burger A

⁴ OCS Lease Block location for proposed drill site: Burger R


**Table 1.1-1
 Leases Owned by Shell in the Chukchi Sea (Continued)**

PROTRACTION AREA	OPD NO.	BLOCK NO.	BOEM LEASE # OCS-
POSEY	NR03-02	6905	Y2317
POSEY	NR03-02	6912	Y2321 ⁵
POSEY	NR03-02	6913	Y2322
POSEY	NR03-02	6914	Y2323
POSEY	NR03-02	6915	Y2324 ⁶
POSEY	NR03-02	6916	Y2325
POSEY	NR03-02	6962	Y2334
POSEY	NR03-02	6963	Y2335
POSEY	NR03-02	6964	Y2336
POSEY	NR03-02	6965	Y2337
TISON	NR02-02	6819	Y1959
TISON	NR02-02	6820	Y1960
TISON	NR02-02	6821	Y1961
TISON	NR02-02	6822	Y1962
TISON	NR02-02	6868	Y1963
TISON	NR02-02	6869	Y1964
TISON	NR02-02	6870	Y1965
TISON	NR02-02	6871	Y1966
TISON	NR02-02	6872	Y1967
TISON	NR02-02	6918	Y1968
TISON	NR02-02	6919	Y1969
TISON	NR02-02	6920	Y1970
TISON	NR02-02	6921	Y1971
TISON	NR02-02	6922	Y1972
TISON	NR02-02	6968	Y1973
TISON	NR02-02	6969	Y1974
TISON	NR02-02	6970	Y1975
TISON	NR02-02	6971	Y1976
TISON	NR02-02	6972	Y1977
TISON	NR02-02	7018	Y1978
TISON	NR02-02	7019	Y1979
TISON	NR02-02	7020	Y1980
TISON	NR02-02	7021	Y1981
TISON	NR02-02	7022	Y1982
TISON	NR02-02	7023	Y1983
TISON	NR02-02	7068	Y1984
TISON	NR02-02	7069	Y1985
TISON	NR02-02	7072	Y1986

⁵ OCS Lease Block location for proposed drill site: Burger J

⁶ OCS Lease Block location for proposed drill site: Burger V

Figure 1.1-1 Chukchi Sea Lease Blocks April 2011

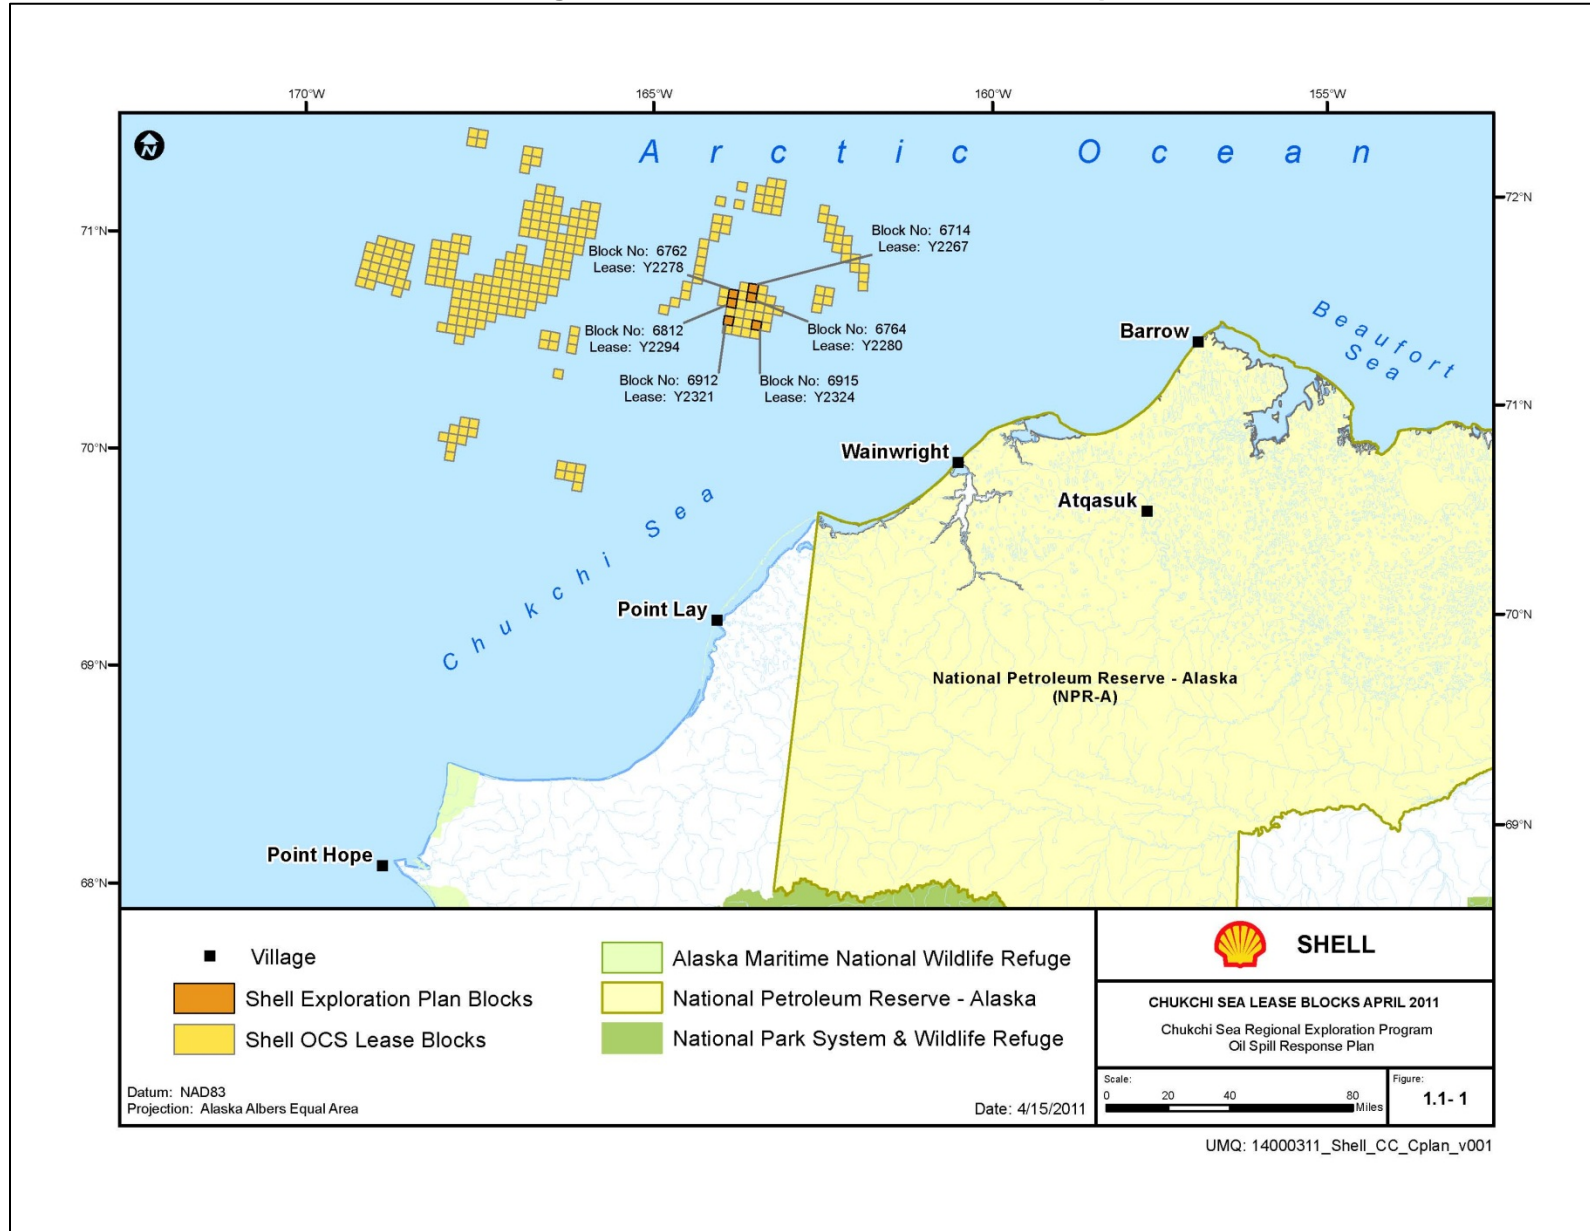

Shell intends to utilize the drillship *Discoverer*, or similar, to drill multiple wells to total depth. Exploration wells would be drilled, evaluated, and plugged and abandoned. Operations would be initiated each year following seasonal ice clearing and continue into freezeup.

The Discoverer

The *Discoverer* is a 514 ft (156 m) moored drillship with drilling equipment on a turret amidships and classified by DNV as a 1A1 Ship-Shaped Drilling Unit, winterized for service in the arctic offshore environment. It is designed for water depths ranging from 125 to 1,000 ft (38 to 305 m) and has an eight-point mooring system attached to the bottom of the turret. The drillship is equipped with thrusters, which are used to rotate around the turret, keeping the drillship bow into the weather or ice floe. The *Discoverer* drilling depth can reach a maximum of 20,000 ft (6,096 m). It can house up to 124 people. Table 1.1-2 describes the service facilities on the *Discoverer*. A facility diagram and schematics of the drillship are provided in Figures 1.1-2 through 1.1-6.

Table 1.1-2
***Discoverer* Service Facilities**

SERVICE FACILITY	DESCRIPTION
Length	514 ft (156 m)
Capacities	
Bulk Mud and Cement	1,132 bbl (180 cu m)
Sack Storage	5,845 bbl (934 cu m)
Total Liquid Mud	2,400 bbl (282 cu m)
Drilling Water	5,798 bbl (922 cu m)
Potable Water	1,670 bbl (266 cu m)
Fuel Oil	6,497 bbl (1,033 cu m)
Drilling Equipment	
Draw Works	EMSCO E-2,100, 1,600 hp
Pumps	Two (2) Continental EMSCO FB 1,800 Triple Mud Pumps
Rotary	National C-495
Derrick	IDECO 175 ft with 1,300,000 lbs nominal capacity
Blowout Prevention Equipment	
WP RAM-Type Preventers	Four 18 ¾ -inch 10,000 psi
Annular Preventers	Two 18 ¾ -inch 5,000 psi
Choke and Kill Lines	YES
Hydraulic Control Systems with Accumulator Back-up Closing	YES

Drilling Support Vessels

The drillship would be accompanied by support vessels as necessary for anchor handling, ice management, and general logistical support for the movement of supplies and personnel. Proposed support vessels are identified in Appendix A. It is Shell's intent to update information regarding specific vessels in the event that changes occur prior to each drilling season.

Oil Spill Response Support Vessels

In the event of an oil spill, Shell's primary response for the purposes of the OSRP would be conducted by the following vessels:

- OSR vessel (not more than 10 n mi from the drillship) and OSR barge (not more than 30 n mi from the drillship), stationed near the drillship while drilling into liquid hydrocarbon-bearing zones in the Chukchi Sea;

- Two VOSSs stationed within 42 hours of the drillship while drilling into liquid hydrocarbon-bearing zones;
- OSR barge, stationed within 96 hrs of the Chukchi Sea nearshore zone while the drillship is drilling into liquid hydrocarbon-bearing zones; and
- OST stationed in an area not more than 240 n mi from the Chukchi Sea drill site while drilling into liquid hydrocarbon-bearing zones. The OST would be the Arctic tanker *Affinity* or similar (70,000 gross metric tons, with a storage capacity of at least 513,000 bbl). A second Shell-chartered OST would be mobilized and arrive at the drill site by Day 20 following a spill event, as needed, with sufficient capacity to provide storage for the remaining recovered liquids for the duration of the 30-day WCD event.

Shell has chosen a conservative transit speed of 10 knots for offshore response vessel resources. Although service and maximum speeds for these vessels are significantly faster, the planning speed for response purposes has specifically been reduced to show robust response capability even in heavy sea conditions, reduced visibility, and requirement for additional power that may be necessary in the presence of ice. All major response assets are designed for and certified for operation in arctic conditions, including operation in high ice concentrations. The transit speed for the nearshore OSR barge is reduced to 5 knots to provide for similar planning considerations. Please refer to Appendix A for further information regarding general on-site vessel capabilities and, if applicable, class notations.

Fuel Systems

The fuel system of the *Discoverer* has a holding capacity of 6,500 bbl, including main bunker, emergency generator, and helicopter fuel systems. There are two fuel tanks for the helicopter, both with 17 bbl holding capacity.

Bilge Systems

The *Discoverer* bilge system consists of a network of piping and mud boxes which are connected to locations where water is likely to collect from environmental sources or natural leakage from equipment and other systems under normal operations. The bilge system is connected to two electrically driven bilge pumps located in the ship's service pump room.

The oil-water separator on the *Discoverer* is located in the propulsion room to treat effluent propulsion and forward generator room bilges.

Bulk Storage Tanks

The *Discoverer* contains integral bulk storage tanks. Non-integral bulk oil storage tanks equal to or greater than 10,000 gal will not be on-board any of the vessels.

Transfer Procedures

Fuel transfer procedures are described in Appendix M (USCG Supplement).

Response Vessel Plans and Diagrams

Response vessel plans and diagrams are presented in Appendix A (Response Equipment).

Project and Area Overview

Operations in the Chukchi Sea would begin with the drillship traveling to the Chukchi Sea accompanied by support vessels, including the OSR vessels. The vessels may arrive at the project location after July 1. The movement and positioning of the fleet is dependent on the timing and extent of breakup of the arctic sea ice.

An open water lead in the winter offshore ice is frequently created by prevailing easterly winds across the northern Chukchi Sea. This open water lead, or polynya, may be up to 30 mi (~50 km) across from shore paralleling the coast between Cape Lisburne and Point Lay. Breakup along the coast typically proceeds rapidly, changing from high ice concentration to open water in a few days. The timing of breakup is variable, ranging from early June to late July. Breakup tends to occur on the central coast one to three weeks earlier than at Point Barrow.

Project activities will commence after July 1 and continue into freezeup. When drilling in water depths of 130 ft (~40 m) or more, the environment will be dominated by open water throughout the drilling season. In midsummer, the Chukchi Sea pack ice is typically composed of a mixture of broken, eroded blocks and small floes. The edge of the ice pack is irregular and usually remains well north of the proposed operational area in the summer months. Storm events can rapidly drive multiyear floes southward at rates exceeding 7.5 mi/day (12 km/day). The fleet, consisting of the drillship and support vessels, would exit the exploration sites through the open water pathway before winter ensues and the pack ice encroaches on the shoreline.

Shell's lease area lies on the federal OCS within the Chukchi Sea approximately 60 n mi, or more, off the north coast of Alaska in the Arctic Ocean. The waters of the Chukchi Sea begin just north of the Bering Strait and extend northward to the Arctic Ocean. The predominant current in the Chukchi Sea flows northward and slightly eastward at 0.15 to 0.2 m/sec (0.3 to 0.4 knots).

The ice free or broken ice season typically extends from June through November/December. However, some portions of the Chukchi Sea are affected by sea ice all year, containing both seasonal first-year ice and thicker multiyear arctic pack ice. Several smaller fresh water rivers including the Kobuk and Noatak Rivers empty into the Chukchi Sea. Annually, the waters of the Arctic go through variations in salinity. In the summer, waters are less saline than in the winter because of river inflow and ice melt. In winter, salinity increases result from reduced fresh water inflow from river freezeup and brine rejection during ice formation (reaching as high as 34.5 ppt). In the eastern Chukchi Sea, Alaska coastal waters also flow along the coast incorporating cooler fresh water at speeds of 0.24 to 0.30 m/sec (0.5 to 0.6 knots) past Point Hope, Cape Lisburne, and Icy Cape (MMS 2007).

Tides in the Chukchi Sea are mixed semidiurnal and increase in range from 0.4 ft (0.1 m) at Barrow to up to 3 ft (1.0 m) in Kotzebue Sound. Fetch distances are significantly greater than the Beaufort Sea and wave energy levels are consequently greater. The possibility of cross-boundary impacts on Siberian waters does exist.

Predominately, the Chukchi coastal character is composed of cliffs that make up about 249 mi (400 km) of the approximately 385 mi (620 km) of total shoreline between Barrow and Point Hope. Ice-poor tundra cliffs dominate the north with bedrock cliffs exposed south of Kasegaluk Lagoon. The lowland coasts are characterized by low, sand barrier beaches and spits. Wildlife expected in the Chukchi Sea offshore exploration area includes polar bears, bowhead whales, gray whales, minke whales, fin whales, walrus, bearded seal, ringed seal, spotted seal, and marine birds.

Figure 1.1-2 Discoverer Drillship Outboard Profile Schematic

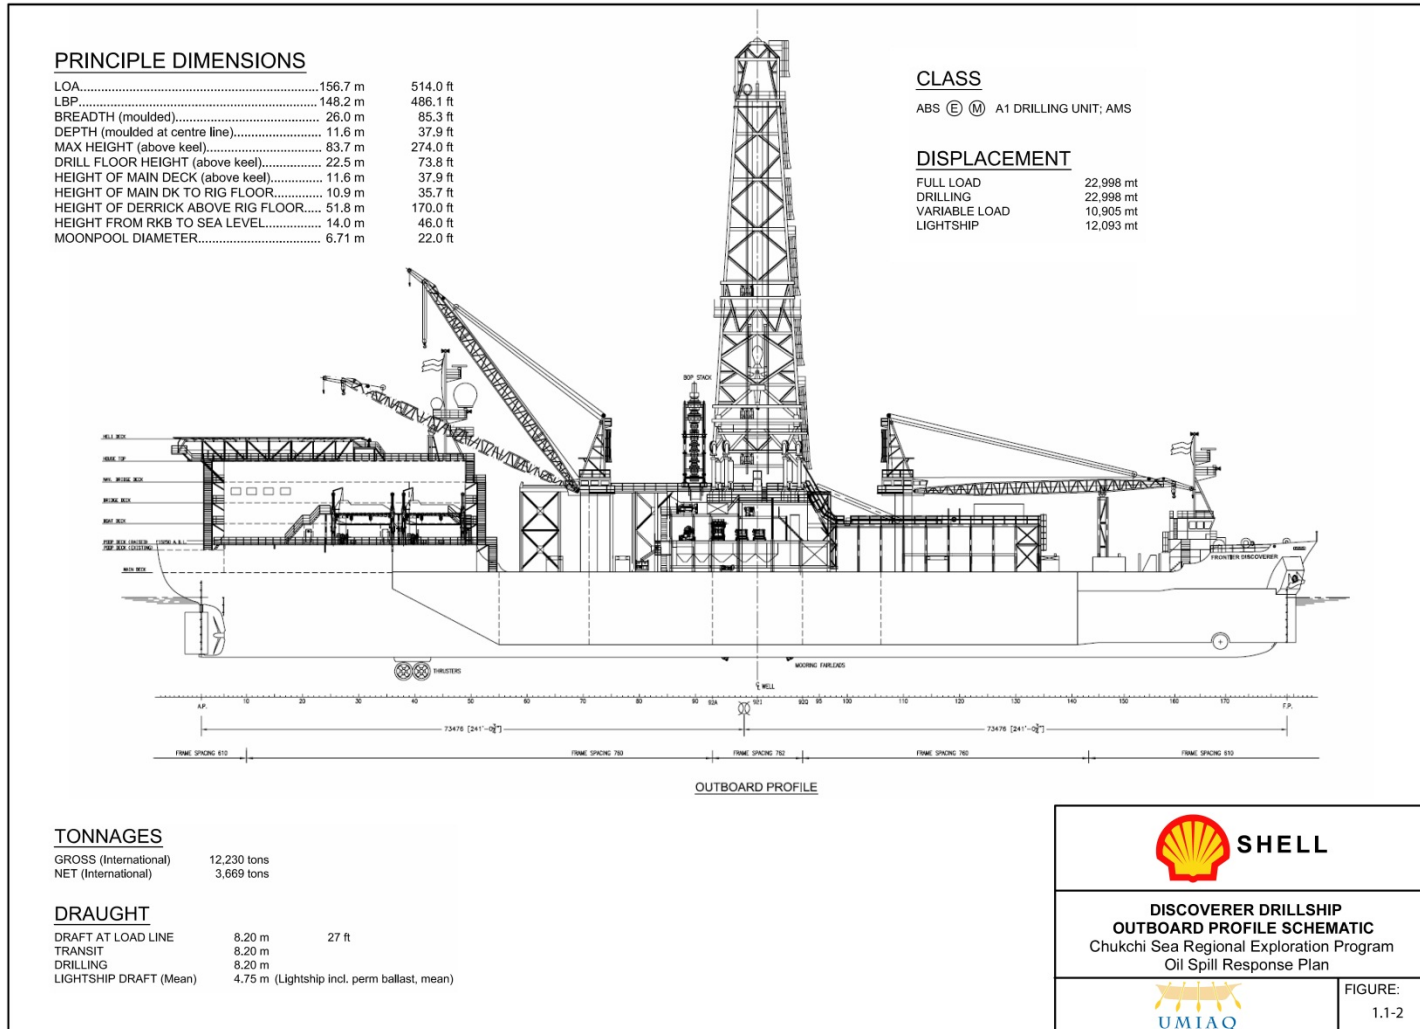


Figure 1.1-3 Discoverer Drillship Main Deck and Above Schematic

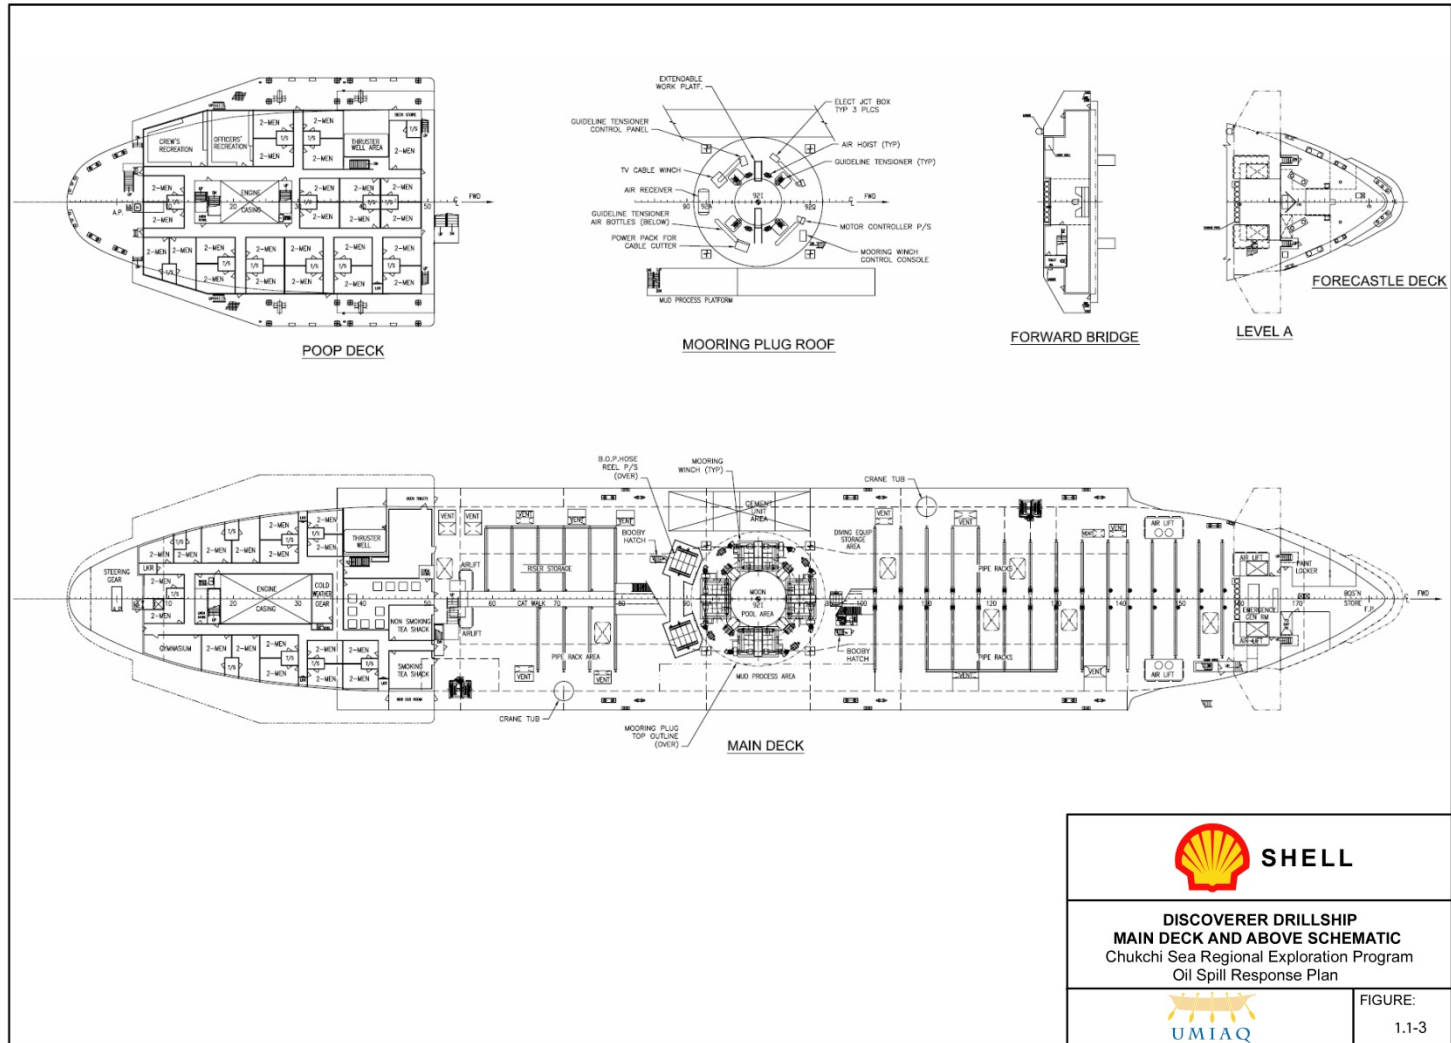


Figure 1.1-4 Discoverer Drillship Main Deck View


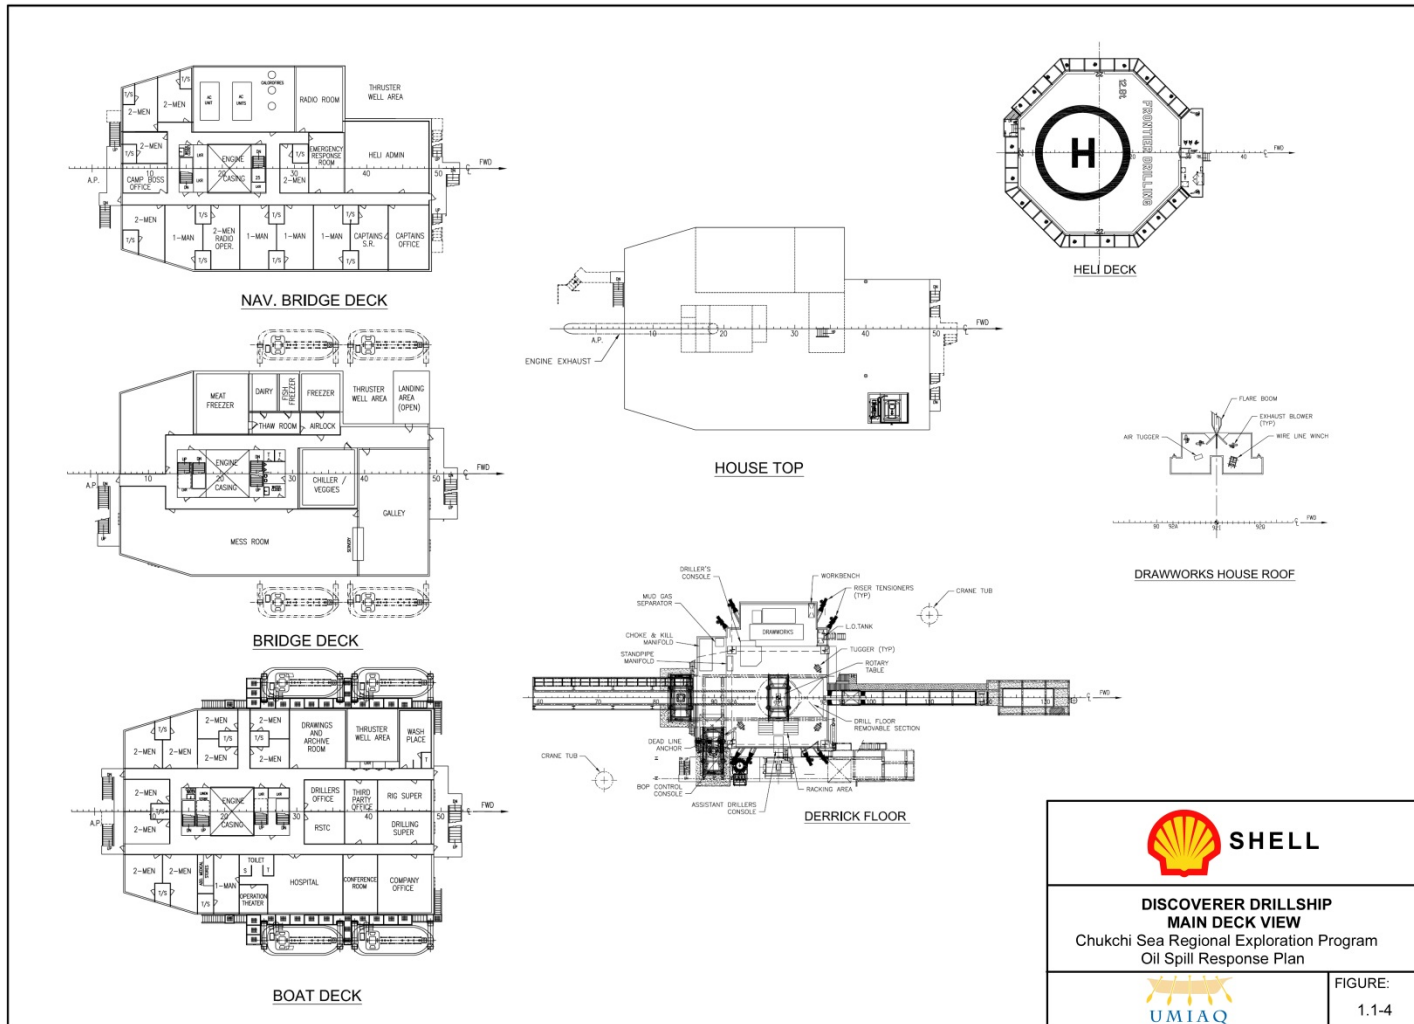


Figure 1.1-5 Discoverer Drillship Lower Deck Schematic

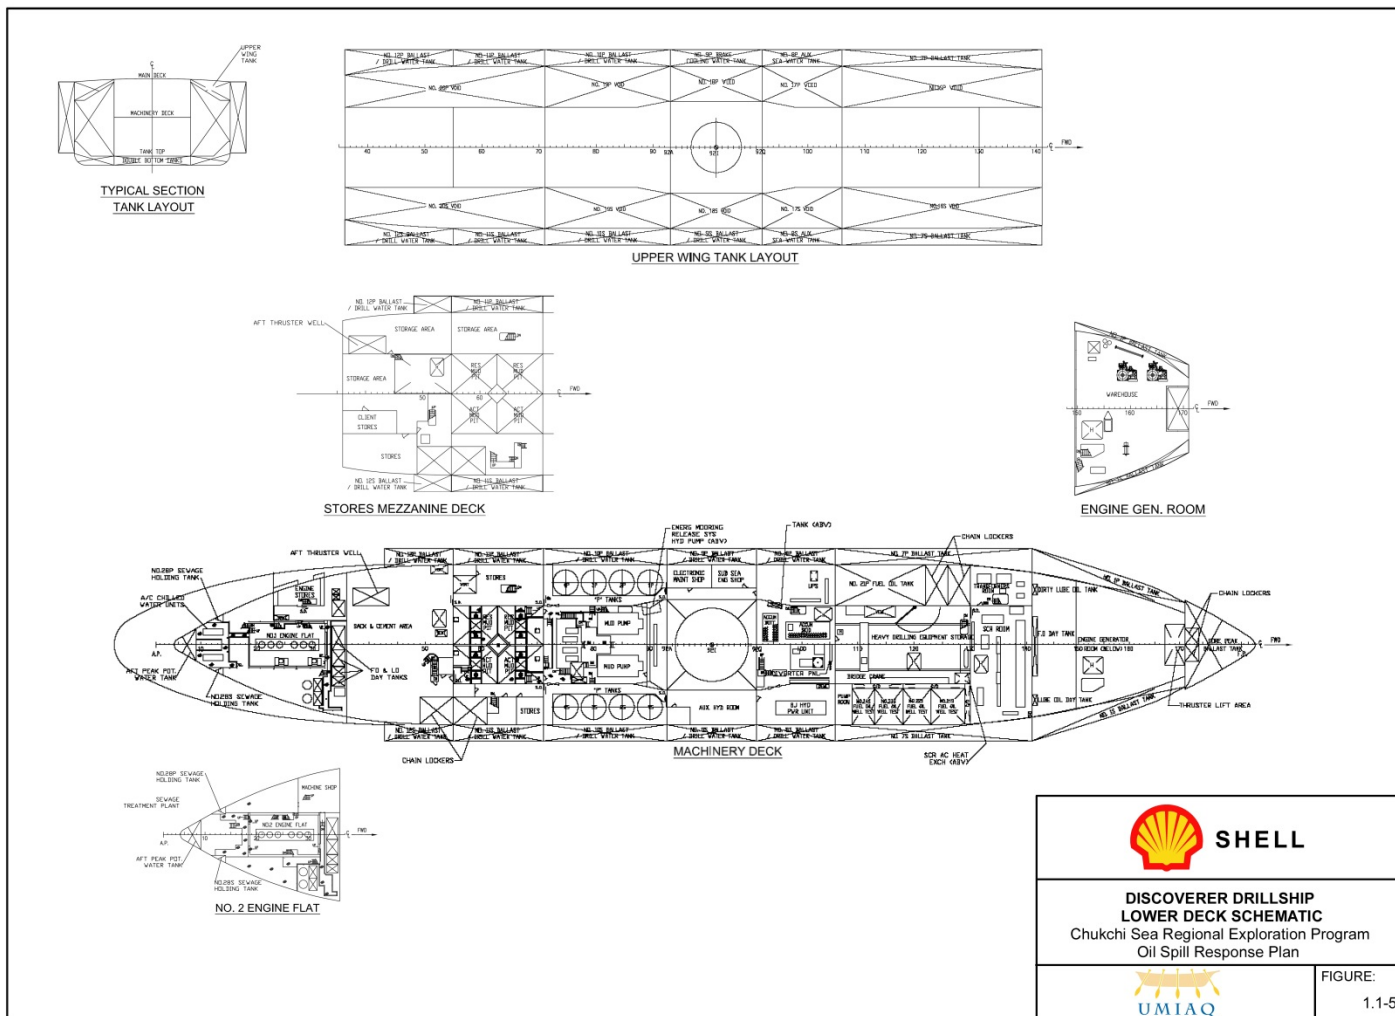

1.3 UPDATING PROCEDURES

The Emergency Response Coordinator in the Anchorage, AK office maintains this OSRP.

1. Every two years, the OSRP will be reviewed and updated as necessary to reflect personnel and telephone number changes, oil spill containment and cleanup equipment availability, and other new or changed relevant information.

STEP	ACTION
1	Review OSRP at least once every two (2) years.
2	Revise OSRP for changes in operations or organizational structure
3	Coordinate word processing publication, electronic control of document, and distribution of changes.

OSRP review opportunities also occur during response team tabletop exercises, drills, and actual emergency responses. When applicable, lessons learned from these and other Shell events shall be incorporated into the scheduled OSRP revisions.

2. Agency Revision Requirements – The BSEE Chief, OSRD, will periodically review the equipment inventories of Shell’s OSROs to ensure that sufficient spill response equipment is available to meet the cumulative needs of the owners and operators who cite these organizations in their plans. OSRP revisions are performed per 30 CFR 254 as follows:

IF	THEN
A change occurs which significantly reduces your response capabilities.	The Facility must submit revised portions of the OSRP to BSEE Chief, OSRD, within 15 days.
A significant change occurs in the WCD scenario or in the type of oil being handled, stored, or transported at the Facility.	
There is a change in the name(s) or capabilities of the oil spill removal organizations cited in the OSRP.	
There is a significant change to the ACP	
OSRP has become outdated.	The BSEE Chief, OSRD, may require you to re-submit your OSRP.
Numerous revisions have made use of the OSRP difficult.	
If significant inadequacies are indicated by: <ul style="list-style-type: none"> • Periodic reviews. • Information obtained during drills or actual spill responses. • Other relevant information the Regional Supervisor obtained. 	The BSEE Chief, OSRD, may require you to revise your OSRP.

Submission of Revisions – Shell must:

STEP	ACTION
1	Review OSRP at least once every two (2) years.
2	Submit all modifications to the BSEE Chief, OSRD.
3	Notify BSEE Regional Supervisor in writing if there are no modifications.

3. Suggestions for corrections and modifications are solicited from all users of the OSRP and should be submitted directly to Curtis Wright, Shell, 3601 C Street, Suite 1000, Anchorage, AK 99503 (907) 770-3700.
4. Changes to legislative and regulatory requirements are tracked by Shell. These changes are communicated to relevant personnel and, when required, the OSRP is revised to maintain compliance.
5. Modifications to the OSRP will be submitted to the BSEE Chief, OSRD, for Field Operations review and approval.
6. Updated materials will also be communicated to holders of the OSRP via cover letter or email that will instruct the holder to remove "obsolete pages" from the plan and replace them with the appropriate revised pages.

The **OSRP holder**, immediately upon receipt of revisions, shall:

STEP	ACTION
1	Review and insert revised pages into the Plan.
2	Discard the obsolete pages.

These revisions will be recorded on the Record of Revisions Table (Section 1.2).

7. The Emergency Response Coordinator shall have the responsibility for distribution of the OSRP. Distribution will be handled in the following manner:
- Company personnel who respond to a discharge event will have access to a copy of the OSRP.
 - Any person holding a copy of the OSRP will transfer that copy to their replacement.
 - Various regulatory agencies will also be distributed a copy of the OSRP.

1.4 ACRONYMS AND ABBREVIATIONS

The list in Table 1.4-1 addresses all acronyms and abbreviations used in the OSRP including the Quick Guide and Appendices. The acronyms and abbreviations are defined only here and are not spelled out elsewhere in the document. This approach allows the reader to quickly refer to a list, rather than search for the first appearance in the document where the acronym is defined.

**Table 1.4-1
 Acronyms and Abbreviations**

9500	COREXIT® EC 9500A
A.....	Casual/Accidental
AAC.....	Alaska Administrative Code
ABR.....	ABR Inc. Environmental Research & Services
ACP.....	Area Contingency Plan
ACS.....	Alaska Clean Seas
ACS Tactic(s).....	tactics in <i>ACS Technical Manual, Volume I, Tactics Description</i>
ACS Technical Manual	<i>ACS Technical Manual, Volume I (Tactics Description), Volume II (Map Atlas)</i>
ACRT	Auxiliary Contract Response Team
ADDS	Applied Aerial Dispersant System
ADEC	Alaska Department of Environmental Conservation
ADF&G.....	Alaska Department of Fish and Game
ADNR.....	Alaska Department of Natural Resources
AES	ASRC Energy Services
AES-RTS	ASRC Energy Services – Regulatory and Technical Services
AES-RO	ASRC Energy Services – Response Operations, LLC
AEWC	Alaska Eskimo Whaling Commission
AIMS	Alaska Incident Management System
ALSF2	Approach Lighting System with Sequenced Flashers II
AM.....	An amendment (a change to a Regional OSRP pending approval) or amplitude modulation
ANC.....	Anchorage
ANS.....	Alaska North Slope
AOGCC	Alaska Oil and Gas Conservation Commission
APD.....	Application for Permit to Drill
API	American Petroleum Institute
APICOM.....	Association of Petroleum Industry Co-op Managers
ARRT	Alaska Regional Response Team
ARS.....	UIC Arctic Response Services, LLC
AS	Alaska Statute
ASA.....	Applied Science Associates, Inc.
ASI	Airborne Support, Inc.
ASRC	Arctic Slope Regional Corporation
ASTM	American Society for Testing and Materials
ATV	all-terrain vehicle
AU	Annual Update
BAT	Best Available Technology
bbbl	barrel(s)
BD	Branch Director
BHP.....	brake horse power

BI.....	Biennial Update
BLM.....	U.S. Department of the Interior, Bureau of Land Management
BMPs.....	best management practices
BOEM.....	U.S. Department of the Interior, Bureau of Ocean Energy Management
BOP.....	Blowout Preventer
bopd.....	barrels of oil per day
BOPE.....	Blowout Prevention Equipment
boph.....	barrels of oil per hour
BPXA.....	BP Exploration (Alaska) Inc.
BRW.....	Barrow
BSEE.....	U.S. Department of the Interior, Bureau of Safety and Environmental Enforcement
°C.....	degrees Centigrade
CAA.....	Conflict Avoidance Agreement
CD.....	compact disk
CFR.....	Code of Federal Regulations
CISPRI.....	Cook Inlet Spill Response, Inc.
cm.....	centimeter
CMT.....	Crisis Management Team
CO ₂	carbon dioxide
COCP.....	Critical Operations and Curtailment Plan
COTP.....	Captain of the Port
CPAI.....	ConocoPhillips Alaska Inc.
CRF.....	Contingency Response Facility
cSt.....	centiStoke(s)
cu m.....	cubic meters
cu m/hr.....	cubic meter per hour
DB.....	diving bird
DIC.....	Deputy Incident Commander
<i>Discoverer</i>	drillship Noble <i>Discoverer</i>
DNV.....	Det Norske Veritas
DOI.....	U.S. Department of the Interior
DOI-OEPC.....	Department of Interior, Office of Environmental Policy and Compliance
DOR.....	dispersant-to-oil ratio
DOT.....	U.S. Department of Transportation
DVD.....	Digital Versatile Disk
DWOP.....	Drill-the-Well-on-Paper
E.....	east
EDRC.....	effective daily recovery capacities
EMS.....	Emergency Shutdown
EMT.....	Emergency Medical Technician
ENE.....	east-northeast
EP.....	Exploration Plan
EPA.....	U.S. Environmental Protection Agency

EPW	Exploration and Production - West
ERC.....	Emergency Response Coordinator
ERM	Environmental Resource Management
ERP.....	Emergency Response Plan
ERT.....	Emergency Response Team
ES	Endangered Species
ESA.....	Environmentally Sensitive Area
ESD.....	Emergency Shut Down
ESI	Environmental Sensitivity Index
ETA	estimated time of arrival
EU	Environmental Unit
Everts.....	Everts Air Cargo
°F.....	degrees Fahrenheit
FAA	Federal Aviation Administration
fax	facsimile
FEIS	Final Environmental Impact Statement
FLIR	forward-looking infrared radar
FM.....	Frequency Modulation
FOSC.....	Federal On-Scene Coordinator
ft	foot/feet
FTW	fitness to work
FW.....	fixed wing
gal	gallon(s)
GIS.....	Geographic Information System
GMDSS.....	Global Maritime Distress and Safety System
gpd	gallon(s) per day
gph	gallons per hour
gpm	gallons per minute
GPS.....	Global Positioning System
H ₂ S.....	hydrogen sulfide
HAZCOM	hazard communication
HAZWOPER	Hazardous Waste Operations and Emergency Response
HDPE.....	high-density polyethylene
HERC.....	Hercules (C-130 aircraft)
HF	high frequency
hp	horsepower
hr.....	hour(s)
HSE.....	Health, Safety and Environment
HSSE	Health, Safety, Security, and Environment
HT	Hazard Time
Hz.....	hertz
IA.....	Ice Advisor
IAP	Incident Action Plan
IAR	International Air Response

IBRRC	International Bird Rescue and Rehabilitation Center
IC	Incident Commander
ICP	Incident Command Post
ICS	Incident Command System
ID	inside diameter
IFR	Instrument Flight Rules
IMO	International Maritime Organization
IMP	Ice Management Plan
IMT	Incident Management Team
IR	infrared
IRIC	Initial Response Incident Commander
ISB	<i>in situ</i> burning
ISO	International Organization for Standardization
IWC	Ice and Weather Information Center
kbps	kilobits per second
km	kilometer(s)
km/day	kilometers per day
kph	kilometers per hour
Ku	Kurtz-under
kW	kilowatt
lb/lbs	pound/pounds
L/T	Level/Temperature
LEL	Lower Explosive Limit
LGL	LGL Limited
LMRP	Lower Marine Riser Package
LOA	Letter of Authorization
LOSC	Local On-Scene Coordinator
LRB	Lamor Recovery Bucket (skimmer)
LS	level sensors
m	meter(s)
m/sec	meters per second
MAD	Mutual Aid Drill
MALSR	Medium-Intensity Approach Lighting System with Runway Alignment Indicator
MARPOL	International Convention for the Prevention of Pollution from Ships, 1973, as modified by the Protocol of 1978
MAWP	Maximum Anticipated Wellhead Pressure
MBTA	Migratory Bird Treaty Act
mcf	million cubic feet
MD	A modification (a change to an approved Regional OSRP)
MESA	Most Environmentally Sensitive Area
MHz	megahertz
mi	mile(s)
min	minute(s)

MLC.....	mudline cellar
mm	millimeter
MMPA	Marine Mammal Protection Act
MMPD	Maximum Most Probable Discharge
mm/min	millimeter per minute
MMS.....	U.S. Department of the Interior, Minerals Management Service
mmscf/d	million standard cubic feet per day
MOB	mobilize/mobilization
MODIS	moderate-resolution imaging spectroradiometer
MODU	Mobile Offshore Drilling Unit
MOU.....	Memorandum of Understanding
mph	mile(s) per hour
MSA	Master Service Agreement
MSAT	Mobile Satellite System
MSDS.....	Material Safety Data Sheet
MSRC.....	Marine Spill Response Corporation
MSV	Multi-Purpose Support Vessel
MT.....	Move-Off Time
MWD	Measurement-While-Drilling
M/V	Motor Vessel
N.....	north
NAC.....	Northern Air Cargo
NASA	National Aeronautics and Space Administration
NCP.....	National Contingency Plan
NDB.....	Non-Directional Radio Beacon
NE	northeast
NGO	Non-Government Organization
NIMS	National Incident Management System
NMFS.....	National Marine Fisheries Service
nm/n mi	nautical mile(s)
NNE.....	north-northeast
NOAA.....	National Oceanic and Atmospheric Administration
NOFO.....	Norwegian Clean Seas Association for Operating Companies
North Slope Atlas	Sensitivity of Coastal Environments and Wildlife to Spilled Oil, North Slope, Alaska Map Atlas
NPIAS	National Plan of Integrated Airport System
NPR-A.....	National Petroleum Reserve – Alaska
NPREP	National Preparedness for Response Exercise Program
NRC	National Response Center
NRDA.....	Natural Resources Damage Assessment
NSB.....	North Slope Borough
NSSAWG	North Slope Sensitive Areas Work Group
NSSRT	North Slope Spill Response Team
NSTC	North Slope Training Cooperative

NTL	Notice to Leasees
NW	northwest
O	pelagic
O'Brien's	O'Brien's Response Management Inc.
OCS	Outer Continental Shelf
ODALS	Omnidirectional Approach Lighting System
ODPCP	Oil Discharge Prevention and Contingency Plan
OEPC	U.S. Department of the Interior, Office of Environmental Policy and Compliance
OIM	Offshore Installation Manager
OPA 90	Oil Pollution Act of 1990
OSC	On-Scene Commander
OSHA	Occupational Safety and Health Administration
OSR	Oil Spill Response
OSRD	Oil Spill Response Division
OSRL	Oil Spill Response Limited
OSRO	Oil Spill Removal Organization
OSRP	Oil Spill Response Plan
OSV	Offshore Supply Vessel
OST	Oil Storage Tanker
p	page
P	present
PENCO	Pacific Environmental Corporation
PIC	person in charge
PM	Primary Maintenance
PPE	personal protective equipment
PPS	Priority Protection Site
ppt	parts per thousand
PRAC	Primary Response Action Contractor
PREP	Preparedness for Response Exercise Program
psi	pounds per square inch
PSO	Protected Species Observer
PWD	Pressure-While-Drilling
QI	Qualified Individual
R	Rare
RA	raptor
RAR	Rig Anchor Release
RCRA	Resource Conservation and Recovery Act
ROV	remotely operated vehicle
RP	Responsible Party
RPS	Response Planning Standard
RQ	reportable quantity
RTOC	Real Time Operations Center
RTTI	Real Time Tracking Information

RW	rotary wing
S	Subsistence Species
SAR	Synthetic Aperture Radar or Search-and-Rescue
SART	Shell Americas Response Team
SCAT	Shoreline Cleanup Assessment Technology
SD	Shell Drilling
SE	seabird
sec	second(s)
SEPCO	Shell Exploration and Production Company
SERVS	Ship Escort Response Vessel System
SH	diving bird
Shell	Shell Gulf of Mexico Inc.
Shell Tactic(s)	Tactics in <i>Shell Beaufort and Chukchi Seas regional Tactics Manual</i>
Shell Tactics Manual	<i>Shell Beaufort and Chukchi Seas Regional Tactics Manual</i>
SHPO	State Historic Preservation Officer
SIMOPS	Simultaneous Operations
Sm	sea miles
SMART	Special Monitoring of Applied Response Technologies
SMC	Special Management Concern
SOLAS	International Convention for the Safety of Life at Sea
SOSC	State On-Scene Coordinator
SPCC	Spill, Prevention, Control, and Countermeasure
SPCO	State Pipeline Coordinator's Office
SRT	Spill Response Team
SSB	Single Sideband
SSHP	Site Safety and Health Plan
ST	Secure Time
SW	southwest
t	ton(s)
TF	Task Force
TRG	The Response Group
TS	Threatened Species
T-Time	total time to secure well and leave location
TVD	true vertical depth
U	uncommon
UA	Upstream Americas
UB	upland bird
UC	Unified Command
UHF	ultra-high frequency
UIC	Ukpeaġvik Iñupiat Corporation
ULD	unit loading devices

Unified Plan.....	Alaska Federal and State Preparedness Plan for Response to Oil and Hazardous Substance Discharges and Releases
USACE.....	U.S. Army Corps of Engineers
USCG.....	U.S. Coast Guard
USFWS.....	U.S. Fish and Wildlife Service
VCR.....	videocassette recorder
VFR.....	Visual Flight Rules
VHF.....	very high frequency
VMT.....	Vessel Management Team
VOR.....	Very High Frequency Omnidirectional Range
VOSS.....	Vessel of Opportunity Skimming System
VRT.....	Village Response Team
VSAT.....	Very Small Aperture Terminal
W.....	west
WAN.....	Wide Area Network
WBS.....	Web-based system
WCC.....	Woodward-Clyde Consultants
WCCP.....	Well Control Contingency Plan
WCD.....	worst case discharge
WF.....	waterfowl
WNW.....	west-northwest
WP.....	working pressure
WRP.....	Wildlife Response Plan

THIS PAGE
INTENTIONALLY
LEFT BLANK

TABLE OF CONTENTS

PART 2 – EMERGENCY RESPONSE ACTION PLAN.....	2-1
2.1 QUALIFIED INDIVIDUAL DESIGNATION [30 CFR 254.23(a)]	2-1
2.2 INCIDENT MANAGEMENT TEAM DESIGNATION [30 CFR 254.23(b)]	2-1
2.3 SPILL RESPONSE OPERATING TEAM [30 CFR 254.23(c)]	2-9
2.3.1 Trained and Available on 24-hour Basis.....	2-9
2.3.2 Spill Response Coordinator and Alternate(s)	2-9
2.4 SPILL RESPONSE OPERATIONS CENTER (INCIDENT COMMAND POST) AND COMMUNICATIONS [30 CFR 254.23(d)]	2-10
2.4.1 Incident Command Post.....	2-10
2.4.2 Communications Plan	2-12
2.4.3 Communications Equipment	2-12
2.4.3.1 Drillship Communication	2-14
2.4.3.2 Intercom System.....	2-15
2.4.3.3 Page and Alarm System	2-15
2.4.3.4 Communication and Navigation Equipment, <i>Discoverer</i>	2-15
2.4.3.5 Patch Number 1 and Patch Number 2	2-16
2.4.4 Equipment Maintenance	2-16
2.5 LISTING OF TYPES AND CHARACTERISTICS OF OIL HANDLED/ STORED/ TRANSPORTED AT FACILITY [30 CFR 254.23(e)]	2-16
2.6 PROCEDURES FOR EARLY DETECTION OF A SPILL [30 CFR 254.23(f)].....	2-17
2.6.1 Drillship Integrity Inspections	2-17
2.6.2 Drilling Operations	2-17
2.6.3 Automated Methods.....	2-18
2.7 RESPONSE PROCEDURES [30 CFR 254.23(g)]	2-19
2.7.1 Spill Notification Procedures [30 CFR 254.23(g)(1)].....	2-19
2.7.1.1 Initial Reporting.....	2-21
2.7.1.2 External Notification Procedures.....	2-28
2.7.1.3 Written Reporting Requirements.....	2-28
2.7.2 Spill Assessment [30 CFR 254.23(g)(2)].....	2-31
2.7.3 Sensitive Areas [30 CFR 254.23(g)(3)]	2-32
2.7.4 Resource Protection Methods [30 CFR 254.23(g)(4)]	2-40
2.7.5 Response Asset Mobilization, Deployment, and Support [30 CFR 254.23(g)(5)].....	2-42
2.7.6 Procedures to Ensure Sufficient Recovered Oil Storage for Continued Recovery Operations [30 CFR 254.23(g)(6)].....	2-45
2.7.7 Procedures to Remove Oil and Oiled Debris from Shallow Waters and Along Shorelines and Rehabilitate Oiled Waterfowl [30 CFR 254.23(g)(7)]	2-46
2.7.8 Procedures to Store, Transfer, and Dispose of Recovered Oil and Oil- Contaminated Materials [30 CFR 254.23(g)(8)].....	2-54
2.7.9 Methods to Implement Dispersant Use and <i>In Situ</i> Burn Plans [30 CFR 254.23(g)(9)].....	2-56
2.7.9.1 Dispersants.....	2-56
2.7.9.2 <i>In Situ</i> Burning	2-57

FIGURES

Figure 2.2-1 Incident Command System	2-3
Figure 2.4.1-1 Anchorage Command Center.....	2-10
Figure 2.4.1-2 Shell Staging Areas.....	2-11
Figure 2.7.1-1 Internal Emergency Notification Process Diagram	2-23
Figure 2.7.1-2 Shell Report of Offshore Environmental Incident Form.....	2-26
Figure 2.7.3-1 Chukchi Sea Shoreline Protection ACS Map Atlas Sheet Index	2-39
Figure 2.7.7-1 Shoreline Containment and Protection	2-51
Figure 2.7.7-2 Shoreline Containment and Recovery Operations.....	2-51
Figure 2.7.7-3 Shoreline Cleanup and Backwater Protection	2-52
Figure 2.7.7-4 Nearshore Diversion and Recovery of Oil	2-52
Figure 2.7.7-5 Nearshore Recovery in Broken Ice.....	2-53
Figure 2.7.7-6 Nearshore Ignition of Oil In Ice	2-53

TABLES

Table 2.2-1 IMT Contact Information.....	2-4
Table 2.2-2 IMT Responsibilities and Checklist.....	2-6
Table 2.4.3-1 Summary of Alaska Statewide Frequency Plan Channels	2-13
Table 2.7.1-1 Emergency Action Checklist.....	2-20
Table 2.7.1-2 Initial Spill Response and Notification Process – Tier I Spill	2-21
Table 2.7.1-3 Initial Spill Response and Notification Process – Tier II or Tier III Spill	2-22
Table 2.7.1-4 Emergency Contact List	2-24
Table 2.7.1-5 Agency and External Notification Information	2-25
Table 2.7.1-6 Agency Reporting Requirements for Oil Spills	2-29
Table 2.7.2-1 Spill Assessment Tactics References.....	2-31
Table 2.7.3-1 Sensitive Area Prioritization Tactics References	2-32
Table 2.7.3-2 Shoreline Protection Assessment for Point Barrow to Cape Lisburne.....	2-35
Table 2.7.3-3 Site-Specific Environmental Assessment Agency Consultation List.....	2-38
Table 2.7.4-1 Sensitive Area Protection Tactics Reference.....	2-40
Table 2.7.5-1 Equipment Mobilization and Deployment (Logistics) Tactics References	2-42
Table 2.7.5-2 Transportation Options.....	2-44
Table 2.7.6-1 Storage Equipment for Recovery Operations	2-45
Table 2.7.7-1 Offshore Recovery Summer Conditions Tactic References	2-46
Table 2.7.7-2 Offshore Recovery in Varying Ice Conditions Tactic References	2-47
Table 2.7.7-3 Nearshore Response Tactics References	2-48
Table 2.7.8-1 Storage, Transfer, and Disposal Tactics References.....	2-54
Table 2.7.8-2 Onshore Waste Disposal Facilities and Disposal Methods	2-55
Table 2.7.9-1 Dispersant Tactics References.....	2-56
Table 2.7.9-2 <i>In Situ</i> Burning Tactics References	2-57

PART 2 – EMERGENCY RESPONSE ACTION PLAN

2.1 QUALIFIED INDIVIDUAL DESIGNATION [30 CFR 254.23(a)]

The QI and QI Alternate contact information is presented below. These individuals have full authority to implement removal actions and ensure immediate notification of appropriate federal officials and response personnel. Shell’s IC is also identified as the primary QI as defined in OPA 90 and has the responsibility and authority to initiate spill cleanup operations, obligate funds to carry out response activities, implement response actions, and immediately notify appropriate federal officials and response organizations and act as liaison with the pre-designated FOSC.

Incident Commander / Qualified Individual

Position / Name	Office	Cell
Primary: Buddy Custard	907-771-7206	[REDACTED]
Alternates:		
Susan Childs	907-646-7112	[REDACTED]
Sean Churchfield	907-771-7217	[REDACTED]

2.2 INCIDENT MANAGEMENT TEAM DESIGNATION [30 CFR 254.23(b)]

For the purposes of this OSRP, the Spill Management Team, as referenced in 30 CFR 254.23a, is referred to as the IMT. Shell’s trained IMT members are available to fill IMT positions on a 24-hour basis.

Shell’s incident management organization structure is based on the NIMS. This system provides a clear definition of roles, chain-of-command, and has the flexibility for expansion or reduction of the organization as needed to address incident-specific conditions. Shell’s *Incident Management Handbook* is followed for the process, organization, and language for incident response management.

All emergency response situations would use the ICS. The ICS defines roles and lines of command, together with the flexibility for expansion of the organization as necessary. The first person discovering or responding to any emergency situation becomes the On-Scene IC until that individual relinquishes authority to another person better able to assess the situation.

In most Tier I incidents, the on-site spill technicians possess the capabilities to effectively control the incident. The on-site Shell company representative may fulfill the role of IC. Personnel would be activated to standby until an assessment is performed. Once the assessment is complete, response personnel are either released or mobilized to the incident location.

For Tier I incidents, drillship personnel would report to a designated secure area until completion of an incident assessment by the on-site representative. Following that assessment, the drillship personnel would be assigned cleanup duties based on their level of training. A spill response technician would be mobilized to assist in this effort as necessary.

Tier II/III responses are initiated by the Drilling Foreman who activates the appropriate IMT(s). Once the response level is ascertained, the appropriate IMT(s) begin(s) to provide support to the field responders (Operations Section) and to coordinate the collection and distribution of information. Shell and their response contractor provide personnel and equipment resources from the on-site OSR vessel, VOSS, and North Slope resources.

For Tier II/III incidents, the Drilling Foreman is the initial On-Scene IC. The drillship personnel may be directed to a secure area to await the arrival of emergency response personnel.

Depending on the incident, drillship personnel may be incorporated into the IMT, when applicable.

Upon notification, the QI would ensure activation of the IMT (Tier II or Tier III response). Through the use of an automated system (such as the MIR3 System), Shell may broadcast an “all call” to activate IMT personnel. An IMT personnel list is kept up to the date and shared with the IMT by the Emergency Response Coordinator that includes all telephone, email, and other contact information for members of the IMT. During Tier II events, the response contractor provides personnel and equipment. During Tier III events, the QI acts as the company representative for commitment of additional resources. The QI can be either the IC or the DIC. Tier II or Tier III incidents would normally be managed from the ICP located in Shell’s offices at 3601 C Street, Suite 1000, Anchorage, Alaska. Forward command posts could be established on the drillship, at Barrow, and/or at Wainwright, as necessary.

For significant oil spills of Tier II and Tier III magnitude, there may be FOOSC, SOOSC, and LOOSC participation alongside the Shell IC. These individuals may become part of the UC, representing their organization. Each may contribute to the process of:

- determining and establishing overall incident objectives and priorities;
- selecting strategies;
- approval of tactical activities;
- conducting integrated tactical operations; and
- using resources effectively and efficiently.

The RP would fill the role of IC in the UC structure unless the FOOSC determines the RP’s response is inadequate. In such a circumstance, the FOOSC would assume the role of IC.


Shell’s IMT correlates with the “spill management team” designated in 30 CFR 254.23(b). Shell’s IMT would define the spill response tactics and provide overall support to the Operation’s field spill response technicians to meet the incident-specific objectives. The level of “ramp-up” and activation of IMT staffing is scaled depending on the severity of the incident. Shell intends to integrate IMT staff with federal, state and local representatives to establish a UC.

An organization chart showing the ICS structure is presented in Figure 2.2-1. The individuals that would comprise the Shell IMT are listed in Table 2.2-1. Responsibilities of the IMT members are described in Table 2.2-2.

Although this OSRP contains procedures applicable to most foreseeable spill scenarios, actual conditions and decisions by the UC will dictate whether deviations from the OSRP are appropriate. IMT members are instructed to act accordingly, as directed by the UC.

**Figure 2.2-1
 Incident Command System**

Tier II and Tier III Incident Response
 Organization Chart

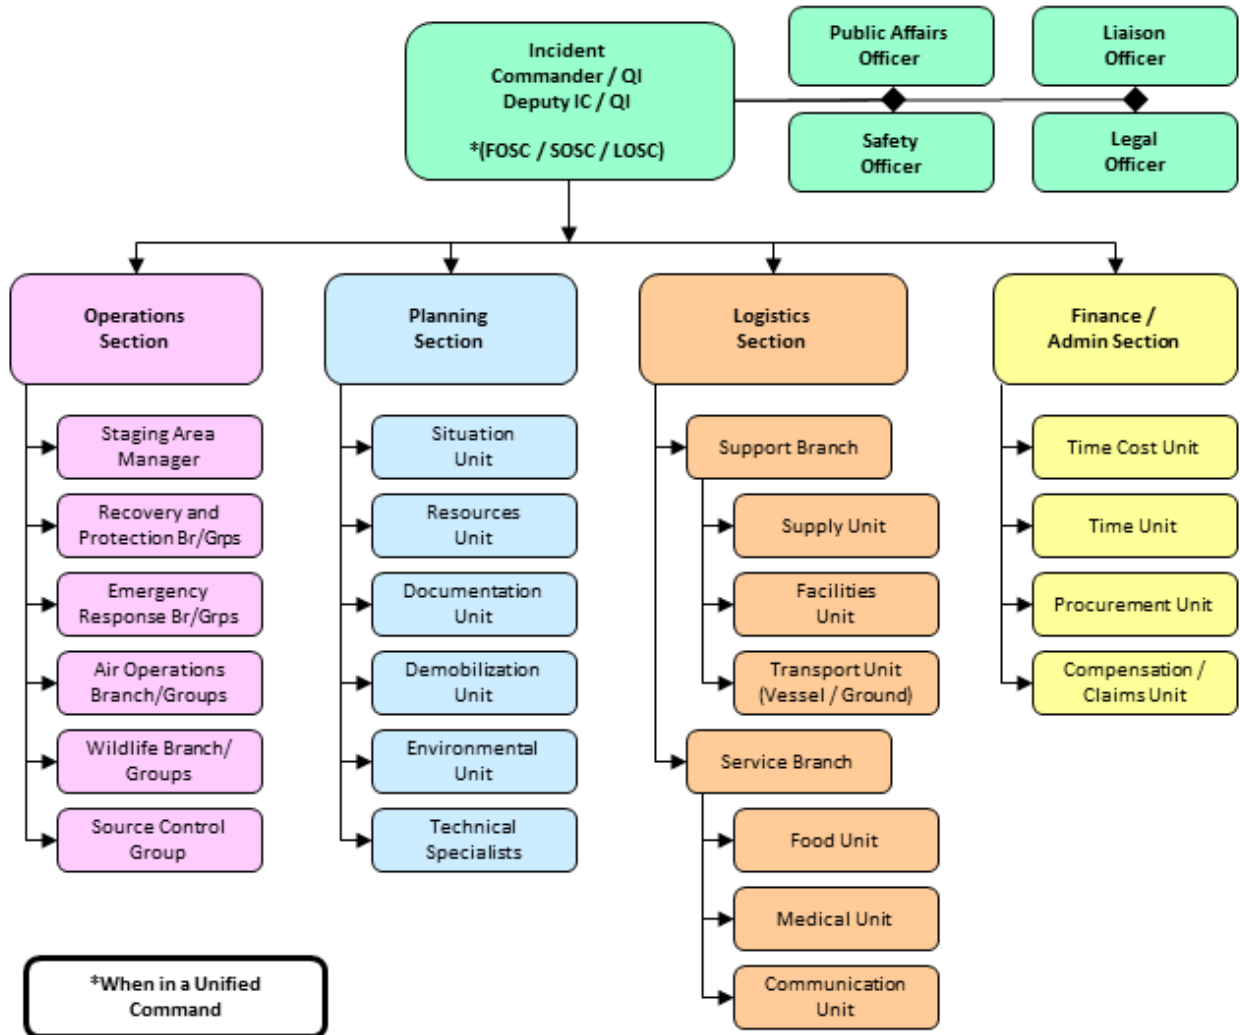

The functional responsibilities of the positions identified in Figure 2.2-1 are consistent with those identified in the NIMS and further defined within the USCG Incident Management Handbook.

**Table 2.2-1
 IMT Contact Information**

NAME	OFFICE #	PAGER #	CELL #
COMMAND STAFF			
IC/QI			
Buddy Custard	907-771-7206		██████████
Deputy IC /QI			
Susan Childs (Alternate IC/QI)	907-646-7112		██████████
Sean Churchfield (Alternate IC/QI)	907-771-7217		██████████
Public Affairs/Information Officer			
Michelle Malerich	907-771-7247		██████████
Megan Baldino	907-771-7254		██████████
Liaison Officer			
Talitha Birch	907-771-7255		██████████
Greg Horner	907-646-7131		██████████
Safety Officer			
Lucy Jean	907-646-7116		██████████
Chris Holden	907-771-7201		██████████
Legal Officer			
Marc Stone	907-646-7127		██████████
Pat Morris	504-425-4651		██████████
Company Security Officer (IC Support)			
Phil Smith	504-425-4252	██████████	██████████
Martin Padilla	832-337-1900		██████████
Senior Executive (IC Support)			
Pete Slaiby	907-770-3700		
Gary Cameron	907-771-7249		██████████
Executive Liaison (IC Support)			
Peter Velez	281-250-0448		██████████
GENERAL STAFF			
Operations Section Chief			
Curtis Wright	907-771-7234		██████████
ACS Staff	907-659-2405		
AES-RO Staff	907-339-6200		
ARS Staff	907-865-4900		

**Table 2.2-1
 IMT Contact Information (Continued)**

NAME	OFFICE #	PAGER #	CELL #
Staging Area Manager			
ACS Staff	907-659-2405		
ARS Staff	907-865-4900		
Source Control			
Ted Bergman	907-433-3479		██████████
Tony Harris	907-433-3480		██████████
Operations Section Branch Directors			
Shell Staff	907-770-3700		
ACS Staff	907-659-2405		
AES-RO Staff	907-339-6200		
ARS Staff	907-865-4900		
Planning Section Chief			
Mickey Battle	907-646-7119		██████████
Greg Guerreiro	907-433-3406		██████████
Technical Specialists			
Michael Macrander	907-646-7123		██████████
Victoria Broje	281-544-7437		██████████
ACS Planning and Development Manager (IMT coach/facilitator)	907-659-3220		
Logistics Section Chief			
Karen Spring	907-646-7111		██████████
Lev Yampolsky	907-646-7160		██████████
Finance Section Chief			
Gary Becker	907-646-7151		██████████
Zach Reigle	907-646-7105		██████████

**Table 2.2-2
 IMT Responsibilities and Checklist**

POSITION	RESPONSIBILITIES		COMMENTS
INITIAL RESPONSE INCIDENT COMMANDER	<input type="checkbox"/>	Fill in Spill Report Form	
	<input type="checkbox"/>	Assist field personnel (medevac)	
	<input type="checkbox"/>	Assemble Spill Response Team	
	<input type="checkbox"/>	Brief team	
	<input type="checkbox"/>	Assign duties (org. chart)	
	<input type="checkbox"/>	Remind team to keep logs	
	<input type="checkbox"/>	Establish objectives (chart)	
	<input type="checkbox"/>	Name Incident	
	<input type="checkbox"/>	Determine response strategies	
	<input type="checkbox"/>	Conduct air surveillance	
	<input type="checkbox"/>	Establish meeting times (chart)	
	<input type="checkbox"/>	Notify agencies (chart)	
QUALIFIED INDIVIDUAL (IC or DIC)	<input type="checkbox"/>	Status of incident, facility, and personnel	
	<input type="checkbox"/>	Evaluate level of response required and activate IMT support as required	
	<input type="checkbox"/>	Conduct internal / external notifications as required	
	<input type="checkbox"/>	Authorize the use of response resources	
	<input type="checkbox"/>	Participate in Incident Command briefings	
LIAISON OFFICER	<input type="checkbox"/>	Notify/call NRC	
	<input type="checkbox"/>	Notify appropriate state agencies	
	<input type="checkbox"/>	Notify federal agencies	
	<input type="checkbox"/>	Request safety zones air / water (USCG)	
	<input type="checkbox"/>	Request Notice to Mariners (USCG)	
	<input type="checkbox"/>	Submit <i>in situ</i> Burn request to USCG	
	<input type="checkbox"/>	Submit dispersant use request to USCG	
	<input type="checkbox"/>	Obtain approval to decant (USCG)	
PUBLIC INFORMATION OFFICER	<input type="checkbox"/>	Notify corporate executives	
	<input type="checkbox"/>	Notify partners	
	<input type="checkbox"/>	Notify company personnel	
	<input type="checkbox"/>	Prepare for media interest	
	<input type="checkbox"/>	Keep the public informed	
	<input type="checkbox"/>	Coordinate media efforts through the Joint Information Center	
	<input type="checkbox"/>	Coordinate efforts with USCG	
	<input type="checkbox"/>	Identify community concerns	

**Table 2.2-2
IMT Responsibilities and Checklist (Continued)**

POSITION	RESPONSIBILITIES		COMMENTS
SAFETY OFFICER	<input type="checkbox"/>	Evaluate / monitor hazards	
	<input type="checkbox"/>	Notify offset operators	
	<input type="checkbox"/>	Obtain MSDS / Prepare Site Safety Plan	
	<input type="checkbox"/>	Establish first aid posts	
	<input type="checkbox"/>	Coordinate search and rescue operations	
	<input type="checkbox"/>	Coordinate post-incident debriefing	
	<input type="checkbox"/>	Conduct air monitoring as may be needed	
	<input type="checkbox"/>	Establish initial site safety plan	
	<input type="checkbox"/>	Ensure HAZWOPER compliance	
	<input type="checkbox"/>	Investigate safety related accidents and report to Incident Commander	
	<input type="checkbox"/>	Conduct safety inspections	
LEGAL OFFICER	<input type="checkbox"/>	Advise the IC / UC on legal issues associated with response operations	
	<input type="checkbox"/>	Establish documentation guidelines; review of press releases / contracts	
	<input type="checkbox"/>	Advise IMT Sections when requested	
	<input type="checkbox"/>	Participate in incident investigations and damage assessments	
	<input type="checkbox"/>	Participate in ICS meetings and other meetings as requested	
OPERATIONS SECTION CHIEF	<input type="checkbox"/>	Direct surveillance operations	
	<input type="checkbox"/>	Mobilize Response Contractors as needed and other equipment that is deemed necessary to response efforts by the UC.	
	<input type="checkbox"/>	Equipment / operators / supervisors	
	<input type="checkbox"/>	Take air monitoring equipment	
	<input type="checkbox"/>	Obtain samples of spilled material	
	<input type="checkbox"/>	Prepare shoreline for impact (pre-clean)	
	<input type="checkbox"/>	Contact ASI	
	<input type="checkbox"/>	Spray / Spotter aircraft and personnel	
	<input type="checkbox"/>	Vessel for USCG SMART Team	
	<input type="checkbox"/>	See Appendix G for equipment (potential services not under contract).	
	<input type="checkbox"/>	Send company representative to site / staging	
	<input type="checkbox"/>	Consider night time spill tracking – RTTI	
	<input type="checkbox"/>	Consider pre-cleaning the shoreline prior to impact	
	<input type="checkbox"/>	Establish Section Branch / Groups (e.g., Wildlife, Source Control)	
	<input type="checkbox"/>	Commence source control operations, mobilize specialist	
	<input type="checkbox"/>	Verify amount spilled and calculate total potential	
	<input type="checkbox"/>	Develop / Obtain approval for repair plan	
	<input type="checkbox"/>	Contact wildlife specialist / refuge mgrs for information	
<input type="checkbox"/>	Activate resources for wildlife protection		

**Table 2.2-2
 IMT Responsibilities and Checklist (Continued)**

POSITION	RESPONSIBILITIES	COMMENTS
LOGISTICS SECTION CHIEF	<input type="checkbox"/> Locate utility / crew boats, helicopters	
	<input type="checkbox"/> Prepare Air Operations Plan	
	<input type="checkbox"/> Set up decontamination stations	
	<input type="checkbox"/> Identify/ set up staging areas	
	<input type="checkbox"/> Ensure temporary storage-recovered oil capacity	
	<input type="checkbox"/> Request mechanics / parts trailers	
	<input type="checkbox"/> Prepare medical plan, source EMTs	
	<input type="checkbox"/> Prepare communications plan (ICS 205)	
	<input type="checkbox"/> Obtain security at ICP / staging areas	
	<input type="checkbox"/> Establish services	
	<input type="checkbox"/> Housing	
	<input type="checkbox"/> Catering	
	<input type="checkbox"/> Parts trailers/ mechanics	
	<input type="checkbox"/> Fueling facilities	
	PLANNING SECTION CHIEF	<input type="checkbox"/> Call Response Group
<input type="checkbox"/> Request trajectories		
<input type="checkbox"/> Show dispersant timeline		
<input type="checkbox"/> Shoreline impact? Request sensitive areas		
<input type="checkbox"/> Update with weather forecasts / surveillance		
<input type="checkbox"/> Prepare dispersants / <i>in situ</i> burning request form		
<input type="checkbox"/> Post / Update charts in ICP		
<input type="checkbox"/> Commence NRDA operations (sampling)		
<input type="checkbox"/> Determine Sensitive Areas as Identified in the ACP and OSRP		
<input type="checkbox"/> Call out technical specialists as needed		
<input type="checkbox"/> Coordinate IAP development		
<input type="checkbox"/> Set up secured filing system		
<input type="checkbox"/> Develop Waste Disposal Plan		
<input type="checkbox"/> Obtain USCG approval for decanting		
FINANCE SECTION CHIEF	<input type="checkbox"/> Issue WBS Element	
	<input type="checkbox"/> Implement process to handle claims and insurance issues	
	<input type="checkbox"/> Review contracts with Logistics / vendors	

2.3 SPILL RESPONSE OPERATING TEAM [30 CFR 254.23(c)]

2.3.1 Trained and Available on 24-hour Basis

All members of the Spill Response Operating Team (SRT) are trained individuals and the positions (including trained alternates) are available on a 24-hour basis, seven days per week. Additional information on Shell and ACS training programs is presented in Appendix F (Training and Drill Information).

2.3.2 Spill Response Coordinator and Alternate(s)

The trained spill response coordinator and alternate are presented below. These individuals have the responsibility and authority to direct and coordinate response operations on behalf of Shell.

Primary Spill Response Coordinator:

Curtis Wright
3601 C Street, Suite 1000
Anchorage, AK 99503
907-771-7234

Alternate Spill Response Coordinator:

Buddy Custard
3601 C Street, Suite 1000
Anchorage, AK 99503
907-771-7206

The spill response operating team includes Shell's OSRO memberships (ACS and MSRC) and contracted services with ARS and AES-RO. Personnel from these organizations are trained and available 24 hours per day, seven days per week to deploy and operate spill-response equipment. Required mobilization times for these resources depends on the spill event. Mobilization times are described in the Shell Tactics and ACS Tactics. The numbers and specific types of personnel required for response are listed in the Tactics. In addition to these entities, there are other contractual vehicles through which trained personnel and equipment are available. For example, ACS has MSAs with numerous (more than 30) contractors (ACS Tactic L-9). APICOM has a mutual aid agreement to provide equipment and personnel to members on an as-available basis. Accessing these resources is described in ACS Tactic L-10.

Shell has organized their approach to spill response in the Chukchi Sea based upon dedicated response assets as described in Appendix A. These assets, such as the OSR vessel have been outfitted with equipment that is appropriate for the use in this environment and provides for alternative response techniques. Please refer to Appendix A for additional information on the available assets and response equipment on each TF referenced in Section 2.7 of this document.

2.4 SPILL RESPONSE OPERATIONS CENTER (INCIDENT COMMAND POST) AND COMMUNICATIONS [30 CFR 254.23(d)]

2.4.1 Incident Command Post

Shell’s IMT would normally assemble at Shell’s Anchorage Command Post located at 3601 C Street, Suite 1000 (Figure 2.4.1-1), or otherwise as agreed with the UC. As needed, the Command Center will relocate to a location that would more readily support, with berthing and meals, a fully staffed IMT, 24 hours per day, seven days per week. Potential locations include numerous hotels within Anchorage, (e.g., the Marriott Hotel located at 820 W 7th Ave).

In the event that a forward command post is deemed necessary, Shell may activate command posts on the OSR vessel, at existing facilities, or activate the Mobile Response Center available through ACS (Tactic L-4). Forward command posts may also be established and located in Barrow and Wainwright at Shell offices (Shell hangers at the respective airports). These facilities are effectively equipped for timely activation. ACS’s Mobile Response Center may be deployed and equipped to other forward locations as dictated by the UC (see ACS Tactic L-4 for reference on deployment and equipment).

Figure 2.4.1-1 Anchorage Command Center




Equipment located at existing facilities in Barrow and Wainwright includes the following:

- Telephones and telephone books;
- Appropriate number of copy and facsimile machines and computer printers;
- Desktop and portable computers with printers and fax/modem capability;
- Internet and email access;
- Office furniture;
- Portable radios and marine communications base station;
- Cameras and video recording/playback capability;
- Office supplies (pens, pencils, paper, flash drives, blank CDs and DVDs, etc.);
- Chart paper with easels and status boards (dry-write);
- Overhead and computer projectors;
- Applicable ESI maps;
- Applicable MESA maps;
- Copies of the Shell Chukchi Sea Regional Exploration Program Oil Spill Response Plan;
- Copies of any appropriate local emergency response plans;
- Copies of the Unified Plan and the North Slope Subarea Contingency Plans; and
- Copies of the Shell Upstream Americas *Incident Management Handbook*.

Staging areas are depicted in Figure 2.4.1-2.

Figure 2.4.1-2 Shell Staging Areas

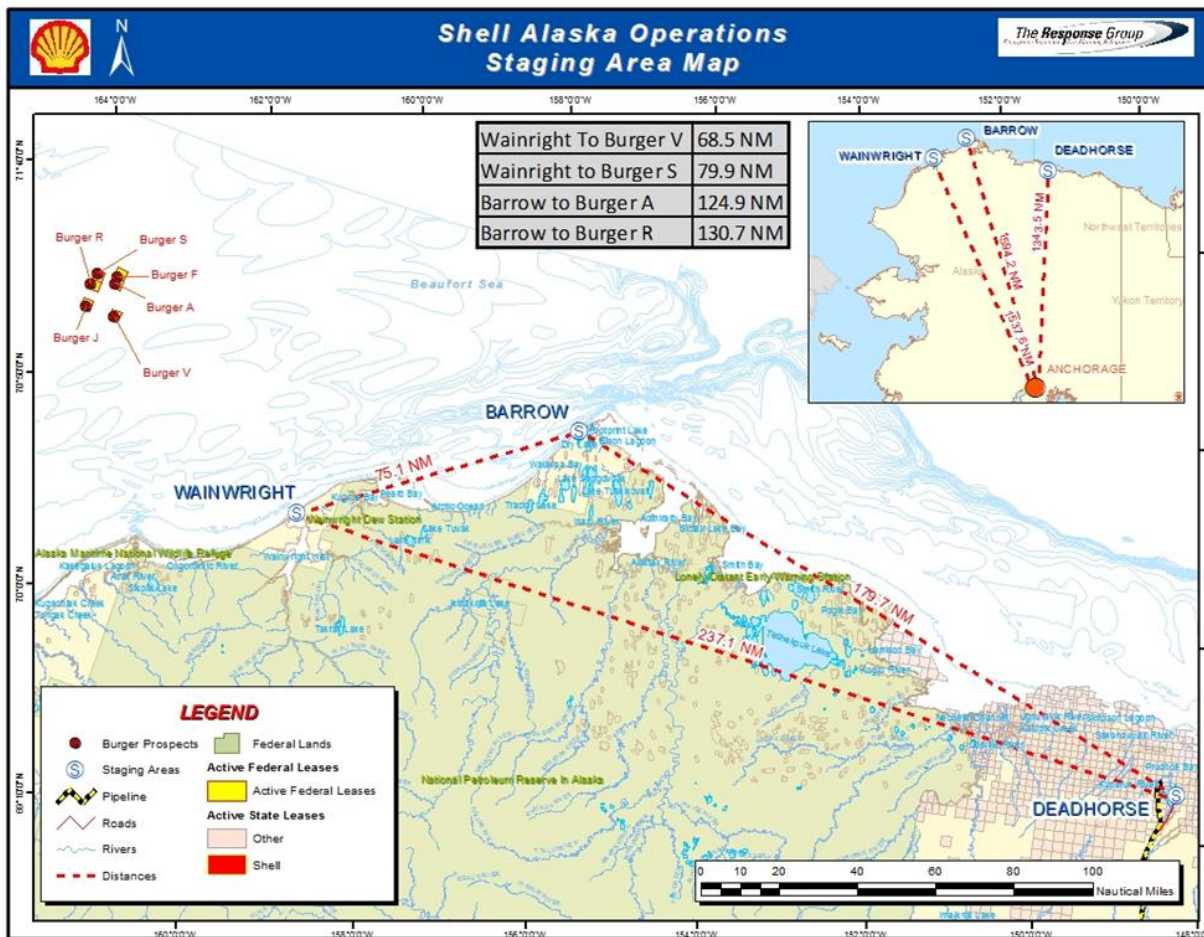

2.4.2 Communications Plan

Effective communication during a spill response requires that all parties understand and use the assigned radio frequencies and telephone numbers. Use of INMARSAT and or iridium satellite for communications with deployed OSR assets and the use of pre-programmed and designated frequencies ensures that emergency communications are immediately established for a response. As spill response efforts grow, additional frequencies and telephone numbers may be added to a complete Communications Plan that is distributed to all participants.

The Communications Unit Leader is responsible for establishing a plan that provides coverage in the field, and between the field and a command post. Communication requirements are determined by many factors, the most important of which are the location and nature of the spill response activities, and the number of staff placed in the field. Specific requirements include:

- Communications systems must be self-contained, compact, highly portable, and capable of providing all on-site and off-site communication links for the duration of the response.
- Communication equipment used in the immediate vicinity of spilled or recovered product must be intrinsically safe (explosion-proof).

Field teams will work in close proximity to each other, and generally require only a single tactical communication link operating over a distance of several miles. A repeater radio link would be required to bridge worst-case distances from the field to the staging area and support teams.

A description of the statewide communications plan developed by the crude oil spill cooperatives (ACS, CISPRI, SERVS) is provided in Table 2.4.3-1. The frequencies noted have been licensed for use statewide on oil spills. The radio plan also provides up to 20 VHF tactical channels and includes VHF marine channels. The plan has provisions for adding other area-specific channels unique to individual cooperatives or Member Companies and uses exclusively VHF channels in the 150 MHz to 174 MHz band.

The Alaska Statewide Frequency Plan consists of 48 channels, designated OS-29 through OS-76. When referring to these channels, the channel number is always prefixed with the letters “OS.” This clarifies the identity of the channel under discussion and minimizes potential confusion that the channel might represent a marine channel, or some other internal company channel.

2.4.3 Communications Equipment

The Shell OSR vessels will be equipped with radio subscriber units that will be tuned to the assigned frequencies. OSR vessels also may use radio channels on Shell’s OSRO (ACS) communication network. Also, all vessels will have standard marine radio systems. Additional ACS subscriber units are available for use in OSR or drills. Shell, through ACS, provides for an extensive communications network in the North Slope region, built on the basis of VHF radio coverage. Also, UHF radio can be linked to VHF systems via an ACS UHF-VHF link.

Descriptions of communications resources and systems are provided in ACS Tactics L-5 and L-11A and Shell Tactic LE-2. The following communication frequencies could be used, depending upon the location and emergency situation (Table 2.4.3-1).

**Table 2.4.3-1
 Summary of Alaska Statewide Frequency Plan Channels**

CHANNEL	TYPE	DESCRIPTION
OS-1 through OS-28		Reserved for individual and unique use by Member Companies and cooperatives.
OS-29 through OS-32	Tactical channels	Match marine radio channels.
OS-33 through OS-52	Fixed repeater channels (and associated talk-around channels)	Located on the North Slope, along the Alyeska Pipeline corridor, and in Cook Inlet or Prince William Sound. The talk-around channels are available for tactical use when operating in an area not covered by the associated repeater channel.
OS-53 through OS-64	Portable repeater channels (and associated talk-around channels)	Licensed for use statewide. The talk-around channels are available for tactical use when operating in an area not covered by the associated portable repeater channel.
OS-65 through OS-76	Marine Channels OS-72 is Marine 11 OS-75 is Marine 80A OS-76 is Marine Repeater 85	For both tactical, operations, and logistics use, as required. Note that marine channels are specifically given OS designations that do not reflect the actual marine channel number.
OS-77 through OS-100		Reserved for potential future expansion of the Plan.

The communication systems that may be employed in a given location or spill situation include:

- **Telephone Circuits.** Telephone systems at many company facilities are generally sufficient to handle the volume of telephone calls associated with most spills. However, sparsely populated areas may have very limited telephone service, or the reserve capacity of the system may be so small that temporary service to remote control centers cannot be quickly provided. Solutions to such potential telephone bottlenecks might include establishing microwave or satellite links to these areas using contracted resources. (See Table G-1 in Appendix G).
- **Cellular Telephone Systems.** Standard cellular coverage in Alaska is limited to populated areas primarily in Southcentral and Southeast Alaska, but coverage continues to expand rapidly within the state. The increasing availability of satellite-based cellular coverage is expected to make cellular telephone the communications system of choice. Battery-powered cellular telephones are preferred, to free the user from dependence on commercial power or vehicle batteries.
- **VHF-FM Marine Radio (156 MHz to 158 MHz).** On-water cleanup operations are expected to use marine VHF radio equipment for inter-vessel, ship-to-shore, or response personnel communications. Marine channel 16 is the international distress and hailing frequency. Marine VHF radios can also be used to warn other, non-response vessels about ongoing cleanup operations. Marine radios can be used for coordinating the cleanup operations, although UHF radios are also suitable for this purpose.
- **VHF-AM Aircraft Radio (118 MHz to 136 MHz).** These VHF frequencies are used for ground-to-air communications, although most aircraft can also monitor VHF marine and many UHF channels. Ground-to-air communications are very important for relaying surveillance information, as well as coordinating the transport of equipment and personnel.

- **UHF (454/459.000 MHz).** UHF radio systems are typically used for land-based operations, although they are also acceptable for marine use. UHF radios are often limited to just a few frequencies or channels that are preset into the units. Most UHF radios are 3- or 6- (but can be up to 16) channel models with the actual frequencies dependent on the license of the particular facility or company.
- **HF SSB Radio (2 MHz to 20 MHz).** For communication over long distance at sea and in undeveloped areas, operators may consider obtaining HF-SSB voice radio equipment. Radio propagation by this mode changes widely over daily and yearly cycles, and is strongly influenced by changes in solar activity. Communications may be excellent with a station 31 mi (50 km) away at a given time and barely audible a few hours later.
- **INMARSAT Satellite.** INMARSAT systems can be installed on vessels or at remote locations and, where approved for voice and fax communications to standard telephone lines, almost anywhere in the world. The associated costs are relatively high, but these systems can be invaluable in areas where other forms of communication are unavailable, inconsistent, or facsimile transmissions are critical.
- **MSAT.** MSAT is a satellite system based on the world's most powerful commercial mobile satellite. Voice communications, including continent-wide group and private communications are available through use of the MSAT-G2 radio. The MSAT-G2 radio supports point-to-point and point-to-multi-point communications including push-to-talk, push-to-track, and voice services.
- **Iridium Satellite.** Iridium telephones use satellites to provide worldwide voice and data communications. The network is unique in that it provides whole-earth coverage, including polar regions, oceans, and airways.
- **Paging Systems.** Pagers are one-way radio communication systems that enable persons within range of the paging system transmitter to be alerted or to receive a brief message.
- **700 MHz.** Radio communication networks provide broadband wireless connectivity primarily in the Prudhoe Bay area and west to Alpine, including coverage offshore in short distances (less than 10 mi [16 km]).

2.4.3.1 Drillship Communication

The communications equipment maintained on site at the drillship is described in subsections below. Radio coverage on the drillship will be with VHF marine and land mobile radio.

Shell's OSR vessels will be equipped with radio subscriber units that are both hand-helds and dash-mounts, programmed with the frequencies of ACS- and Shell-licensed mobile, land VHF radio networks. For communications with spill response vessels in the area, base station radios will also be installed on the drillship. Standard VHF marine radio will be used to communicate with response vessels and drilling support vessels within a 30- to 50-mi radius of the drillship. The exact range is dependent on topography and, to some extent, on weather. For communication with response ships and other vessels beyond this radius, the satellite-based telephones would be used.

The drillship will have a VSAT voice and data service in excess of 512 kbps to facilitate primary communications with shore resources. The VSAT service is composed of a Ku band satellite communication package and is supplied by Alaska Telecommunications Inc. The VSAT service

on the drillship will have a back-up satellite communication system via Noble Drilling. Telephone and facsimile lines will be provided over the satellite communication systems.

Voice telephone is the primary means of direct communication with Anchorage, the command post, Shell staging areas, off-site resources, agencies, and other company contacts. The Shell-licensed radio frequencies may also be used where range permits. Voice telephone calls can be conducted across the VSAT system and by using Iridium satellite telephones (or MSAT telephones). There will be multiple telephone and facsimile lines available on the drillship for multiple simultaneous inbound and outbound calls.

2.4.3.2 Intercom System

Barkway intercom system units are located in mud, utility, bulk, mechanical and electrical areas, drill floor, and manager's office. The systems are equipped with priority override speed calling and two independent speech paths. The systems will be interrupted temporarily by a page or an alarm from a tone generator. Another system, Vingtor, links the drilling unit pump room, radio room, and control room to the drilling unit pump room, control room, and stairwell, and operates independently of all other systems. This is a hands-free, talk-back system.

2.4.3.3 Page and Alarm System

This system consists of a camp page and alarm system. The camp page has high- and low-level volumes (low for sleeping areas); however, in the event of an alarm or emergency page, the volume is increased to high. Tone generators in the control unit of the page system will provide three distinct tones for:

- General – Vibrato – percussive 816 Hz tone;
- Combustible Gas – Yeow – 1,260 Hz to 600 Hz – downward sweep in 1.6 seconds; and
- H₂S Gas – Hi-Lo – 780 Hz to 600 Hz, alternately – 0.52 seconds each.

A console in the radio room is interfaced to the control unit with push-button control of appropriate page, alarm, and cancel functions. This console is also interfaced to fire panel and remote sensors with lamps to indicate fault conditions, as well as an auto/manual switch to allow for automatic gas alarms if the radio room is not staffed.

All alarm tones, standard pages, and emergency pages are transmitted to the drilling unit and camp via mixer-amplifiers installed in the equipment room in a rack with the page control unit. The drilling unit mixer/amplifiers are installed in the stores room.

2.4.3.4 Communication and Navigation Equipment, *Discoverer*

The drillship has the following communication and navigation equipment installed:

- Mitel SX-20 telephone exchange with seven out-going trunks and associated locals
- Four each: VHF, FM radio telephone, Raytheon Ray-55
- VHF air-to-ground radio, WCS300
- Non-directional beacon, Wilcox 485
- Two each: HF SSB – Motorola Triton
- Radar transponder – Vega 367X
- Rapifax machine
- Satellite dish for TV, modulator, amplifier, intercamp wiring, VCR
- Walkie-talkies (15)
- 2182 Marine Emergency Watch receiver

- Class 1 and Class 2 Emergency Position Indicating Radio Beacon
- Lifeboat radio and VHF crash boat radio
- Weatherfax receiver – Furuno
- Telecommunications currently supplied by Alaska Telecommunications Inc., including a Ku band satellite system as the primary unit for telephones, data and fax, and a secondary VSAT system via Noble Drilling.
- Two each: 25 kW Decca radars; one mounted on top of the camp, the other mounted on top of the derrick
- Satellite navigator – Magnavox 4102
- Three VHF radio-telephones – Raytheon Ray-78; one installed in each crane
- One Sperry SR120 gyro compass
- Pantenna/amplifier entertainment system
- Three independent paging systems for all three cranes.

2.4.3.5 Patch Number 1 and Patch Number 2

HF radio can be patched to any worldwide telephone. When using these systems, the operator should explain to the other party that they have to wait for sender to stop transmitting before they try to talk or their conversation will be blocked.

2.4.4 Equipment Maintenance

Communications equipment will be tested and maintained according to the following schedule:

- Periodically:
 - Rechargeable batteries will be tested and recharged.
 - Radio and electronic equipment will receive an operational test to ensure that the equipment is working.
- After Use:
 - All communications equipment used in actual spill response operations would be inspected, cleaned, and tested before being returned to storage.

2.5 LISTING OF TYPES AND CHARACTERISTICS OF OIL HANDLED/ STORED/ TRANSPORTED AT FACILITY [30 CFR 254.23(e)]

The MSDS for low sulfur diesel is provided in Appendix M (USCG Supplement).

No crude oil is expected to be stored at the facility. For the purposes of the OSRP, and because the properties of oil from an exploration well would not yet be determined, Alaska North Slope (ANS) crude oil is used as an analog oil as it is representative of medium weight oil (25 to 30° API). The following properties are derived from an ANS sample collected from the Trans-Alaska Pipeline System Pump Station 1.

North Slope Crude Oil Property Description	Value
API Gravity (@15°C)	30.6
Viscosity (@15°C)	16 cSt
Max. Water Content in Oil/Water Emulsion	70 % by wt
Asphaltene Content	5 % by wt
Pour Point	-55 °C
Flash Point	-19 °C

Based upon MSDS Number: 00001392 Rev 002, the vapor pressure for ANS Crude Oil was reported to be 12 to 15 psi at 100° F.

2.6 PROCEDURES FOR EARLY DETECTION OF A SPILL [30 CFR 254.23(f)]

2.6.1 Drillship Integrity Inspections

During drilling, a daily visual inspection of major tanks and lines will be conducted. Shift inspections are conducted by personnel to detect possible leakage, damage, or serious deterioration of the storage tanks, fuel lines, piping, and associated facilities. Potential leaks will be properly reported in the daily tour report and the Toolpusher will be notified.

Piping between the storage tanks and boilers or engines is attached to the structure with brackets or double plates that protect the piping from damage. These brackets are visible for regular inspections. Much of the piping is routed by design to be out of the way and protected from impact or the environment.

Spill detection methods include:

- Visual inspections will be conducted during personnel duties.
- Support vessel crews will maintain vigilance for possible spills and notify when detected.
- All Shell personnel are required to be diligent in observing for leaks or indications of leaks/spills during the course of operations.

General source control methods include:

- BOPs are utilized as required for drilling operations.
- Personnel engaged in offshore operations have been trained to respond appropriately to a source control event. Safety, of course, is first priority.
- A source control group is identified as part of the IMT within the Operations Section. Their duties are to assess the situation, contact well control specialists, divers, or other specialists, as directed by the IC/UC.
- A WCCP will be utilized for well control.

2.6.2 Drilling Operations

Visual surveillance is used for discharge detection. Visual inspections are an important component of leak and spill detection because automated systems may not detect small leaks and spills. The drillship and fuel-transfer operations will be closely monitored at all times (see Section N.4.1.5). Operations will be staffed 24 hours per day by drilling personnel. Once per day

facility personnel will visually inspect tankage, sumps, and drains for indications of oil leaks. Piping, valves, pumps, and other machinery will also be visually inspected as part of the daily routine. Any oil leaks or spills that are contained on board will be noted, the source of the spill will be located and corrected, and the oil spill will be cleaned up. During drilling, drillers continually monitor the drilling equipment and will stop drilling if unsafe conditions are observed.

2.6.3 Automated Methods

The drillship has a system of controls, monitors, and procedures to assist in the early detection of potential discharges. For both downhole and surface operations, these detection systems include standard operating procedures governing the monitoring, handling, and containment of fluids. Specifically, visual and manual detection in combination with drilling policies and procedures allow for ample discharge detection.

Several independent ESD systems limit the scope of any single failure. An ESD can be initiated by process conditions outside pre-set limits or manually initiated by operators at the instrument/control panels. Manually-actuated ESDs (punch-button panels) are also strategically placed throughout the facility. ESDs are specifically provided for the primary systems of ship operations, drilling operations, and fuel transfers. Drill operation shutdowns are located on the drilling unit floor. Fuel transfer ESDs are located on the lower and upper deck of the helideck. Ship-to-ship fuel transfer ESD and drilling operation shut downs, including associated hydraulic systems, are located on the drill floor. ESDs to shut down all ship operations are located in the emergency response room and in the semi-conductor room. Inspection rounds are documented daily. Incidents are recorded using an approved incident reporting and investigation process.

Further discharge detection is allowed by the continuous monitoring of the drillship's bilge systems. Potential discharge collects in the systems where it eventually travels to the pump room. Visual surveillance of the bilge system piping, valves, and pumps allows for early detection of a spill.

Additional discussion of well control processes is presented in Appendix N.

2.7 RESPONSE PROCEDURES [30 CFR 254.23(g)]

Shell is a member of the North slope-based OSRO, ACS. ACS would be used as a response action contractor for spill response activities. In addition to ACS, contracted response organizations, AES-RO and ARS, will also be available while critical drilling operations are underway in hydrocarbon-bearing zones; and will provide response in the event of an actual oil spill incident, including related maintenance, ongoing assurance of response capabilities, and coordination of training activities. Per the provisions of 30 CFR 254.4, this OSRP incorporates references to the ACS Technical Manual, available online at:

<http://www.alaskacleanseas.org/tech-manual/>

Shell provides response equipment for the offshore response. Response activities will be conducted using ACS Tactics, as defined in the ACS Technical Manual, and Shell Tactics as defined in the Shell Tactics Manual.

In addition, Shell may mobilize the OSR barge to provide personnel and equipment for nearshore response operations (Shell Tactics LE-1 through LE-4, and ACS Tactics L-1 through L-12). Shell may also mobilize personnel and equipment for shoreline protection and response along the Chukchi Sea coast (ACS Tactics L-1 through L-12). Additional information on resources available to Shell is provided in Appendix A (Response Equipment) and Appendix G (Logistical Support Services and Supplies).

Depending upon the severity of a situation, federal and state logistics may also support the response. Examples of these functions include ordering, tracking and servicing government resources, arranging for transportation and lodging for government response staff, providing communications to government oversight staff, and performing other logistical functions specifically in support of the government oversight role. These governmental functions may become an integral part of the overall Logistics Section.

Shell, through its membership with ACS (a member of APICOM), has access to other OSRO's out-of-region (Tier III) resources beyond those identified on the North Slope through a mutual aid agreement. This agreement, summarized in ACS Tactic L-10 provides for access to equipment and personnel on an as-available basis.

Additional information on resources available to Shell is provided in Appendix A and Appendix G. Depending upon the equipment type, resources may be requested and on location within 72 hours. Logistics contractors are identified in Appendix G. Response equipment, materials, support vessels, and strategies listed in this OSRP are suitable within the limits of current technology for the range of environmental conditions anticipated.

2.7.1 Spill Notification Procedures [30 CFR 254.23(g)(1)]

The person reporting an oil spill to the immediate supervisor or QI may be required to supply minimum spill assessment information to provide as complete an understanding of the incident as possible. Some initial spill response actions and information that may be reported are presented in Table 2.7.1-1 and Table 2.7.1-2. In order to save time, the Spill Report Form (reference the OSRP Quick Guide and Appendix J - Forms) should be completed while reporting the incident. Information not immediately known may be inserted on the form as soon as it becomes available. The report should not be delayed to gather complete information.

**Table 2.7.1-1
 Emergency Action Checklist**

EMERGENCY ACTION CHECKLIST	
<p>INITIAL SPILL RESPONSE ACTIONS</p> <ol style="list-style-type: none"> 1. Protect people: Safety is first priority. Sound alarm. Shut off ignition sources. Restrict access. Evaluate as necessary and initiate rescue and response actions. 2. Notify your supervisor. 3. Stop the spill at source, if safe to do so. 4. Assess possible hazards: Fire and explosion potential of vapors at or near the source, Potential toxic effects of the discharge, Damage to facility affecting safety, and Recovery of the spilled product. 5. For a blowout, implement well control and evacuation procedures and activate Tier III ICS. 	<p>WHAT TO REPORT TO YOUR SUPERVISOR</p> <ol style="list-style-type: none"> 1. Was anyone hurt? 2. Where is the spill? 3. What time did it happen? 4. What was spilled? 5. How much was spilled? 6. What is the rate of release? 7. What is the source? 8. What are the weather conditions? 9. What actions have you taken? 10. What equipment do you need? 11. Are there any immediate environmental impacts? 12. Who did you notify?

The emergency action and notification sequence varies depending on the size of the spill and required response. The spill classifications described below apply only to the emergency phases of containment and initial recovery of a spill.

Spill Classification Guidelines

Tier I Spill: Local spill that the affected asset can effectively respond to with equipment and personnel on board (such as deploying absorbent containment and recovery materials) (Table 2.7.1-2). No immediate off-site assistance is needed.

Tier II Spill: Large spill that would require mobilization of the IMT and/or all dedicated response resources identified in this OSRP.

Tier III Spill: Large spill with potential to require mobilization of all resources listed above for Tier II plus additional national or international resources not specified in this OSRP.

Figure 2.7.1-1 presents a flow diagram depicting the internal emergency notification process. If the initial On-Scene IC or the IRIC determines that the spill is a Tier II or III event, additional responses and notifications should take place (Table 2.7.1-3 and Figure 2.7.1-2). The names, positions, and telephone numbers of facility personnel responsible for spill notification are listed in Table 2.2-1. Upon completing regulatory required notifications, SART should be notified at 713-241-2532 in the event of a spill to water from maritime transportation operations or a spill from an asset that could result in a Tier III response.

During Tier II or Tier III spill events, Shell’s IMT would normally assemble at Shell’s Anchorage Command Center located at 3601 C Street, Suite 1000, or otherwise as agreed with the UC. A summary of the emergency actions described in this OSRP is available for field personnel. Incident-specific Safety and Security Plans will be prepared to safeguard responders and the public.

**Table 2.7.1-2
 Initial Spill Response and Notification Process – Tier I Spill**

TIER I SPILL	
PERSONNEL	ACTION TO BE TAKEN
FIRST PERSON TO SEE THE SPILL	Assess safety of situation, determine whether source can be stopped, and stop the source of spill if possible. Immediately notify your supervisor. If your supervisor is not available, notify the Drilling Foreman.
INITIAL ON-SCENE INCIDENT COMMANDER (Drilling Foreman)	From a safe distance, determine whether the spill is stopped or contained. Start agency and corporate notifications. Call the IC. Call the Drilling Superintendent (if not available, call the Wells Manager). Complete applicable spill report form (Figure 2.7.1-2). Respond as directed by the IC to contain and recover the spill.
IRIC/QI (Asset Manager or designee)	Activate appropriate components of IMT. Determine if Tier I, Tier II, or Tier III spill actions must be taken. Ensure the NRC has been notified (1-800-424-8802).

2.7.1.1 Initial Reporting

Any Shell contractor or employee is required to report the spill to their immediate supervisor. The person in charge receiving the initial spill report will assess the situation and then make appropriate agency and corporate notifications as established in the on-board procedures.

The IRIC will then continue the internal and external reporting sequence to ensure proper notification of response personnel, appropriate company management, and government agencies. Emergency contact telephone numbers for Shell, response action contractors, and mutual aid (if required) are presented in Table 2.7.1-4.


Table 2.2-1 lists names, positions, and telephone numbers of facility personnel responsible for spill notification. Agency and external notification Information (including Native corporations and villages) is included in Table 2.7.1-5. The Shell spill report form (Figure 2.7.1-2) must be completed for any reportable spills.

**Table 2.7.1-3
Initial Spill Response and Notification Process – Tier II or Tier III Spill**

TIER II OR TIER III SPILL	
PERSONNEL	ACTION TO BE TAKEN
IC/QI	<p>Gather information; assess magnitude/severity of the spill; and ensure notification of dedicated response resource and Shell management.</p> <p>Ensure appropriate internal and external notifications are implemented.</p> <p>In the case of an actual or potential Tier III event, ensure SART is notified and mobilized.</p> <p>Verify notification of the NRC (1-800-424-8802).</p> <p>Establish objectives and response strategies. Monitor status of incident, facility, and personnel.</p> <p>Work closely with Safety Officer to:</p> <ul style="list-style-type: none"> • assess any and all risks of accidental ignition of the blowout hot zone and safe operating distances for all operations; and • need and practicality of safely and deliberately igniting the vapors over the surfacing oil plume. <p>Mobilize additional resources (in addition to on-site equipment and personnel) if necessary.</p>
LIAISON OFFICER	<p>Confirm that all state and federal agencies and appropriate Native village authorities and corporations have been notified.</p> <p>Ensure notification of the NRC (1-800-424-8802).</p> <p>Request safety zones for air and water.</p> <p>Request Notice to Mariners (USCG).</p> <p>Obtain USCG approval to decant.</p> <p>Prepare written reports to agencies.</p>
PUBLIC INFORMATION OFFICER	<p>Establish Joint Information Center.</p> <p>Prepare for media interest.</p> <p>Keep the public informed.</p> <p>Coordinate media efforts through the Joint Information Center.</p> <p>Identify community concerns.</p>
SAFETY OFFICER	<p>Evaluate and monitor hazards.</p> <p>Notify off-site operators.</p> <p>Obtain MSDSs and prepare initial Site Safety and Security Plan to safeguard responders.</p> <p>Establish first aid posts.</p> <p>Coordinate post-incident debriefing.</p> <p>Conduct air monitoring as may be needed.</p> <p>Establish initial site safety plan.</p> <p>Ensure HAZWOPER compliance.</p> <p>Investigate safety-related accidents and report to IC.</p> <p>Conduct safety inspections.</p>
LEGAL OFFICER	<p>Support IC / UC on legal issues.</p> <p>Ensure documentation process is activated.</p> <p>Review media messages and press releases.</p>
OPERATIONS SECTION CHIEF	<p>Mobilize and direct on-scene response equipment and personnel.</p> <p>Coordinate all operations with dedicated response resources and Shell's on-site response personnel.</p> <p>Coordinate search and rescue operations.</p> <p>Ensure Shell representation at site / staging areas.</p> <p>Coordinate with Environmental Unit for identification of protection sites.</p> <p>Oversee preparation of Air Operations Plan.</p>
PLANNING SECTION CHIEF	<p>Collect, process, and display incident information.</p> <p>Contact wildlife specialists and refuge managers for information.</p> <p>Provide basic environmental support.</p> <p>Supervise development of IAP.</p>
LOGISTICS SECTION CHIEF	<p>Determine and supply immediate incident resource and facility needs.</p> <p>Identify long-term service and support requirements.</p> <p>Coordinate and process requests for additional resources.</p>
FINANCE SECTION CHIEF	<p>Manage all financial aspects of an incident.</p> <p>Provide financial and cost analysis information as requested.</p>

Figure 2.7.1-1
 Internal Emergency Notification Process Diagram

Alaska Venture Emergency Response Plan Incident Notification

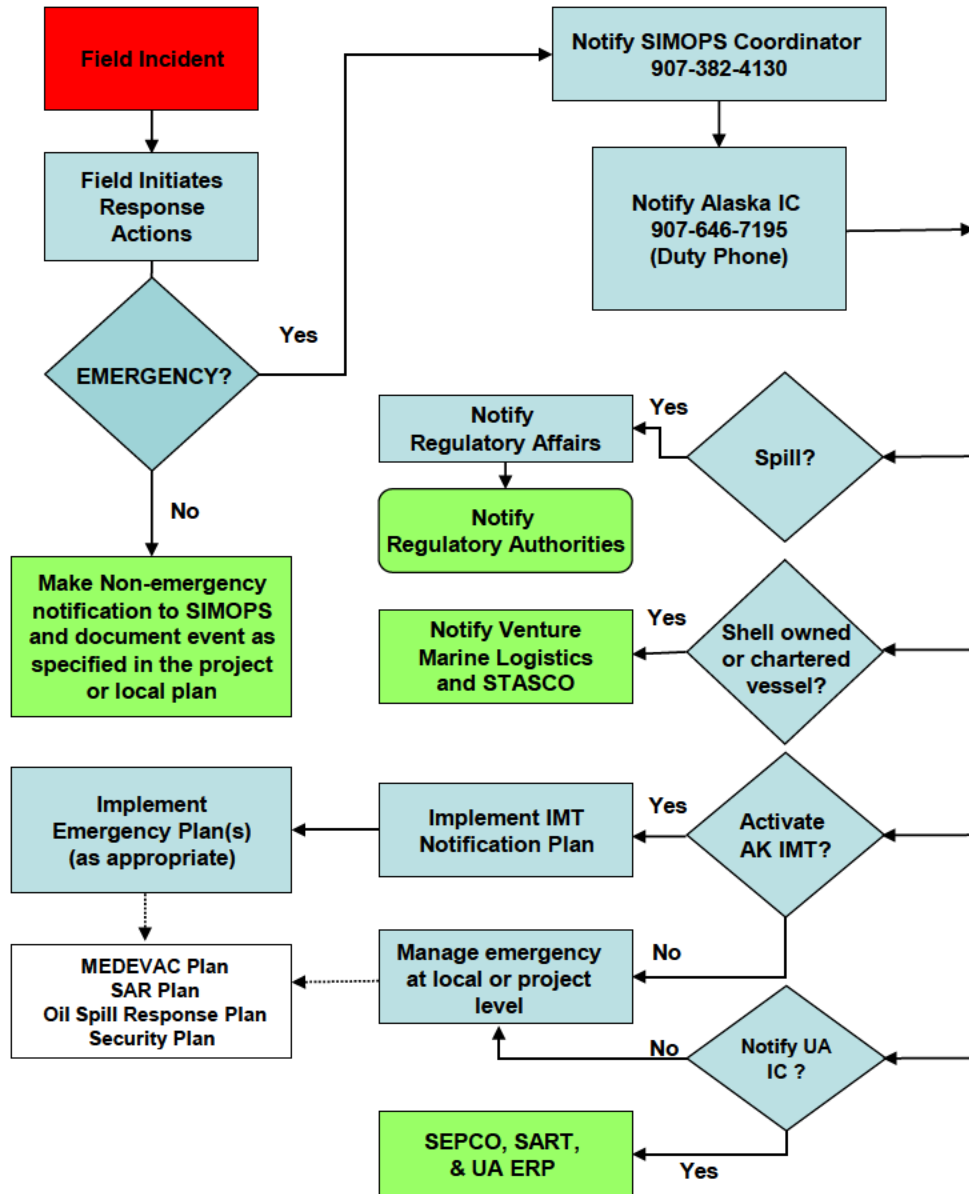

**Table 2.7.1-4
 Emergency Contact List**

EMERGENCY RESPONSE COORDINATOR		
Curtis Wright Main: 907-771-7234 Cell: [REDACTED] Email: curtis.wright@shell.com		
SHELL CONTACT LIST		
QI / IC Primary QI / IC Alternate QI / IC Alternate Security Wells Manager Regulatory Affairs Manager HSE Manager Environmental / SD Advisor Shell SART	907-771-7206 907-646-7112 907-771-7217 907-771-7222 907-433-3479 907-646-7112 907-646-7121 907-646-7123 713-241-2532	
Discoverer Drilling Superintendent Drilling Engineer Drilling Team Lead	Office 907-433-3480 Office- 832-337-1009 Office 832-337-0884	
OIL SPILL RESPONSE CENTERS		
Deadhorse Facility Anchorage Shell Headquarters	907-382-4130 Shell 907-770-3700, CRF 907-865-4900 504-728-4369	
OIL SPILL RESPONSE ORGANIZATIONS		
Alaska Clean Seas (ACS) Address: Main Number Prudhoe Bay ACS Operations Manager North Slope Mutual Aid (if applicable) handled through ACS	Pouch 340022, Prudhoe Bay, Alaska 99734 907-659-2405 907-659-3202 907-659-2405	
ASRC Energy Services (AES) Address: Main Number Anchorage AES Operations Manager	3900 C Street, Anchorage, Alaska 99503 907-339-6200 907-339-6200	
UIC Arctic Response Services (ARS) Address: Main Number Anchorage Activation Number	7260 Homer Drive, Anchorage, AK 99518 907 865-4900 907 465-4900	

NOTE: PLEASE REFER TO TABLE 2.7.1-5 AGENCY AND EXTERNAL NOTIFICATION INFORMATION FOR ADDITIONAL EMERGENCY CONTACT NUMBERS.

**Table 2.7.1-5
 Agency and External Notification Information**

AGENCY	TELEPHONE	FACSIMILE
NRC	800-424-8802	
EPA (NRC will call)	907-271-5083	907-271-3424
Matt Carr (EPA FOOSC) direct line	907-271-3616	907-271-3424
EPA Region 10 – 24 hr Duty Officer	206-553-1264	
ADEC - Business Hours	907-451-2121	907-451-2362
ADEC - after hours and on weekends call ALASKA STATE TROOPERS	800-478-9300	
ADNR - Oil Spill Hotline Recording	907-451-2678	907-451-2751
DOI-OEPC	907-271-5011 907-227-3783 (24 hrs on call) 907-227-3781 (24 hrs on call)	907-271-4102
NSB	907-561-5144 (Anchorage) 907-852-2611 (Barrow)	907-562-1940
NSB Wildlife Department (Office)	907-852-0350	907-852-0351
NSB Planning	907-852-0320	907-852-0322
NSB Risk Management	907-852-0248	907-852-0356
NSB Mayor's Office	907-852-0200	907-852-0337
NSB Disaster Coordinator	907-852-2822, 907-852-6111 (24 hr on call)	907-852-2475
USCG – Sector Anchorage COTP Zone	907-271-6700	907-271-6765
USFWS (Alaska Maritime National Wildlife Refuge)	907-235-6546	907-235-7783
BSEE	907-334-5300	907-334-5302
ADF&G – Fairbanks	907-459-7285	907-452-6410
City of Barrow	907-852-5211	907-852-5871
Inupiat Community of the Arctic Slope	907-852-4227	907-852-4246
Wainwright Mayor Office	907-763-2815	907-763-2811
Traditional Council	907-763-2535	907-763-2576
Native Village of Point Lay	907-833-2775	907-833-2576
Cully Corporation	907-833-2705	907-833-2715
City of Point Hope	907-368-2537	907-368-2835
Tikigaq Corporation	907-368-2235	907-368-2668
Village of Point Hope	907-368-2330	907-368-2332

**Figure 2.7.1-2
Shell Report of Offshore Environmental Incident Form**

(Internal SEPCo HSSE use only) Incident Number _____

Report of Offshore Environmental Incident Form (OF-REI)			
DIRECTIONS: This form is to be used to capture information that will be later entered into the Fountain Incident reporting database. When completing this form, please be as complete and specific as possible. When completing this form using MS Word you will only be able to enter information into the shaded portions of the form or by clicking on the check boxes. You can use the TAB key to move to the right or the DOWN ARROW key to move down on the form. You may also use your mouse to click on the cell that you want to complete.			
Date of Incident	Time of Incident	On SEPCo Premises <input type="checkbox"/> Y <input type="checkbox"/> N	
Incident Headline (Brief description of incident – 50 characters or less on the line below)			
Incident Type and Location Information			
<input type="checkbox"/> Spill <input type="checkbox"/> Exceedance of discharge limits (Noncompliance) <input type="checkbox"/> Produced water sheen <input type="checkbox"/> Material lost overboard <input type="checkbox"/> Complaint <input type="checkbox"/> Fire <input type="checkbox"/> Release <input type="checkbox"/> Other(Describe)			
Field Name	Well No./Rig	Block	Platform
Latitude	Longitude	OCS-G#	
Activity at Location			
<input type="checkbox"/> Drilling/W.O./Completion <input type="checkbox"/> Exploration <input type="checkbox"/> Production <input type="checkbox"/> Construction <input type="checkbox"/> Other			
Specific Operation			
<input type="checkbox"/> Drilling <input type="checkbox"/> Construction <input type="checkbox"/> Operations <input type="checkbox"/> Other <input type="checkbox"/> Workover <input type="checkbox"/> Crane operations <input type="checkbox"/> Well servicing <input type="checkbox"/> Completion <input type="checkbox"/> Equipment handling <input type="checkbox"/> Air transport <input type="checkbox"/> Coil tubing <input type="checkbox"/> Maintenance <input type="checkbox"/> Boat/Ship			
Source (Check all that apply)			
<input type="checkbox"/> Drip pan <input type="checkbox"/> Flowline <input type="checkbox"/> Other surface <input type="checkbox"/> Sump <input type="checkbox"/> Tank/Vessel <input type="checkbox"/> Wellhead <input type="checkbox"/> Flare <input type="checkbox"/> Hoses <input type="checkbox"/> Pipeline <input type="checkbox"/> Rotating equipment <input type="checkbox"/> Transfer equipment <input type="checkbox"/> Other			
Environment Affected			
<input type="checkbox"/> Water <input type="checkbox"/> Air			
What was spilled or released?			
Report spilled or released volume expressing liquid in gallons, dry chemicals in pounds and air emissions in Standard Cubic Feet.			
Gallons (gal)	Pounds (lbs)	Standard Cubic Feet (SCF)	
OIL SPILL INFORMATION			
Slick colors <input type="checkbox"/> Silver/Gray Sheen (spill factor = 0.000004) <input type="checkbox"/> Transitional Dark (spill factor = 0.004) <input type="checkbox"/> Rainbow (spill factor = 0.00004) <input type="checkbox"/> Dark (spill factor = 0.04) <input type="checkbox"/> Metallic (spill factor = 0.0004)			
Size of the slick	feet by	feet	Estimated volume of the spill (feet x feet x 0.624 x spill factor) = gallons
Was the slick <input type="checkbox"/> captured/cleaned up <input type="checkbox"/> allowed to disperse naturally			
How long did the sheen last before natural dispersion or cleaned up? hours			
Weather Information			
Est. current speed	Direction (to)	Estimated wave height	Est. wind speed Direction (from)
Visibility(nautical miles)		Ceiling (feet)	Ambient temp. (°F.)
Liquid Spill Properties			
API Gravity		Pour Point	
Source Control			
Describe how and when the source of the spill or discharge was stopped			
Describe what was/will be done specifically to prevent reoccurrence? (Procedures changed, equipment repaired, etc)			
What was the cost of repairs/cleanup (Include equipment, repair time, transportation, etc.)			
EXCEEDANCE OF DISCHARGE LIMITS (NONCOMPLIANCE)			
Did a sample fail a Permit test? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Static sheen <input type="checkbox"/> Produced H ₂ O sheen			
Oil and Grease	mg/l	Sanitary chlorine	mg/l Toxicity ppm
Full Description (How did the incident occur?) (Attach additional sheets, if necessary, to complete event description)			

**Figure 2.7.1-2 (Continued)
 Shell Report Of Offshore Environmental Incident Form**

(Internal SEPCo HSE use only) Incident Number _____

INCIDENT EFFECTS					
Environmental	<input type="checkbox"/> Inside impermeable containment/building	<input type="checkbox"/> Gravel surface (roadway or pad)	<input type="checkbox"/> Tundra	<input type="checkbox"/> Confined water body	<input type="checkbox"/> Unconfined or flowing water body
Assets <input type="checkbox"/> None	<input type="checkbox"/> No disruption to operation	<input type="checkbox"/> Brief disruption	<input type="checkbox"/> Partial shutdown, can be restarted	<input type="checkbox"/> Partial operational loss up to 2 weeks	<input type="checkbox"/> Substantial or total loss of operation
Reputational <input type="checkbox"/> None	<input type="checkbox"/> Slight	<input type="checkbox"/> Limited	<input type="checkbox"/> Considerable	<input type="checkbox"/> Major National	<input type="checkbox"/> Major International
Type of Complaint <input type="checkbox"/> (Check if none)					
<input type="checkbox"/> Blast/Vibration <input type="checkbox"/> Lights <input type="checkbox"/> Odor/Fumes <input type="checkbox"/> Debris <input type="checkbox"/> Noise <input type="checkbox"/> Oil Spray <input type="checkbox"/> Smoke <input type="checkbox"/> Flaring <input type="checkbox"/> Other (describe)					
NOTIFICATIONS					
	Notified	Person's Name	Date / Time	Report number	
External Notifications					
National Response Center 1-800-424-8802 (If delegated to by Incident Commander)	<input type="checkbox"/>		/		
Alaska Department of Environmental Conservation 907-451-2121 (Business hours) 1-800-478-9300 (After hours & weekends)	<input type="checkbox"/>		/		
North Slope Borough 907-852-0320 (Planning)	<input type="checkbox"/>		/		
United States Coast Guard 907-271-6700	<input type="checkbox"/>		/		
BSEE 907-334-5300	<input type="checkbox"/>		/		
Internal Notifications (all incidents)					
Incident Commander	<input type="checkbox"/>		/		
Area Leader/Drilling Superintendent	<input type="checkbox"/>		/		
	<input type="checkbox"/>		/		
Witness(es) to the Incident					
Name (Typed or Printed)		Employer		Phone	
<p><i>I certify that all the above information is true, accurate and complete. Under Federal law, penalties can be assessed for recording false information including fines and imprisonment.</i></p>					
Report submitted by					
Name (Typed or Printed)	Title	Phone	Date		
Approvals and/or reviewers					
Name (Typed or Printed)	Title	Phone	Date		

Contact the HSE Incident Management Process Gatekeeper for your organization for submission instructions.

2.7.1.2 External Notification Procedures

Appropriate agency verbal notifications and written reports may include:

- NRC
- BSEE
- BLM
- USFWS
- EPA
- USCG
- DOI
- DOT
- ADEC
- ADF&G
- ADNR
- NOAA, NMFS
- NSB
- Village of Barrow
- Village of Wainwright
- Village of Point Lay
- Village of Point Hope

See Table 2.7.1-5 for contact information.

2.7.1.3 Written Reporting Requirements

Depending on the type and amount of material spilled, individual government agencies have requirements for written reporting, which are the responsibility of Shell. BSEE, USCG, and ADEC reporting requirements will be met. Agency and external notification contacts are listed in Table 2.7.1-5 and agency reporting requirements are summarized in Table 2.7.1-6.

BSEE regulations require all applicable federal, state, and regulatory agencies be notified.

**Table 2.7.1-6
Agency Reporting Requirements for Oil Spills**

		ENVIRONMENTAL COMPLIANCE INITIAL AGENCY NOTIFICATION										ADMINISTRATIVE WRITTEN REPORT (facsimile is acceptable)				
		AS SOON AS POSSIBLE				WITHIN 48 HR	MONTHLY			IMMEDIATE OR AS SHOWN BELOW			5 DAYS AFTER LOSS	15 DAYS AFTER LOSS	15 DAYS AFTER CLEANUP	30 DAYS AFTER EVENT
					SPECIFIC CONDITIONS		ADEC NSB ADNR	ADEC NSB ADNR	FEDERAL LAND ONLY BLM ¹⁰	DOT	SPCO FAX W/IN 48 HR	AOGCC ³ CRUDE GAS				
		NRC EPA	ADEC ADNR	NSB	USCG ⁴ BSEE ⁵ ADF&G ⁶	ADEC ⁸ ADNR NSB							DOT ¹¹ SPCO			
OFFSHORE (DISCHARGES TO WATER)¹																
Sewage ⁹	Any quantity	X	X										X	X		
Any oil or chemical spill	(e.g., oil, drilling fluids, glycol, produced water, or brine)	X	X	X	X			X			X	X	X	X		
Seawater	To seawater environment (no report)															
	Any amount seawater to freshwater environment	X	X	X	X			X					X	X		
STAGING AREA																
Chemicals	Exceeds federal RQ ²	X	X	>55 gal				X					>420 gal	X		
	Less than RQ, or has no RQ		X	>55 gal				X						X		
Selected Hazardous Substances ¹³	>55 gal		X	X				X						X		
	10 to 55 gal							X	X					X		
	<10 gal (no report)															
Seawater	To seawater environment (no report)															
	>55 gal to freshwater environment					X		X					>420 gal	X		
	10 to 55 gal to freshwater environment						X	X						X		
	<10 gal to freshwater environment (no report)															
Sewage ⁹	Any quantity					X ⁹								X		
Oil	>42 gal		X	X				X			X	X	>420 gal or 50 mcf gas	X		
	10 to 42 gal					X		X			>25 gal	X		X		
	1 to 10 gal (<1 gal = no report)						X	X				X		X		
IN CONTAINMENT																
Chemicals	Air release, with RQ	X	X					X						X		
	Less than RQ or has no RQ ¹³															
Sewage ⁹	Any quantity (no report)															
Oil, Glycol, and Select Hazardous Substances ¹³	>55 gal (less than = no report)		X					X			X	X	>420 gal or 50 mcf gas	X		

Notes: "Oil" includes crude, diesel, gasoline, hydraulic fluid, transmission fluid, and therminol.

1. Reporting requirements for discharges within State of Alaska Territorial Waters.
2. Chemicals with federal RQs include ethylene glycol at 540 gal; methanol (pure) at 750 gal. Chemicals without RQs include sewage, produced water, and seawater.
3. For state-regulated wells: Crude oil spills >25 gal; notify AOGCC North Slope Representative. Crude oil spills >10 bbl, notify AOGCC North Slope Representative.
4. All oil spills to or threatening navigable waters.
5. Offshore rig spills <42 gal, call NRC. Notify BSEE (Regional Field Supervisor) for oil spills >42 gal.
6. Any release to fish-bearing water bodies.
7. EPA letter required for oil spills >1,000 gal, all off-pad oil spills and storm water releases of oil or chemicals >RQ.
8. Sewage spills, including domestic wastewater and gray water, spills are reportable to ADEC Wastewater Program; written report due 7 days after event.
9. No notification required for snow-covered tundra unless >4,200 gal, or unless penetrates tundra.
10. See off-pad, on-pad, ice pad/ice roads, and in-containment reporting requirements to determine reporting to these agencies.
11. Glycols, brines, drilling fluids, seawater, produced water, or methanol diluted with 40% or more water.
12. Detailed report must be submitted to EPA within 60 days if oil discharge is over 1,000 gal in a single event or more than 42 gal of oil in each of two discharges within any 12-month period.
13. Field Environmentalist must evaluate available information (MSDS, test data, or process knowledge) to determine if spilled substance is a hazardous substance. Reporting is not required if a non-hazardous determination is made.
14. BSEE requires written report 15 days after loss for spills greater than 42 gal.

2.7.2 Spill Assessment [30 CFR 254.23(g)(2)]

Methods to assess spills are defined in detail in the Shell Tactics Manual and ACS Technical Manual. These may include tactics for detection and delineation, discharge tracking, spill volume estimation, and trajectory modeling, as identified in Table 2.7.2-1.

**Table 2.7.2-1
Spill Assessment Tactics References**

SPILL ASSESSMENT CATEGORY	MANUAL	TACTIC ID	TACTIC
Detection and Delineation	ACS	T-1	Delineation of Oiled Snow or Tundra
		T-3	Detection and Delineation of Under-Ice Oil
Discharge Tracking	ACS	T-2	Mapping and Surveillance of Spill on Land
		T-4	Discharge Tracking in Open Water
		T-4A	Discharge Tracking in Ice
	Shell	TS-1	Tracking Oil Discharge in Open Water
Trajectory Modeling	ACS	T-5	Trajectory Calculations
		T-6	Blowout Modeling
	Shell	TS-3	Trajectory Modeling
Spill Volume Estimation	ACS	T-7	Spill Volume Estimation
	Shell	TS-2	Spill Volume Estimation

Depending upon the incident, access to resources to implement the spill assessment tactics are presented in Appendix A and Appendix G. Additional information on agreements that provide for access to MSAs, mutual aid agreements, or commercially available suppliers is provided within these appendices. Through Shell’s OSRO memberships (ACS and MSRC) and contracted services with ARS and AES-RO, trained personnel from these organizations are available 24 hours per day, seven days per week to deploy and operate spill-response equipment. Required mobilization times for these resources depends on the spill event. Mobilization times, for equipment that is not pre-staged, are described in the Shell Tactics and ACS Tactics. The numbers and specific types of personnel required for response also depends upon incident-specific needs.

Oil location and movement is identified and tracked primarily through the combination of visual observations, aided where practicable by GPS devices and spill tracking software, and commercially available remote sensing techniques. Locating and accurately monitoring an oil slick is important so that meaningful decisions can be made regarding containment and recovery operations and the potential use of non-mechanical response methods.

Aircraft would be used, along with OSR vessel-mounted IR systems and OSRO-provided hand-held systems, to locate the source of the spill and the aerial distribution of any resulting slick. Based upon availability and weather conditions, Shell would activate their helicopter or an available aircraft through ACS that is equipped with FLIR. Additional resources include vessel-mounted IR systems on board the OSR vessels and alternative commercially available aircraft with SAR.

Size and volume of the spill would be determined using the areal extent of the oil, based on GPS boundaries and percentage coverage of oil on water. Slick size and color would be documented using photographs and annotated maps, to provide estimation of oil thickness and quantity through color, and inference from Oil Code Thickness and Concentration Values.

Response vessels are capable of deploying buoys with transmitters. Each tracking buoy is equipped with a transmitter that can be monitored by a receiver located either on a boat or aircraft.

Shell may engage ASA, TRG, and/or NOAA (via ADIOS) to augment trajectory modeling capabilities. In the event of a spill, trajectory models will be based on observed and modeled currents, wind speed, and direction. Vector addition and trajectory modeling may be used to forecast oil movement. Surveillance personnel reports provide coordinates of the leading edge and trailing edge of the slick to feed into, validate, and update spill trajectories.

Continued surveillance during oil spill cleanup operations is important as a means of monitoring operations, conducting a coordinated response, and observing spill migration and spreading. Surveillance will be continued until response operations are complete. Oil location information is digitized and transferred to the IMT for response planning and trajectory modeling. Information is also gathered from the field and fed into the spill management process through the Situation Unit. Spill tracking information is important to the Command Staff to plan strategies and tactics to address UC objectives.

2.7.3 Sensitive Areas [30 CFR 254.23(g)(3)]

Shell has organized their approach to spill response in the Chukchi Sea based upon dedicated response assets as described in Appendix A. These assets, such as the OSR vessel, have been outfitted with equipment that is appropriate for the use in this environment and provides for alternative response techniques. Please refer to Appendix A for additional information on the available assets and response equipment on each TF referenced in Section 2.7 of this document.

Methods to identify and prioritize sensitive areas and areas of special economic and environmental importance are detailed in the Shell Tactics Manual and ACS Technical Manual. These may include, but are not limited to, those identified in Table 2.7.3-1.

**Table 2.7.3-1
 Sensitive Area Prioritization Tactics References**

PRIORITIZATION CATEGORY	MANUAL	TACTIC ID	TACTIC
Sensitive Areas	ACS	W-1	Wildlife Protection Strategy and Permits
		W-2	Wildlife Hazing Equipment
		W-2B	Bird Hazing
		W-6	Identifying and Protecting Sensitive Areas
	Shell	SR-1	Shoreline Assessment

Priority protection sites are identified by the EU based upon oil tracking and trajectory predictions and in consultation with resource agencies and trustees. For the protection of ESAs, the IMT will plan for mitigation of impacts of a spill, or to monitor over-season migration of oil in the ice.

In addition to the consideration of appropriate shoreline tactics and equipment, an assessment has been conducted of the Chukchi Sea shoreline from Point Barrow to Cape Lisburne to identify priority protection sites or sensitive areas. The assessment included identification of control sites where defensive measures such as exclusion or protection tactics would most effectively protect valuable resources. Maps identified in Table 2.7.3-2, Figure 2.7.3-1, and the ACS Map Atlas, present the priority protection control sites.

The coastal area assessment considered the following factors:

- The potential for oil impact, and the nature and magnitude of possible oil retention (substrate, grain size, beach slope, and wave and tidal energy);
- The sensitivity of biological and human use/cultural resources at risk;
- The type and amount of resources (personnel, boats, skimmers, and booms) required for shoreline protection and cleanup; and
- The weather and environmental conditions (prevailing and extreme events) that would most influence the performance of personnel and equipment.

An important step in the assessment process is the ranking of shoreline sensitivity. Ranking involves a careful evaluation of the relationships between physical processes, the nature and amount of oil that could reach a given shoreline, the shoreline type and substrate, oil fate and effects, and sediment-transport patterns. The intensity of energy expended on a shoreline by wave action, tidal currents (though small in the Chukchi Sea), and river currents directly affects the persistence of stranded oil. The need for shoreline cleanup activities is determined, in part, by the speed with which natural processes might remove oil that is stranded on the shoreline, and the prioritization of areas where natural forces are relatively weak or absent (e.g., tidal flats and marshes). All of these processes and oil/shoreline interactions are used in the development and use of ESI values.

One of the best sources of environmental sensitivity ranking for the region of interest is the *Sensitivity of Coastal Environments and Wildlife to Spilled Oil, North Slope, Alaska, Atlas* (North Slope Atlas), supported by NOAA, Oil Spill Recovery Institute in Cordova, Alaska, CHADUX Corporation, ACS, and BOEM. The ESI rankings reflect the fact that areas exposed to high levels of physical energy generally have low biological activity and rank low on a scale of 1 to 10. However, sheltered areas commonly have higher biological activity and rank the highest. The following list (extracted from the North Slope ESI) provides the ranking of shoreline habitats for the Chukchi Sea shoreline:

- 1A Exposed Rocky Shores
- 1B Exposed, Solid Man-Made Structures
- 3A Fine- to Medium-Grained Sand Beaches
- 3C Tundra Cliffs
- 4 Coarse-Grained Sand Beaches
- 5 Mixed Sand and Gravel Beaches
- 6A Gravel Beaches
- 6B Riprap
- 7 Exposed Tidal Flats
- 8A Sheltered Rocky Shores and Sheltered Scarps in Mud and Clay
- 8E Peat Shorelines

- 9A Sheltered Tidal Flats
- 9B Sheltered, Vegetated Low Banks
- 10A Salt- and Brackish-Water Marsh
- 10E Inundated Low-Lying Tundra

Wildlife at risk from exposure to spilled oil or the cleanup process is often, but not always, tied to shoreline sensitivities and is a critical element when considering priority protection sites. Biological information about animal and plant species is also provided in the North Slope Atlas. The species are divided into the following groups and subgroups:

- Birds (diving birds, gulls and terns, seabirds, shorebirds, and waterfowl);
- Fish;
- Marine Mammals (pinnipeds, polar bears, walrus, and whales);
- Terrestrial Mammals (bears, caribou, and musk ox); and
- Benthic Habitats (kelp).

The environmental sensitivity rankings, together with information about biological resources, sea ice, and human-use resources provided in the North Slope Atlas, are important to the selection of areas identified as priority protection sites. The NSSAWG, consisting of representatives from several federal, state, and local government agencies and industry organizations, has worked with a wide range of experts to evaluate the environmental sensitivity rankings, and identify specific areas along the Chukchi shoreline that should be recognized as priority protection sites. Table 2.7.3-2 lists the priority protection control sites identified by the NSSAWG.

Working closely with the NSSAWG, ACS developed Volume 2 of their Technical Manual, the ACS Map Atlas, which includes a comprehensive set of shoreline maps where priority protection sites are identified (refer to ACS Map Atlas for priority protection control sites along the Chukchi Sea coastline). Shell has used the ESI rankings provided in the North Slope Atlas, along with the priority protection sites indicated in the ACS Map Atlas, to consider the nature and extent of resources (vessels, barges, booms, skimmers, response equipment, and personnel) to provide a timely and effective nearshore and shoreline response.

Shell has also identified biological resources using an unpublished report by WCC, Walnut Creek, California, to NOAA Assessment Division, Anchorage, Alaska (Robilliard et.al. 1985, *Chukchi Sea Coastal Studies: Coastal Geomorphology, Environmental Sensitivity, and Persistence of Spilled Oil*). This report identifies key biological resources in the region of concern including: spotted seals, beluga whales, alcids (murre and puffins), sea birds (kittiwakes and gulls), waterfowl (eider, oldsquaw, and black brant) and shorebirds. Most of the shorelines of primary biological concern are in the Kasegaluk Lagoon portion of the coast, particularly the Icy Cape region. For example, black brant are key migratory birds in the Icy Cape and Peard Bay region that move north in the spring (June) migration, and return south in the late August to September migration. The northern portion of the shoreline is of lower primary concern as there are few wetlands and seabird colonies or waterfowl nesting areas. However, in the south, the Cape Lewis, Cape Lisburne, and Point Thompson bedrock cliffs support large seabird colonies.

**Table 2.7.3-2
 Shoreline Protection Assessment for Point Barrow to Cape Lisburne**

PRIORITY PROTECTION SITES	ACS MAP REFERENCE	LATITUDE	LONGITUDE	TACTICS (SHELL / ACS)
PPS-168	255	70° 49' 53.185" N	158° 1' 39.197" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-169	255	70° 49' 13.442" N	158° 9' 37.538" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPA-6	254	70° 53' 42.218" N	158° 37' 30.199" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-170	254	70° 47' 8.256" N	158° 46' 27.046" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-171	254	70° 49' 0.019" N	159° 5' 18.898" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-172	253	70° 48' 37.548" N	159° 34' 13.815" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-173	253	70° 47' 38.500" N	159° 38' 39.616" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-174	251	70° 41' 41.453" N	159° 54' 18.290" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-175	250	70° 36' 23.573" N	160° 6' 28.296" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-176	250	70° 33' 45.189" N	160° 12' 35.011" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-177	250	70° 32' 26.343" N	160° 15' 55.944" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-178	250	70° 32' 4.490" N	160° 16' 37.355" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-179	250	70° 30' 50.004" N	160° 20' 1.004" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-180	247	70° 26' 25.354" N	160° 33' 39.330" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-181	245	70° 22' 22.289" N	160° 48' 53.117" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-182	245	70° 19' 43.550" N	161° 4' 14.960" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-183	244	70° 17' 35.105" N	161° 17' 40.446" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-184	243	70° 18' 2.618" N	161° 57' 2.174" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-185	243	70° 15' 48.348" N	162° 5' 6.019" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-186	240	70° 5' 3.034" N	162° 30' 33.825" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-187	239	69° 53' 57.607" N	162° 49' 46.298" W	SR-2, SR-3, or SR-4 / C-13 or C-14

**Table 2.7.3-2
Shoreline Protection Assessment for Point Barrow to Cape Lisburne (Continued)**

PRIORITY PROTECTION SITES	ACS MAP REFERENCE	LATITUDE	LONGITUDE	TACTICS (SHELL / ACS)
PPS-188	238	69° 45' 44.075" N	162° 57' 54.774" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-189	237	69° 44' 47.162" N	163° 3' 39.277" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-190	237	69° 40' 22.579" N	163° 6' 2.442" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-191	235	69° 27' 23.872" N	163° 8' 26.842" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-192	235	69° 24' 53.101" N	163° 8' 23.636" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-193	233	69° 15' 17.732" N	163° 19' 39.914" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-194	233	69° 14' 8.612" N	163° 21' 28.840" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-195	233	69° 12' 3.518" N	163° 26' 15.885" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-196	232	69° 8' 22.200" N	163° 31' 47.420" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-197	230	68° 54' 51.072" N	164° 37' 17.810" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-198	229	68° 53' 29.219" N	164° 53' 44.537" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-199	228	68° 51' 38.879" N	165° 47' 27.582" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-200	223	68° 25' 10.566" N	166° 23' 36.592" W	SR-2, SR-3, or SR-4 / C-13 or C-14
PPS-201	223	68° 20' 18.368" N	166° 50' 40.762" W	SR-2, SR-3, or SR-4 / C-13 or C-14

At this time, seven general locations have been identified as primary protection areas or coastal sites on the Chukchi Sea coast (refer to ACS Map Atlas Sheets 194, 195, 198, 223, 227, 228, 234 to 239, 243 – 245, 247 – 250, 253 – 255, and Table 2.7.3-2 for the protection control sites listed within these general locations). The identification of these recommended primary protection priorities is based on a combination of the biological resources at risk and existing human use activities. The seven primary protection areas are:

- Barrow*
- Peard Bay - Franklin Spit
- Wainwright Inlet
- Icy Cape
- Central Kasegaluk Lagoon (Kukpowruk Pass to Akunik Pass)
- Cape Lisburne - Cape Lewis*
- Marryat Inlet.*

Three of the seven areas listed above shown with an asterisk (*) are considered to have a low risk of oil impact because of the distance, time, and low likelihood for oil to make landfall and the

lengthy response time window of opportunity. Five of these seven areas are characterized by a sheltered lagoon environment which is connected to the Chukchi Sea by a tidal inlet or inlets where protection tactics could be deployed to prevent oil entering the lagoon (Peard Bay-Franklin Spit; Wainwright Inlet; Icy Cape, Central Kasegaluk Lagoon; and Marryat Inlet).

Two coastal locations (Barrow and Cape Lisburne-Cape Lewis) are open coast environments where the resources at risk are at sea in the adjacent nearshore environment, rather than in lagoon environments. In the case of Barrow, the community is located at the shoreline. A distinction is made between the five primary protection strategic coastal areas, which cover relatively large geographic area and for which a regional scale response strategy would be required, and two site-specific primary protection shoreline locations (Wainwright Inlet and Marryat Inlet) for which a single inlet protection strategy would be appropriate.

In addition, four recommended site-specific secondary areas have been identified. The identification of these recommended secondary protection priorities is also based on a combination of the biological resources at risk and human use activities. These are considered secondary priorities as the areas at risk are small in area compared to the recommended primary protection priorities. The secondary areas are:

- Will Rogers Memorial
- Sinaruruk River
- Pitemegea River *
- Ayugatak Creek.*


The asterisk (*) indicates that two of these four locations are considered to have a low risk of oil impact because of the distance and time for oil to make landfall and the lengthy response time window of opportunity. All four areas have a single tidal inlet or river entrance where protection tactics could be deployed to prevent oil entering the river or estuary.

Other potential protection locations exist including possible lagoon tidal inlets or open river mouths. Evolving marine mammal use is also an important consideration when selecting sites for protection. For example, the distribution and habitat use by Pacific walrus varies year by year, as it is closely associated with presence or absence of pack ice in the nearshore areas. Walrus tend to use pack ice for the haulouts, except for the cases when the pack ice retreats too far offshore, in which case they use beaches as haulout locations. Walrus may arrive at beach haulouts in late August and leave at the beginning of October. In 2007, large numbers of walrus were observed between Barrow and Point Hope with particularly dense concentrations on the beaches between Point Lay and Wainwright. In the event of a spill and the low likelihood of it reaching shore, a decision on which protection tactic would be necessary and appropriate would have to be evaluated in consultation with federal and state resource trustees and agencies. Table 2.7.3-3 provides a list of primary contact numbers for agencies and specific agency representatives, who would be consulted for site-specific environmental assessment information.

**Table 2.7.3-3
Site-Specific Environmental Assessment Agency Consultation List**

Federal Agency	Contact	Telephone	Position	Concern
USFWS	Deborah Pierce Williams	907-786-3800	Supervisor	Marine Mammals
	Eric Taylor	907-786-3446 (Direct) 907-786-3443 (Main)	Chief Waterfowl Management Branch	Migratory Birds
	Jeff Adams	907-978-1861	Branch Chief	Fisheries Program
BOEM	Dee Williams	907-334-5283	Section Chief	AK Environmental Studies
NMFS - Protected Resources Division	Brad Smith	907-271-3023 (Direct) 907-586-7253 (Main)	Division Contact	Whales and Seals
NMFS - National Marine Mammal Laboratory	John Bengtson	206-526-4045	Alaska Fisheries Science Center Contact	Alaska Fisheries
Bureau of Land Management	Lon Kelly	907-474-2200	Field Manager	Alaska Region
National Park Service	Sara Wesser	907-644-3699	Regional Inventory & Monitoring Coordinator	Arctic Network Inventory and Monitoring Program
USFWS	Steve Delehanty	907-235-6546	Refuge Manager	Alaska Maritime National Wildlife Refuge
State Agency	Contact	Telephone	Position	Concern
ADF&G	Richard Shideler	907-459-7283	Fairbanks Contact	Grizzly Bears
	Lori Quakenbush	907-459-7214	Fairbanks Contact	Marine Mammals
	Geoff Carroll	907-852-3464	Barrow Contact	All Wildlife
University of Alaska, Fairbanks Institute of Marine Science	Dr. Terry Whitledge	907-474-7229	School of Fisheries and Ocean Sciences	Chemical and Biological Oceanography
ADEC	Nancy Sonafrank	907-451-2726	Division of Water, Water Quality Standards, Assessment, & Restoration	Water Quality
Local Agency	Contact	Telephone	Position	Concern
NSB Department of Wildlife Management	Harry Brower	907-852-0350	Department Contact	All Wildlife
Northwest Arctic Borough	Noah Naylor	907-442-2500	Planning Director	All Wildlife

Figure 2.7.3-1
Chukchi Sea Shoreline Protection
ACS Map Atlas Sheet Index

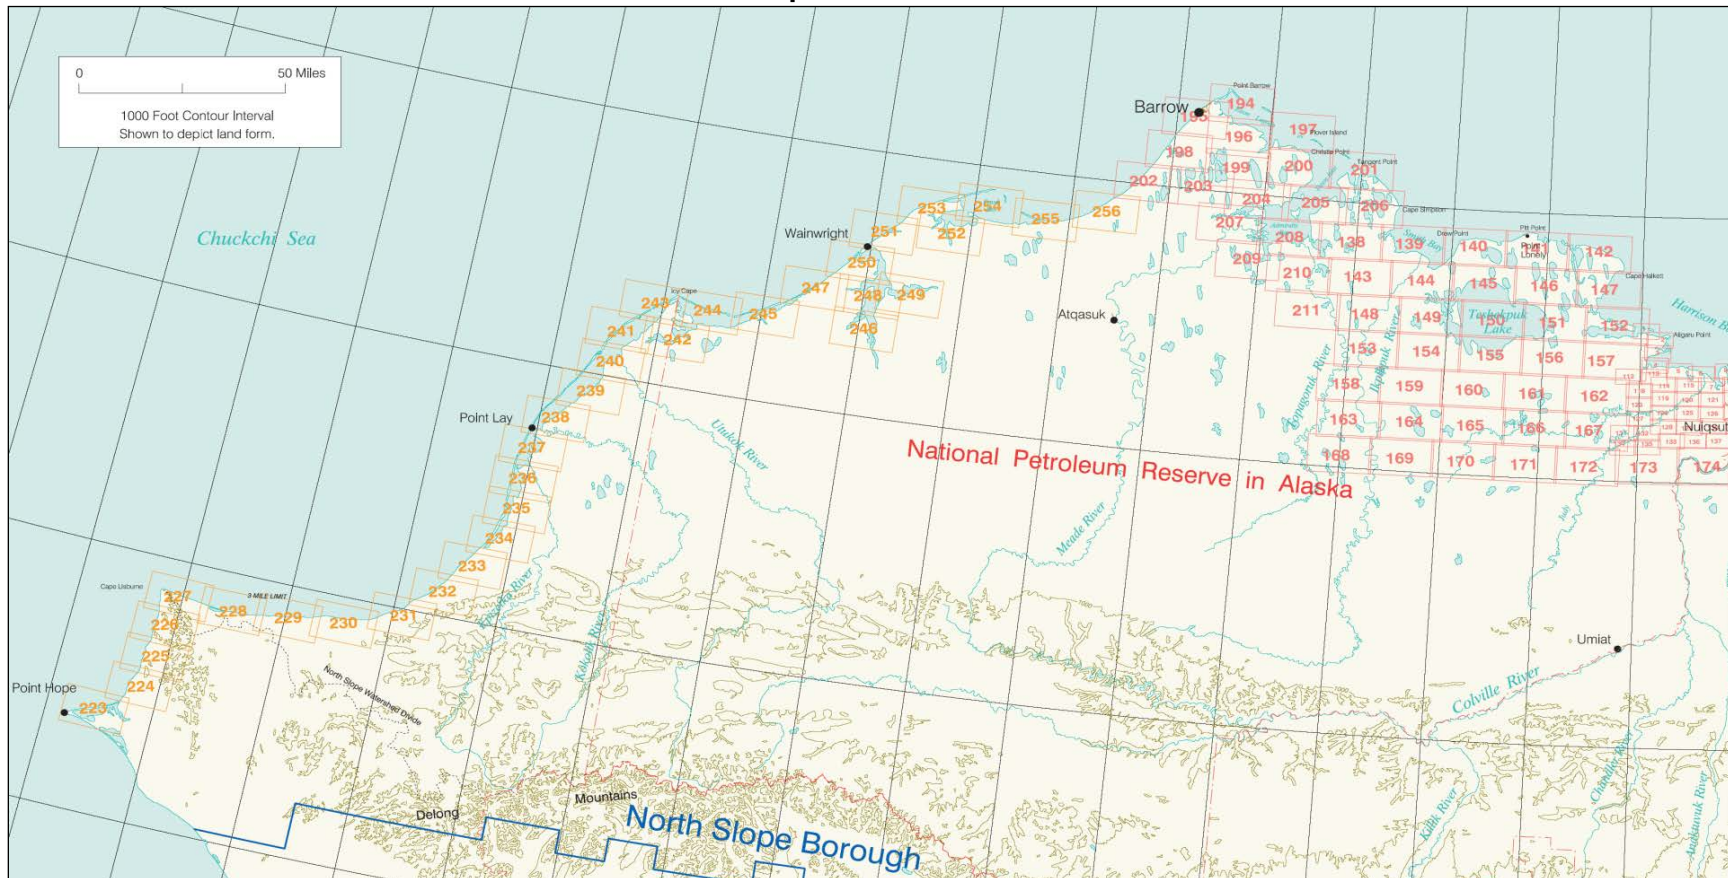

2.7.4 Resource Protection Methods [30 CFR 254.23(g)(4)]

Shell has organized their approach to spill response in the Chukchi Sea based upon dedicated response assets as described in Appendix A. These assets such as the OSR vessel have been outfitted with equipment that is appropriate for the use in this environment and provides for alternative response techniques. Please refer to Appendix A for additional information on the available assets and response equipment on each TF referenced in Section 2.7.

Protection and recovery strategies are also discussed in more detail in the WCD Scenario (Appendix C), the Shell Tactics Manual and ACS Technical Manual. Methods and procedures include, but are not limited to, the tactics outlined in Table 2.7.4-1 below.

**Table 2.7.4-1
 Sensitive Area Protection Tactics Reference**

PROTECTION CATEGORY	MANUAL	TACTIC ID	TACTIC
Offshore	ACS	R-18	U-Boom to Skimmer and Mini-Barge
		R-32A	Single Boom-Arm Skimming
	Shell	OR-1A	Deflection Boom Secured to Large Barge
		OR-2A	Deflection Boom Secured to OSR Vessel
		OR-2C	OSR Vessel Alternatives in Broken Ice
		OR-4A	Deflection Boom and Skimming Vessels
Shoreline and Shoreline and Sensitive Areas	ACS	C-4	Barriers on Land
		C-5	Deflection or Exclusion Booming on Lake or Tundra
		C-13	Deflection Booming in Open Water
		C-14	Exclusion Booming in Open Water
		C-15	Intertidal Booming
	Shell	SR-2	Deflection Booming
		SR-3	Multiple Deflection (Cascading Booms)
		SR-4	Exclusion Booming Near Protection Sites
		SR-5	Shoreside Recovery Trenching
		SR-8	Deluge or Low Pressure Wash
Wildlife	ACS	W-1	Wildlife Protection Strategy and Permits
		W-2	Wildlife Hazing
		W-3	Wildlife Capture and Rehabilitation
		W-4	Salvage of Dead Wildlife
		W-5	Deployment of ACS Mobile Wildlife Stabilization Center
		W-6	Identifying and Protecting Sensitive Areas

Access to resources to implement the sensitive area protection tactics identified are provided within Appendices A, B, and G of this OSRP. Additional information on agreements that provide for access to MSAs, mutual aid agreements or commercially available suppliers is also provided within these appendices. Through Shell’s OSRO memberships (ACS and MSRC), and contracted services with ARS and AES-RO, trained personnel from these organizations are available 24 hours per day, seven days per week to deploy and operate spill-response equipment. Required mobilization times for these resources depends on the spill event. Mobilization times, for equipment that is not pre-staged, are described in the Shell Tactics and ACS Tactics. The numbers and specific types of personnel required for response are also dependent upon incident-specific needs.

Shell's primary approach to resource protection is to contain and recover oil and to remove oil from the environment as quickly as possible to mitigate impact. See Table 2.7.4-1 for a list of tactics that may be implemented. Shell's offshore response is described in the WCD scenario (Appendix C).

For planning purposes, Shell has taken a conservative approach to the development of their OSR program with assumptions made to ensure adequate response capability. To scale the potential shoreline response assets needed, and for planning purposes, Shell based these assets upon the assumption that 10 percent of the 25,000-bopd discharge escapes the primary offshore recovery efforts at the blowout. This unrecovered 2,500 bopd is assumed to drift toward the mainland, driven by winds out of the WNW. This wind direction was used for planning purposes and does not correspond to the prevailing E, NE, and ENE wind directions of summer months. In the unlikely event strong, sustained winds develop out of the WNW, trajectory modeling estimates that six days is the earliest possible time oil could reach shore, even if no containment and recovery operations were conducted. TF-6, consisting of a large, mobile OSR barge and tug, would be mobilized from its staging location and arrive within 96 hr in the nearshore zone of the Chukchi Sea in order to best intercept and recover oil potentially threatening the coast, as water depth, weather, sea conditions and other circumstances allow. TF-6 would be capable of transit speeds of 5 knots, ensuring arrival by Hour 96. From this location, the TF may be mobilized into the nearshore zone well ahead of the predicted timeframe that oil would reach shorelines for oil recovery and support the shoreline protection task force. TF-6 would be dispatched as needed to intercept the oil as described in the scenario. It is assumed that half of the oil reaching the nearshore environment is recovered by the skimming systems dispatched from TF-6. The remaining 1,250 bopd are assumed to migrate toward the shoreline where ARS and ACS would mobilize personnel and equipment to intercept the oil and deploy boom for shoreline protection. TF-6 possesses 18,636 bbl of fluid storage capacity for oil recovered from the nearshore operations. For planning purposes, 17,000 bbl is used as the nominal capacity of the Nearshore OSR barge for recovered fluids.

Protection sites PS-168 through PS-174 have been prioritized as the most likely sites to be protected first. Table 2.7.3-2 identifies the corresponding ACS Map Atlas reference and the protection tactic for each of these protection sites. For a general discussion regarding how these sites were identified, please refer to Section 2.7.3, Sensitive Areas.

Shoreline recovery operations are staffed by ARS and ACS personnel supplemented with NSSRT, ACRT, and VRT responders as needed (reference Appendix A and ACS Tactics L-8 and L-9). Shoreline protection and recovery task forces set up and maintain multiple teams along the shoreline to recover oil. For planning purposes, each task force maintains a minimum of six teams that deploy boom to intercept oil moving along the shoreline, a small skimmer, and Fastanks or bladders set up on the beach to hold the recovered liquids or oily waste and debris. The shoreline response teams have access to numerous storage containers (e.g., Fastanks) for oily waste storage along the shoreline. Additional temporary storage will be provided as needed using lined pits, drums, bladders and other storage containers flown in by helicopter or transported to the areas of need with landing craft. Authorization would be sought prior to burning of oily solids (e.g., wood, vegetation and other combustible materials) at approved onshore burn sites after a careful assessment of the risks and benefits of various controlled burns.

The primary objective of wildlife protection strategies is to protect wildlife by preventing birds and mammals from entering spill or containment areas. Coordination with agency representatives would be mandatory and is further detailed within the Wildlife Response Plan (Appendix I). Containment areas will be monitored until USFWS and/or ADF&G determine that

monitoring is no longer required. In general, wildlife protection strategies include, but are not limited to:

- Containment and controls to limit the spread of oil, and the area influenced by the spill and response options;
- Divert oil from most sensitive areas;
- The drillship will have at least one on-duty PSO on board at all times, which is considered BAT for wildlife monitoring;
- Hazing of birds and mammals;
- Capture and relocation of wildlife in direct threat; and
- Aircraft monitoring.

Priorities for protection may change based on weather, sea state, oil condition, hours of daylight, and other factors. Reports from the field monitoring and tracking of the trajectory will be considered by the EU, in consultation with appropriate resource trustees, and may be modified as necessary.

2.7.5 Response Asset Mobilization, Deployment, and Support [30 CFR 254.23(g)(5)]

Methods to ensure containment and recovery equipment as well as the response personnel are mobilized at the spill site are described in detail in the ACS Technical Manual. These may include deployment strategies, logistics, communications, staging areas, and activation of additional resources, among others. Specific tactics are identified and described in Table 2.7.5-1. On-water assets have personnel directly associated with them as described in Appendix A (Response Equipment) and Appendix C (WCD Scenario).

Shell has organized their approach to spill response in the Chukchi Sea based upon dedicated response assets as described in Appendix A (Response Equipment) and Appendix C (WCD Scenario). These assets, such as the OSR vessel, have been outfitted with equipment that is appropriate for use in this environment and provide for a variety of response tactics. Please refer to Appendix A for additional information on the available assets and response equipment on each TF referenced in this section.

**Table 2.7.5-1
 Equipment Mobilization and Deployment (Logistics) Tactics References**

LOGISTICS CATEGORY	MANUAL	TACTIC ID	TACTIC
Response Asset Mobilization, Deployment, and Support	ACS	L-2	Staging Areas
		L-3	Deployment Strategies
		L-4	Logistical Support
		L-5	Communications
		L-7	Realistic Maximum Operating Limitations
		L-8	North Slope Mutual Aid
		L-9	Accessing Contract Resources
		L-10	Accessing Non-Obligated Resources
		L-12	Logistical Support for On-Water Obligations

Mobilization and deployment of spill response equipment and personnel strategy will conform to the Spill Classification Guidelines (Tiers) as described in the Emergency Action Checklist in Section 1.1. Mobilization of equipment and personnel may be accomplished through the use of

mutual aid agreements and MSAs as listed in the above-referenced Tactics from the ACS Technical Manual and through the transportation options listed in Table 2.7.5-2.

Equipment mobilization is described in Appendix C (WCD Scenario) for the TFs described in Appendix A. The drillship will have TF-1 and TF-2 on standby within its vicinity during drilling operations into liquid hydrocarbon-bearing zones. The drillship will carry equipment, personnel, and supplies to handle minor operational spills.

Oil spill personnel on board the offshore OSR assets are available to respond rapidly to an on-site emergency. The mobilization of additional staff and equipment to support the OSR effort will be progressively mobilized as follows:

- From existing call-out arrangements under ACS;
- ACRT personnel as well as equipment may be provided through ACS to supplement the offshore, nearshore, and shoreline response operations, as necessary;
- VRT personnel may be provided through ACS to supplement the nearshore and shoreline response operations, as necessary;
- NSSRT personnel may be provided for shoreline response operations, as necessary;
- ACS staff off-rotation outside the North Slope operating area (subject to 70 percent availability for planning purposes);
- Other Shell contractors such as ARS; and
- Other qualified staff mobilized from within the Royal Dutch Shell Group in the U.S. and abroad. For notification and mobilization of additional Group staff, contact Shell's SART at 713-241-2532. Through the SART link, access to as many as 2,000 Shell employees is available.

During conditions that may limit helicopter operations, the crews would remain on the vessel and continue emergency operations. Personnel may also be transported via helicopter from the heli-decks located on board either of the supporting vessels or may utilize other small vessels or work boats for transport.

A primary consideration, for initiating mobilization of supplemental out-of-region Tier III offshore response assets, is the on-water distance to the response site. If additional out-of-region resources are indicated, the identification of additional vessels and placement of assets on stand-by would be initiated by Shell early in the response. Information regarding out-of-region resource vendors and logistical considerations are described in Appendix G. Table G-1 provides a list of vendors with additional vessel assets that further defines ACS Tactics L-10 and L-9 equipment sources. Considerations for mobilization and transit of these resources are also presented in Appendix G.

The shallow waters of the near-shore environs provide an additional constraint to mobilization of out-of-region assets, as suitable vessels are limited to those with sufficiently shallow draft to operate in these waters. Suitable vessels are available from contractors with whom ACS has MSAs, including a Crowley 200-Series Barge and River Class Tug located at West Dock (Prudhoe Bay). Travel time for out-of-region vessel assets mobilized to supplement recovery efforts is mitigated by the rapid availability of additional on-shore storage capacity mobilized to Wainwright via air. According to FAA data, (current as of December 15, 2011) area airports, including those at Barrow and Wainwright, see aircraft operations numbers on the order of 3 to 30 per day. For comparison, Ted Stevens Anchorage International Airport posts roughly 800 aircraft operations per day. As utilization of the North Slope area facilities is low, scheduling limitations should not arise.

The Wainwright airport provides suitable capacity for landing C-130A fixed-wing aircraft, which may be utilized to transport additional response assets to Wainwright from Deadhorse within an hour. Out-of-region assets from MSA contractors, staged in Anchorage, may be transported to Wainwright within three hours. Once in Wainwright, assets would be deployed as appropriate to the recovery sites, thereby increasing storage capacity onshore while additional vessels may be mobilized.

Wainwright is the forward staging site for support of near- and onshore recovery operations, from which Olgoonik Corporation is the logistics contractor providing support services. From Wainwright, landing crafts would provide shuttle services and logistical support to forward recovery operations. Travel times from Wainwright to individual recovery sites are less than two hours. The Wainwright airport provides coastal access to potential coastal staging areas.

Transport Procedures

Actual response and mobilization times will vary depending on a variety of factors, such as weather, personnel safety, and wildlife considerations. During adverse weather conditions that prohibit the transport of equipment, personnel, and other resources to the spill site, spill response would be conducted solely by on-site personnel and equipment. Sufficient response personnel are stationed on the vessels to staff for two 12-hr shifts as listed in Table C-4 of Appendix C.

The estimated response time, from discovery of a spill at the drill site to the deployment of equipment, varies depending on the incident causing the spill, the size of the spill, time of year, logistical support, and available information.

**Table 2.7.5-2
 Transportation Options**

MODES OF TRANSPORTATION	SEASON		
	DRILLING	BREAKUP/FREEZEUP	WINTER
Helicopters	X ¹	X ¹	X ¹
Fixed-wing Aircraft	X ¹	X ¹	X ¹
Vessels	X	Conditional ²	Conditional ²
Vehicles/Heavy Equipment	--	--	Conditional ²
Heavy ATV	--	--	Conditional ²

¹ Weather dependent

² Dependent upon ice conditions

Pre-staged Equipment

Appendix A describes the equipment and personnel pre-staged at Wainwright that would be used to initiate and support shoreline response. Pre-staged equipment would be inspected monthly throughout the drilling season to ensure it is secure and ready for deployment in the event of an emergency. Inspections of response equipment would be performed by ARS as part of their periodic maintenance system, and the inspection records would be maintained through ARS.

Equipment available through Shell’s OSRO and response contractors has been scaled to fulfill specific shoreline protection strategies. Shoreline response personnel would be pre-staged at Wainwright and may be supported from mobile shore-based facilities during a response. Trajectory modeling shows that, assuming uncharacteristic strong and steady W and WNW

winds, oil may reach shore in six days at the earliest possible time, allowing sufficient time to establish support facilities in proximity to UC-designated priority protection sites.

Air Access

The drillship can accommodate helicopter operations. Air operations may be limited by weather conditions, as discussed in Appendix H.

Fixed-wing aircraft can transport personnel and equipment to airstrips located at Barrow, Wainwright, Point Lay, or Point Hope. These airstrips provide coastal access and can serve as logistical hubs for shoreline protection or cleanup efforts.

Pre-Approval Mobilization of Dispersant Assets

When dispersants are determined to be a strategic response, assets necessary to provide for aerial dispersal application would be mobilized by the IC prior to actual approval of their use. These assets, mobilized through MSRC, would be staged at Shell’s hangar at the Barrow airport to ensure availability for deployment in the most efficient manner. Please reference Appendix D (Dispersant Plan) for additional information on dispersant use.

2.7.6 Procedures to Ensure Sufficient Recovered Oil Storage for Continued Recovery Operations [30 CFR 254.23(g)(6)]

Storage equipment for recovery operations, as outlined in Table 2.7.6-1, provides for oil storage capacity in excess of WCD volume recovery requirements.

**Table 2.7.6-1
 Storage Equipment for Recovery Operations**

SUM OF CAPACITY OF OIL STORAGE TANKS		
ELEMENT	PLANNING CAPACITY (bbl)	REFERENCE
OFFSHORE STORAGE		
OSR Vessel	11,400	Shell Charter, available to ACS
OSR Barge	76,900	Shell Charter, available to ACS
VOSS	13,000	Shell Charter, available to ACS
VOSS	8,000	Shell Charter, available to ACS
OST	513,000	Shell Charter, available to ACS
OST	Minimum 250,000	Shell Charter, available to ACS
NEARSHORE STORAGE		
OSR Barge	17,000	Shell Charter, available to ACS
ACS Mini-barges	Response Dependent	ACS Technical Manual
AES-RO Mini-barges	946 (4 x 236)	Shell Tactics Manual
SHORELINE STORAGE		
Fastanks	Response Dependent	Shell Tactics Manual or ACS Technical Manual

Shell maintains on-scene storage capacity in excess of the volume sufficient for the first 24 hours of recovery operations. An OST with a minimum capacity of 513,000 bbl will be located not more than 240 n mi away (less than 24 hours) from the drillship while drilling in liquid hydrocarbon-bearing zones, and will be used for emergency oil spill response. A second Shell-chartered OST would be mobilized and arrive at the drill site by Day 20 with sufficient (minimum 250,000 bbl) capacity to provide storage for the remaining recovered liquids for the duration of the 30-day WCD event.

2.7.7 Procedures to Remove Oil and Oiled Debris from Shallow Waters and Along Shorelines and Rehabilitate Oiled Waterfowl [30 CFR 254.23(g)(7)]

Through Shell’s OSRO memberships (ACS and MSRC) and contracted services with ARS and AES-RO, trained personnel from these organizations are available 24 hours per day, seven days per week to deploy and operate spill-response equipment. Required mobilization times for these resources depends on the spill event. The numbers and specific types of personnel required for response are listed in the tactics. In addition to these entities, there are other contractual vehicles through which trained personnel and equipment are available. For example, ACS has MSAs with numerous (more than 30) contractors (ACS Tactic L-9). APICOM has a mutual aid agreement to provide equipment and personnel to members on an as-available basis. Accessing these resources is described in ACS Tactic L-10, which is also provided in Appendix C. Appendix G provides a list of logistic support vendors and suppliers specific to Alaska.

Shell’s response tactics for removal of oil in offshore waters and to mitigate shallow water impact are implemented by equipment and personnel stationed in the vicinity of the drillship. This equipment and personnel are described in Appendix A. A summary of offshore recovery procedures and tactics that may be applied in a response in the Chukchi Sea are outlined in Table 2.7.7-1 (summer conditions) and Table 2.7.7-2 (varying ice conditions).

**Table 2.7.7-1
 Offshore Recovery Summer Conditions Tactic References**

OFFSHORE RESPONSE CATEGORY	MANUAL	TACTIC ID	TACTIC
Offshore Response	ACS	T-4	Discharge Tracking in Open Water
		T-5	Trajectory Calculations
		T-7	Spill Volume Estimations
		R-18	U-Boom to Skimmer and Mini-Barge
		R-32A	Single Boom-Arm Skimming
	Shell	TS-1	Tracking Oil Discharge in Open Water
		TS-2	Spill Volume Estimation
		TS-3	Trajectory Modeling
		OR-1A	Deflection Boom Secured to Large Barge
		OR-1B	Deflection Boom with Open Apex & Large Barge
		OR-2A	Deflection Boom Secured to OSR Vessel
		OR-2B	Deflection or Containment Boom with OSR Vessel Skimmers
		OR-3A	OSR Vessel / OSR Barge Offloading to Tanker
		OR-4A	Deflection Boom & Skimming Vessels
		OR-4B	Deflection Boom with Open Apex Skimming Vessels
		OR-5A	34-ft Workboat with Portable Skimmer & Intermediate Storage Devices
		OR-5B	34-ft Workboat with Skimmer & Intermediate Storage Devices
		OR-8	Dispersant Spray from OSR Vessel Outriggers
		OR-9A	Aerial Dispersant Application (HERC with ADDS Pack)

**Table 2.7.7-2
 Offshore Recovery in Varying Ice Conditions Tactic References**

OFFSHORE RESPONSE CATEGORY	MANUAL	TACTIC ID	TACTIC
Offshore Response	ACS	B-3	<i>In Situ</i> Burning with Heli-torch and Other Igniters
		B-6	Burn Residue Recovery
		T-4	Discharge Tracking in Open Water
		T-4A	Discharge Tracking in Ice
		T-5	Trajectory Calculations
	Shell	OR-1A	Deflection Boom Secured to Large Barge
		OR-1B	Deflection Boom with Open Apex & Large Barge
		OR-2A	Deflection Boom Secured to OSR Vessel
		OR-2B	Deflection or Containment Boom with OSR Vessel Skimmers
		OR-2C	OSR Vessel Alternatives in Broken Ice
		OR-2D	OSR Vessel Alternatives in Broken Ice
		OR-2E	OSR Vessel Alternatives in Broken Ice
		OR-3A	OSR Vessel / OSR Barge Offloading to Tanker
		OR-4A	Deflection Boom & Skimming Vessels
		OR-4B	Deflection Boom with Open-Apex Skimming Vessels
		OR-4C	Containment Using Outrigger and Boom or Ice with Skimming Vessels
		OR-4D	Containment Using Outrigger and Boom or Ice with Skimming Vessels
		OR-5A	34-ft Workboat with Portable Skimmer & Intermediate Storage Devices
		OR-5B	34-ft Workboat with Skimmer & Intermediate Storage Devices
		OR-6	Offloading Intermediate Storage Devices
OR-7	Fire Boom/Heli-Torch		
OR-8	Dispersant Spray from OSR Vessel Outriggers		
OR-9A	Aerial Dispersant Application (HERC with ADDS Pack)		

Potential cleanup tactics, employed in the unlikely event a spill reaches the Chukchi shoreline include, but are not limited to, those described in the ACS Technical Manual, with additional tactics planned for nearshore and shoreline response described and illustrated in the Shell Tactics Manual (see Table 2.7.7-3). Provided at the end of this section, Figures 2.7.7-1 through 2.7.7-6 illustrate possible variations on these tactics because of the broad range of shoreline, weather, and ice conditions that could exist during the drilling season.

**Table 2.7.7-3
 Nearshore Response Tactics References**

NEARSHORE RESPONSE CATEGORY	MANUAL	TACTIC ID	TACTIC
Shallow Water and Shoreline	ACS	SH-1	Shoreline Assessment
		SH-2	Natural Recovery of an Oiled Shoreline
		SH-3	Shoreline Cleanup Using Flooding and Flushing
		SH-4	Shoreline Cleanup Using Steam Cleaning or Sand Blasting
		SH-5	Shoreline Cleanup Using Manual Removal and Vacuum Methods
		SH-6	Shoreline Cleanup Using Mechanical Removal
		SH-7	Shoreline Cleanup Using Sorbents and Vegetation Cutting
		SH-8	Shoreline Cleanup Using Mechanical Tilling / Aeration
		SH-9	Shoreline Cleanup Using Sediment Reworking and Surf Washing
		SH-10	Shoreline Cleanup Using Burning
		SH-11	Biological / Chemical Shoreline Response Tactics
		SH-12	Summary of Potential Impact of Shoreline Cleanup Techniques
	Shell	SR-1	Shoreline Assessment
		SR-2	Deflection Booming
		SR-3	Multiple Deflection (Cascading Booms)
		SR-4	Exclusion Booms
		SR-5	Diversion Boom with Shoreside Recovery Trench
		SR-6	Passive Recovery (Snare Boom)
		SR-7	Manual Removal, Raking, Tilling
		SR-8	Deluge or Low Pressure Wash
Wildlife & Sensitive Areas	ACS	W-1B	ARRT Capture / Transportation / Stabilization / Treatment Checklist
		W-1C	ARRT Contact Information for Wildlife Resource Agencies
		W-2	Wildlife Hazing Equipment
		W-2A	Mammal Hazing
		W-3	Wildlife Capture and Rehabilitation
		W-4	Salvage of Dead Wildlife
		W-5	Deployment of ACS Mobile Wildlife Stabilization Center

Through Shell’s OSRO memberships (ACS and MSRC) and contracted services with ARS and AES-RO, trained personnel from these organizations are available 24 hours per day, seven days per week to deploy and operate spill-response equipment. ACS mutual aid agreements and MSAs provide additional resources when needed. Access to resources to provide Tier III response and implement nearshore response tactics is provided within Appendices A, B, and G. Additional information on agreements that provide for access to MSAs, mutual aid agreements, or commercially available suppliers is also provided within these appendices. Required mobilization, transit, and deployment times for these resources depends on the spill event. Mobilization times for equipment that is not pre-staged are described in the Shell Tactics and ACS Tactics. The numbers and specific types of personnel required for response are also dependent upon incident-specific needs.

Nearshore and Shoreline Response Plan

Evaluations have been made of the likely spill trajectories that could result for a number of hypothetical spills from Shell's offshore operations. The oil spread and transport calculations suggest that shoreline exposures are unlikely and, if occurring, would not normally involve more than a few high priority protection sites at a time, and that even under infrequent, prolonged strong winds from the WNW and W, it would likely take several days for any oil to reach the mainland from the drill site located within the lease blocks. Using prevailing wind and sea conditions, including results from the BOEM's FEIS for Oil and Gas Lease Sale 193 and wind data collected by Shell during the years (1980, 1982, and 1983) of working in the Chukchi Sea, trajectory analyses suggest that it is highly unlikely that oil could impact the nearshore environment in less than six days. Even if oil did survive that long in the open ocean, there would be ample time to monitor its movement, prepare to intercept and recover it, and to position shoreline protection and cleanup crews at priority protection sites well before the oil may arrive.

Shell has developed a nearshore and shoreline response program that incorporates dedicated response equipment assets and trained personnel provided by ACS. The nearshore TF-6 contains a capacity of 18,636 bbl, three work boats, skimmers, mini-barges, and booms for nearshore recovery operations. In addition, work boats, and shoreline protection systems will be pre-staged in Wainwright for rapid deployment of resources to implement protection strategies and tactics. The response action time frame for pre-staged shoreline protection resources is estimated to be 12 hr, which includes mobilization (4 hr), transit (2 hr) and deployment (3 hr) times. Task forces have been established to handle free oil recovery operations, shoreline protection booming, and shoreline recovery and cleanup activities. Personnel from ACS, supplemented with backup response teams from the NSSRT, ACRT, and VRTs, can be mobilized on short notice to deal with oil in the unlikely event that it could threaten any of the nearshore and shoreline environments along the Chukchi Sea.

Tactics in the shallow coastal and nearshore environments of the Chukchi Sea are best carried out using relatively small response boats. Shell may direct ACS, ARS, or AES-RO to mobilize numerous small workboats and landing craft to support these operations providing for the transport of people and equipment to remote locations. These shallow-draft response boats are flexible platforms for conducting response activities in the changing conditions of the Chukchi Sea. The nearshore / shoreline response concept is to use smaller, more maneuverable vessels to conduct shoreline protection and cleanup operations, even in light concentrations of broken ice. The smaller vessels are better able to access pools of collected oil against an ice edge, move between ice cakes and floes, and respond more quickly to changing weather and ice conditions.

Once mobilized to the Chukchi nearshore, TF-6 provides a safe haven for personnel and vessels in the event of bad weather. TF-6 is capable of storing recovered oil and debris and serves as a mobile staging platform for nearshore and shoreline protection operations along the Chukchi Sea coast. The TF-6 platform, the equipment staged onshore, and supplemented with cascading resources from ACS, ARS, and AES-RO that includes equipment and responders provides a flexible yet rapid response capability should a spill occur in the Chukchi Sea.


Experience has shown that small response boats, working with shallow-draft mini-barges (249-bbl capacity) are ideal for easy maneuvering in thin ice and around ice cakes. Another advantage of the mini-barges is that on their return from lightering their contents at TF-6, they can be used as cargo platforms to carry equipment and supplies for the ongoing nearshore and shoreline operations.

Wildlife Response Plan

A Wildlife Response Plan (Appendix I) has been developed by Shell in order to provide for coordinated, immediate, and effective protection, rescue, and rehabilitation of (and minimization of risk of injury to) wildlife resources present in the Chukchi Sea region. The plan includes general planning considerations, response strategies, specific protocols, and key resources to guide oil spill response operations in providing protective measures for migratory birds (including waterfowl, seabirds, shorebirds, and raptors), marine mammals, and terrestrial mammals. Species lists for migratory birds, marine mammals, and terrestrial mammals provide population densities for species commonly found in the Chukchi Sea or at onshore locations. The plan incorporates standards established by ACS in the Technical Manual and the ARRT Unified Plan, Annex G – Wildlife Guidelines for Alaska. These plans serve as the foundation for Shell's Wildlife Response Plan.


The Wildlife Specialist in the Environmental Unit of the IMT is responsible for permitting and coordinating with state and federal agencies with jurisdictional authorities for approval and implementation of the Wildlife Response Plan. The Wildlife Specialist will be responsible for activation of the IBRRC and for mobilization of the ACS Mobile Stabilization Unit (ACS Tactic W-5) to Wainwright, where oiled waterfowl would be stabilized and prepared for transport to Anchorage for long-term care and rehabilitation utilizing contract resources as identified in ACS Tactic L-9.

Figure 2.7.7-1
Shoreline Containment and Protection

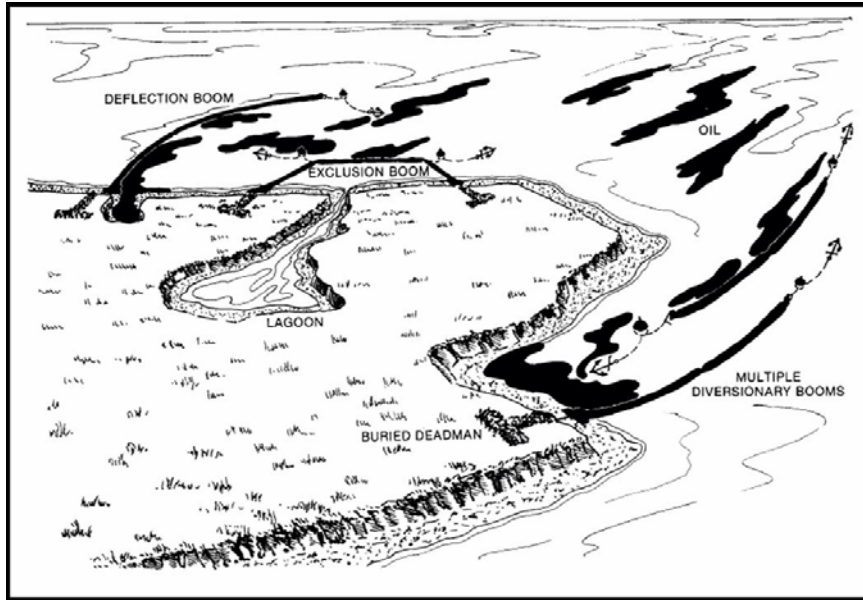


Concentration of oil at natural and/or man-made collection sites and diversion of oil away from priority protection sites.

Figure 2.7.7-2
Shoreline Containment and Recovery Operations

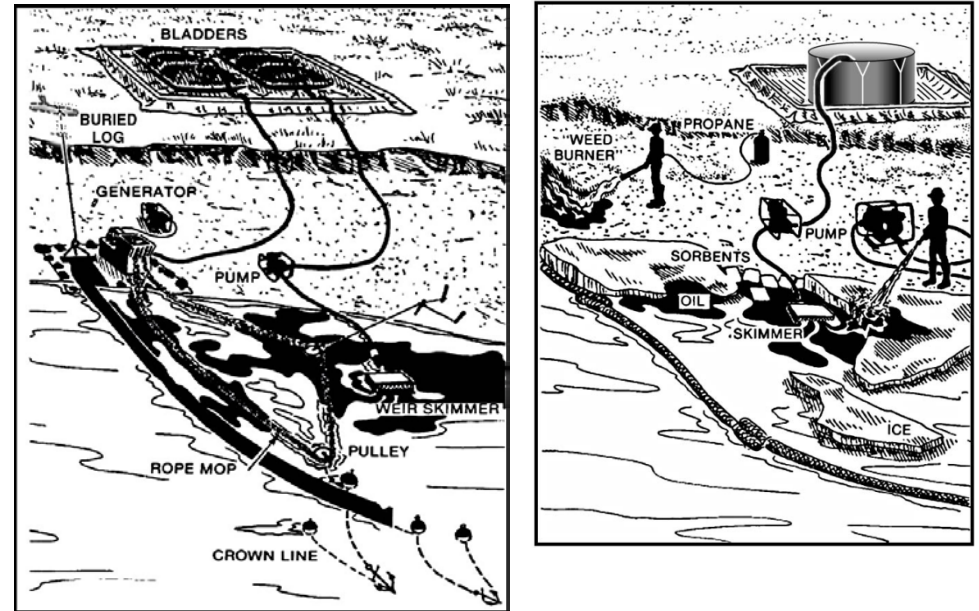


Deflection of oil toward shore for recovery with portable skimmers. Temporary storage of recovered oil in bladders or Fastanks, and burning of isolated pools of oil.

**Figure 2.7.7-3
Shoreline Cleanup and Backwater Protection**

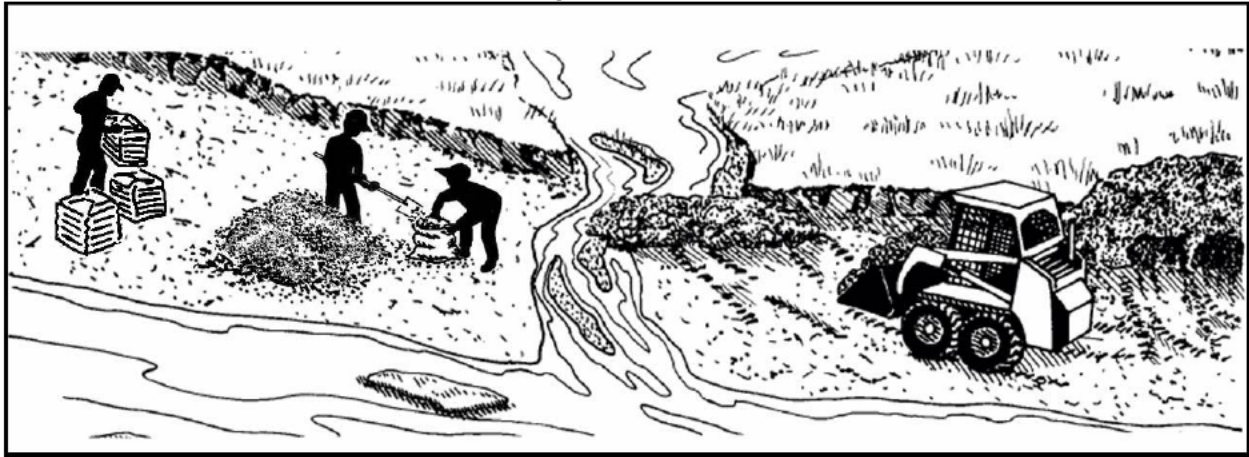


Physical removal of oil and oiled debris from beaches. Temporary blockage of marshes and other wetland areas.

**Figure 2.7.7-4
Nearshore Diversion and Recovery of Oil**

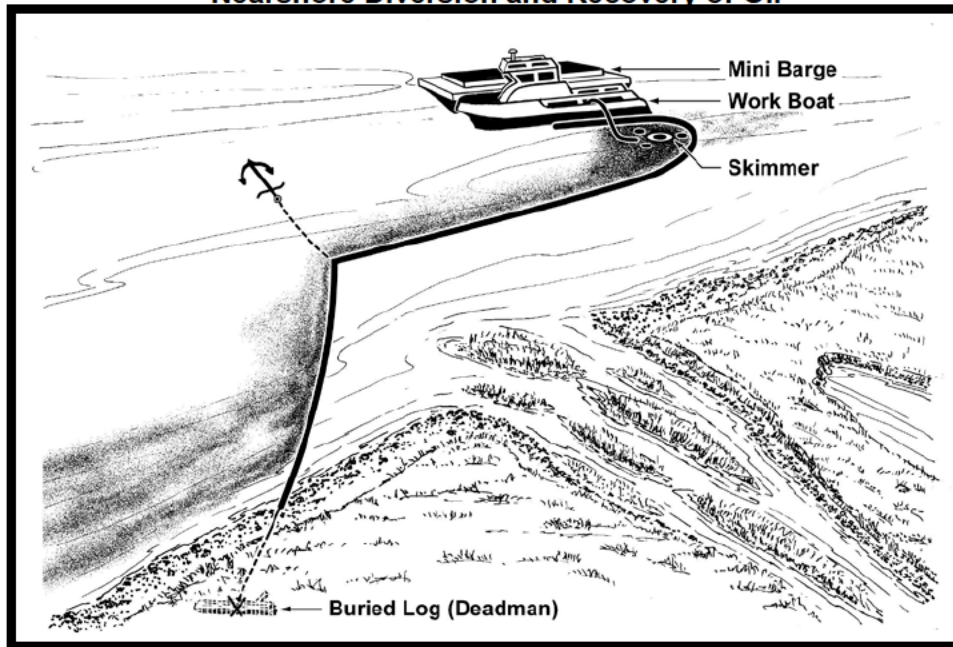


Protection of environmentally sensitive shoreline areas with recovery away from the shoreline.

Figure 2.7.7-5
Nearshore Recovery in Broken Ice

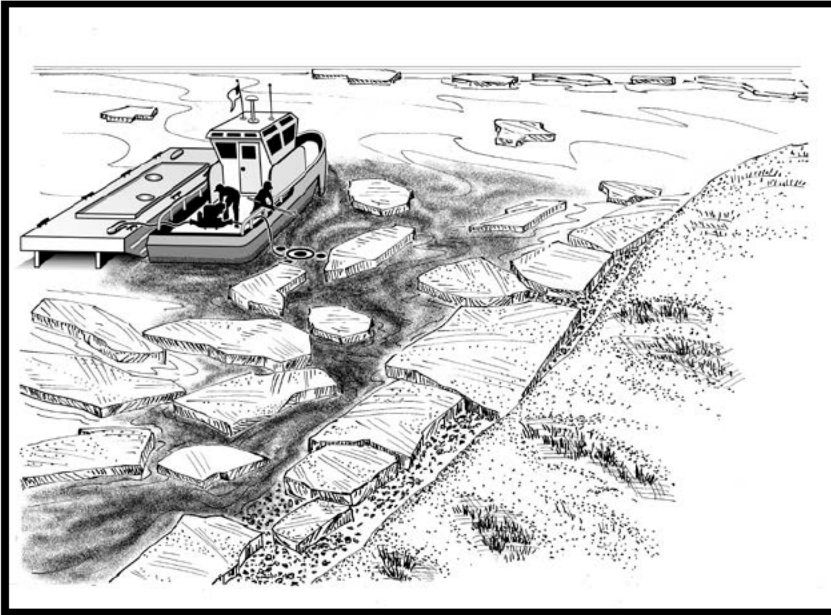

Recovery of oil that is wind-herded and trapped within ice cakes nearshore. Transfer of the recovered oil directly to a mini-barge.

Figure 2.7.7-6
Nearshore Ignition of Oil In Ice

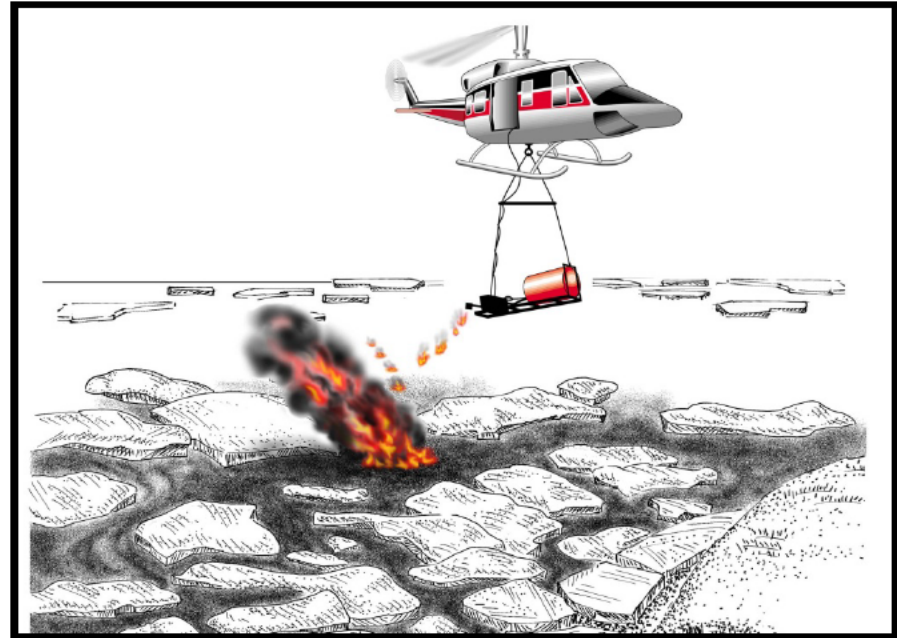

Heli-torch ignition of oil that is wind-herded and trapped within ice cakes. Burning with gelled fuel igniters released upstream and allowed to drift into the oil.

2.7.8 Procedures to Store, Transfer, and Dispose of Recovered Oil and Oil-Contaminated Materials [30 CFR 254.23(g)(8)]

Procedures for lightering, transfer, storage, and disposal of recovered oil and oil-contaminated materials of oil from tanks are discussed in the Shell Tactics Manual and ACS Technical Manual, and include, but are not limited to, methods described in Table 2.7.8-1. The Recovery and Storage section of the ACS Technical Manual provides additional information for storage and transfer procedures for the individual recovery tactics described within the section. Appendix G, and ACS Tactic L-10, contain additional information regarding logistical support and services suppliers for the handling and transport of waste streams.

**Table 2.7.8-1
 Storage, Transfer, and Disposal Tactics References**

MATERIAL HANDLING CATEGORY	MANUAL	TACTIC ID	TACTIC
Storage and Transfer	ACS	R-22	Temporary Storage Options
		R-28	Lightering/Offloading
	Shell	OR-3A	OSR Vessel / OSR Barge Offloading to Tanker
		OR-6	Offloading Intermediate Storage Devices
		SR-9	Recovered Fluid Transfer
Disposal	ACS	D-1	Processing Recovered Liquids
		D-2	Storage and Disposal of Non-Liquid Oily Wastes
		D-3	Disposal of Non-Oily Wastes
		D-4	Stockpiling Oiled Gravel
		D-5	Processing Contaminated Snow / Ice
	Shell	DP-1	Waste Management and Disposal

Storage and Transfer

Liquids from the nearshore skimmer vessels are stored in mini-barges. Liquids and oily waste and debris recovered by the shoreline recovery task forces are stored in Fastanks or bladder tanks. Decanting follows UC plan approval. Stored liquids on mini-barges are offloaded to TF-6 for transfer to TF-3.

Heavy oil transfer pumps will be used to pump product from the mini-barges to TF-6. These pumps are modified, positive displacement pumps that are hydraulically driven and have been specially developed for pumping extremely viscous product. The mini-barges are fitted with two suction lines (one each per tank) or the pumps can be submerged in the product via hold access hatches.

As the OSR vessels near their capacities, the recovered oily liquids are transferred to OST. Stored liquids are gauged and manifested. (Recovered liquids received by the TF-1, TF-2, TF-4, TF-5, and TF-6 will be retained on board until transferred to TF-3.) Oil transfer from the OSR vessels will be via installed cargo system or hydraulically driven GT-A heavy oil transfer pumps. Each of the tanks on the TF-1 is fitted with a discharge pump capable of a throughput rate of approximately 723 bbl/hr (115 cu m/hr). The combined pumping capacity of the 8 pumps in each of the tanks on board the OSR vessel is approximately 5,784 bbl/hr (920 cu m/hr). Temporary storage of oil, oily waste, and debris recovered during a spill cleanup may be provided by tanks located on the OSR vessels. The spill location or other logistical concerns

may also require storage of oil, oily waste, and debris in smaller, more portable containers that can be brought to the scene via helicopter, or small boats and mini-barges.

Disposal

Temporary storage for non-liquid oily wastes consistent with ACS Tactic D-2 and D-3 may be established at Wainwright, Barrow, or other UC-approved location. Shell may utilize pre-identified waste-handling facilities as outlined in the EP. Non-liquid oily wastes are classified and disposed of according to classification. Non-oily wastes are classified and disposed of accordingly.

At the time of the spill, the Operations Section Chief and EU Leader will jointly determine the reuse, recycling, or disposal method best suited to the state of the oil, the degree of contamination, and the logistics involved in these operations. Application for agency approvals are completed before the determined method of disposal is implemented. Recovered fluids stored on board TF-3 may be disposed of either at Shell Group refineries or other third-party processors, in accordance with Shell environmental policy, and relevant local laws and regulations. In the event disposal and processing of any spill fluids are managed through Prudhoe Bay, this will be in accordance with ACS Technical Manual disposal tactics D1 through D5. In the event they are taken to Prudhoe Bay, recovered fluids would be handled in accordance with Ballot Agreements. A detailed description of Shell’s waste management procedures as applicable to a spill response scenario are further described in Appendix K, Oil and Debris Disposal Procedures (see Table 2.7.8-2 below for onshore waste disposal facilities and associated methods).

**Table 2.7.8-2
 Onshore Waste Disposal Facilities and Disposal Methods**

Name/Location of Disposal Facilities	Disposal Method
Waste Management Inc. Columbia Ridge Recycling & Landfill, Arlington, OR – or –	Land-farmed and/or incinerated
Dutch Harbor Municipal Landfill Dutch Harbor, AK	
Waste Management Inc. Columbia Ridge Recycling & Landfill, Arlington, OR – or –	Hazardous waste disposal in Class 1 injection well or approved treatment/ disposal site
Emerald Alaska, Anchorage - to Emerald Services, Seattle, WA – or –	
Clean Harbor Environmental Services Aragonite, UT	
Waste Management Inc. Columbia Ridge Recycling & Landfill, Arlington, OR – or –	Land-farmed and/or incinerated
Emerald Alaska, Anchorage - to Emerald Services, Seattle, WA – or –	
Clean Harbor Environmental Services Aragonite, UT	

2.7.9 Methods to Implement Dispersant Use and *In Situ* Burn Plans [30 CFR 254.23(g)(9)]

2.7.9.1 Dispersants

Procedures and methods for implementation of dispersant use plans are described in detail within the Shell Tactics Manual and ACS Technical Manual and include, but are not limited to, methods described in Table 2.7.9-1 below.

**Table 2.7.9-1
 Dispersant Tactics References**

NON-MECHANICAL RESPONSE CATEGORY	MANUAL	TACTIC ID	TACTIC
Dispersant Use	ACS	DT-1	Dispersant Application Via Vessel
		DT-2	Dispersant Application Via Aircraft
		DT-3	Dispersant Application Via Helicopter
	Shell	OR-8	Dispersant Spray from OSR Vessel Outriggers
		OR-9A	Aerial Dispersant Application (HERC with ADDS-Pack)
		OR-9B	Aerial Dispersant Application (Helicopter Spray Bucket)

Access to resources to implement non-mechanical response tactics identified are provided within Appendices A, B, and G. Additional information on agreements that provide for access to MSAs, mutual aid agreements, or commercially available suppliers is also provided within these appendices. Through Shell's membership in ACS and MSRC and contracted services with ARS and AES-RO, trained personnel from these organizations are available 24 hours per day, seven days per week to deploy and operate spill-response equipment. Required mobilization times for these resources would depend on the spill event. Mobilization times, for equipment that is not pre-staged, are described in the Shell Tactics and ACS Tactics. The numbers and specific types of personnel required for response are also dependent upon incident-specific needs.

Additional information regarding methods to implement the dispersant use plan is located in Appendix D.

Shell's Dispersant Plan is consistent with the provisions of Annex F of the Unified Plan. As the situation warrants, Shell may utilize the following references and job aids to implement the Dispersant Use Plan:

- The Alaska Federal / State Preparedness Plan for Response to Oil and Hazardous Substance Discharges/Releases - Unified Plan, Change 3, available at: <http://dec.alaska.gov/spar/perp/plan.htm> or <http://alaskarrt.org/>
- NOAA's Office of Response and Restoration Dispersant Application Observer Job Aid, available at: http://response.restoration.noaa.gov/dispersants_jobaid
- NOAA's Office of Response and Restoration SMART Program, available at: <http://response.restoration.noaa.gov/smart>

2.7.9.2 *In Situ* Burning

Procedures and methods for implementation of *in situ* burn plans are described in detail within the Shell Tactics Manual and ACS Technical Manual and include, but are not limited to, methods described in Table 2.7.9-2 below.

**Table 2.7.9-2
In Situ Burning Tactics References**

NON-MECHANICAL RESPONSE CATEGORY	MANUAL	TACTIC ID	TACTIC
<i>In Situ</i> Burning	ACS	B-1	In-Situ Burning Plan
		B-1A	In-Situ Burn Plan and Application Form
		B-2	Burning Oily Vegetation
		B-3	In-Situ Burning with Heli-Torch and Other Igniters
		B-4	Deployment and Use of Fire Containment Boom
		B-5	Burning Oil Pools on Any Solid Surface
		B-6	Burn Residue Recovery
	B-7	Burn Extinguishment on Water	
Shell	OR-7	Fire Boom / Heli-Torch	

Access to resources to implement non-mechanical response tactics identified are provided within Appendices A, B, and G. Additional information on agreements that provide for access to MSAs, mutual aid agreements or commercially available suppliers is also provided within these appendices. Through Shell’s membership in ACS and MSRC and contracted services with ARS and AES-RO, trained personnel from these organizations are available 24 hours per day, seven days per week to deploy and operate spill-response equipment. Required mobilization times for these resources would depend on the spill event. Mobilization times, for equipment that is not pre-staged, are described in the Shell Tactics and ACS Tactics. The numbers and specific types of personnel required for response are also dependent upon incident-specific needs.

Additional information regarding methods to implement the *in situ* burning plan, is located in Appendix E.

Shell’s *In Situ* Burning Plan is consistent with the provisions of Annex F of the Unified Plan. As the situation warrants, Shell may utilize the following references and job aids to implement the *In Situ* Burning Plan:

- The Alaska Federal / State Preparedness Plan for Response to Oil and Hazardous Substance Discharges/Releases - Unified Plan, Change 3, available at: <http://dec.alaska.gov/spar/perp/plan.htm> or <http://alaskarrt.org/>
- NOAA’s Office of Response and Restoration SMART Program, available at: <http://response.restoration.noaa.gov/oil-and-chemical-spills/oil-spills/resources/in-situ-burning.html>

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

TABLE OF CONTENTS

APPENDIX A	RESPONSE EQUIPMENT [30 CFR 254.24]	A-1
A.1	EQUIPMENT INVENTORY [30 CFR 254.24(a)]	A-1
A.2	MARINE VESSELS IN SUPPORT OF CHUKCHI SEA EXPLORATION DRILLING PROGRAM	A-5
A.3	AERIAL SUPPORT OF CHUKCHI SEA EXPLORATION DRILLING PROGRAM	A-18
A.4	DISCUSSION OF SHELL TECHNOLOGIES AND SYSTEMS	A-22
A.5	MANPOWER SOURCES AND AVAILABILITY	A-25
A.6	INSPECTION AND MAINTENANCE PROGRAMS [30 CFR 254.24(b)]	A-28

FIGURES

Figure A-1	Capping Stack	A-24
------------	---------------	------

TABLES

Table A-1	OSRO Contacts and Equipment	A-1
Table A-2	Shell-Chartered Offshore Equipment Information	A-2
Table A-3	Personnel Resources for Worst Case Discharge	A-4
Table A-4	List of Marine Vessels in Support of Chukchi Sea Exploration Drilling Program	A-5
Table A-5	List of Aircraft in Support of Chukchi Sea Exploration Drilling Program	A-18
Table A-6	Response Assets Available to Deploy	A-22
Table A-7	Capping Stack Overview	A-24

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

APPENDIX A RESPONSE EQUIPMENT [30 CFR 254.24]

A.1 EQUIPMENT INVENTORY [30 CFR 254.24(a)]

Spill response equipment is available through Shell for offshore and nearshore operations, and through Shell leased equipment and OSROs for onshore operations. Table A-1 lists OSRO and response contractors contact information, applicable tactics, and references to equipment inventory lists, as applicable.

For Tier I, II, and III spill responses, in-region (North Slope) resources would be made available as needed. These assets include:

- Shell-chartered personnel, equipment, and vessels; and
- Personnel, equipment, and vessels from OSROs and response contractors (ACS, ARS, and AES).

ACS is one of the equipment providers for Shell in the Chukchi Sea. As provided for in 30 CFR 254.4, Shell’s OSRO equipment list, mutual aid and master service agreements are referenced within this OSRP to demonstrate additional response capability beyond that identified to meet the WCD (Appendix C). On a global scale, Shell is a contractual member of other OSROs, such as OSRL, through which additional Tier III assets may be accessed. Specific equipment available to support shoreline protection and recovery activities described in the WCD are listed in ACS Tactic L-6. Shell response assets available on the OSR vessels staged in the Chukchi Sea are presented in Shell Tactic LE-3. The response equipment operating limitations are provided in ACS Tactic L-6 and L-7 and further discussed in Appendix H within context of the potential environmental conditions that may be encountered in the Chukchi Sea. Description of response equipment is provided by reference to Tactics and associated OSR inventories through website links and/or contact information per provisions of 30 CFR 254.4.

**Table A-1
OSR Contacts and Equipment**

OSRO / CONTRACTOR	TELEPHONE	TACTIC	EQUIPMENT INVENTORY
ACS – OSRO, Personnel and Equipment Address: Pouch 340022 Prudhoe Bay, Alaska 99734 Main Number Prudhoe Bay ACS Operations Manager North Slope Mutual Aid (if applicable) managed through ACS	907-659-2405 907-659-3202 907-659-2405	ACS Tactics: L-3 L-5 L-6, L-6A L-7 L-10 L-11	Available from ACS Technical Manual, online at: http://www.alaskacleanseas.org/tech-manual/
MSRC – Tier III Address: 220 Spring Street, Suite 500, Herndon, VA 20179 Main Number Activation Number	800-259-6772 800-645-7745	N/A	Available from MSRC with member login, and online at: http://www.msrc.org/services/oil-spill-response/equipment/MSRC_Major_Equipment_List.pdf
AES-RO – Equipment and Tactics Address: 3900 C Street, Anchorage, Alaska 99503 Main Number Anchorage AES-RO Operations Manager	907-339-6200 907-339-6200	Shell Tactic: LE-3	Staged on vessels within the Chukchi Sea or at Wainwright.
ARS – Personnel and Equipment Address: 7260 Homer Drive Anchorage AK 99518 Activation and Main Number Wainwright-based Response Supervisors	907-865-4900 907-223-2542 907-231-3451	N/A	Support Operations in Anchorage Pre-staged equipment in Wainwright.

Shell offshore response equipment for the Chukchi Sea is staged on each TF to provide operational flexibility in the event of a spill. Activation of Shell response equipment would be scaled as dictated by incident-specific response needs and environmental conditions. Not all equipment is deployed at once. For example, the WCD scenario illustrates the use of discrete recovery assets from each TF, which are activated to meet specific response objectives by Shell’s IC or QI.

Major Shell-chartered and contracted equipment on each Shell TF is presented in Table A-2. Table A-3 lists personnel resources for a WCD.

Table A-2
Shell-Chartered Offshore Equipment Information

TASK FORCE	EQUIPMENT DESCRIPTION	QUANTITY	OWNER	DISTANCE TO SITE
TF-1	OSR Vessel (300-ft)	1	Shell Charter	On site
	34-ft Work Boat (Shared with TF-2, 4, & 5)	3		
	Lamor LSC-5 Brush Skimmer	2		
	Ocean Boom	2,600 ft		
	Vertical Rope Mop Portable Skimmer	1		
	Duplex Mini-Brush/Disc Portable Skimmer	1		
	Storage Bladder (100 bbl)	1		
	Fire Boom System (<i>In Situ</i> Burning Containment)	500 ft		
	Dispersant Application Systems (Spray Arms)	2		
TF-2	OSR Barge	1	Shell Charter	< 25 n mi
	Transrec 150 Umbilical Weir Skimmer	2		
TF-3	OST (513,000 bbl minimum storage capacity)	1	Shell Charter	< 240 n mi
TF-4	VOSS	1	Shell Charter	< 420 n mi
	Transrec 150 Umbilical Weir Skimmer	1		
TF-5	VOSS	1	Shell Charter	< 420 n mi
	Transrec 150 Umbilical Weir Skimmer	1		
TF-6	OSR Barge	1	Shell Charter	< 480 n mi
	Support Tug for OSR Barge	1		
	Lamor LSC-5 Brush Skimming Package	2		
	34-ft Workboats (Boom Deployment / Towing)	3		
	Lamor LORS-2C Brush Skimming Package	2		
	47-ft Response Vessel (Transport / Boom Deployment)	1		
	Coastal Boom (Shared with TF-7 & 8)	6,000 ft		
	Duplex Mini-Brush/Disc Portable Skimmer	1		
	Vertical Rope Mop	1		
	100-bbl Flexible Containment System	1		
	249-bbl Interim Storage Mini-barge	4		
	Ocean Boom	2,600 ft		
Fire Boom Systems (<i>In Situ</i> Burning Containment)	500 ft			

**Table A-2
Shell-Chartered Offshore Equipment Information (Continued)**

TASK FORCE	EQUIPMENT DESCRIPTION	QUANTITY	OWNER	DISTANCE TO SITE
TF-7	Conventional Boom (Shared with TF-8)	10,000 ft	Shell Charter	Staged in Wainwright Incident Specific
	Coastal Boom (Shared with TF-8)	4,000 ft		
	Shoreline Guardian Boom	4,000 ft		
	26 to 32-ft Landing Craft	4		
	Workboats	6	ACS ³	Staged in Deadhorse
TF-8	Oleophilic Skimmers ²	20	ACS ³	Staged in Deadhorse Incident Specific
	Bladders (500 to 2,640 gal) ²	36		
	Portable Folding Tank (2,500 gal) ²	29		
	Portable Folding Tank (2,500 gal) ²	21	ARS	Staged in Wainwright - Incident Specific
	IMO Tanks (6,000 gal) ²	1		

¹See Table A-6 and vessel specifications for additional information on available offshore assets

² Equipment is identified for nearshore and shoreline response efforts. All equipment is available through Shell, Shell OSROs, or Shell response contractors and may be activated by the IC or QI. On-site equipment and supplies may be contained in heated storage units to ensure their operability during cold temperatures, as necessary. There are a number of conexes included in the vessel fleet which include a supply of contingency materials, tools, PPE, and spare parts.

³ACS activation number is (907) 659-2405.

⁴Relief Tank Vessel with minimum 250,000 bbl storage capacity arrives on site Day 20.

**Table A-3
Personnel Resources for Worst Case Discharge**

TASK FORCE	UNIT DESCRIPTION	RESPONDER POSITIONS PER SHIFT	SHIFTS PER DAY	TOTAL PERSONNEL	TASK FORCE SIZE
TF-1	OSR Response Supervisor	1	2	2	36
	OSR Vessel Deck Crew	3	2	6	
	34-ft Work Boat Operator (Shared with TF-2, 4 & 5) x 3 boats	6	2	12	
	Lamor Skimmer Operators	2	2	4	
	OSR Vessel Operating Crew (<i>Nanuq</i> or similar)	12	N/A	12	
TF-2	OSR Response Supervisor	1	2	2	23
	OSR Barge Deck Crew	3	2	6	
	TransRec Operators	4	2	8	
	OSRB (Tug) Operating Crew (<i>Klamath</i> or similar)	7	N/A	7	
TF-3	Tanker Deck PIC	1	1	2	20
	Tanker Deck Crew	3	2	6	
	Tanker Operating Crew (<i>Affinity</i> or similar)	12	N/A	12	
TF-4	VOSS Supervisor	1	2	2	38
	VOSS Deck Crew	3	2	6	
	Trans Rec Skimmer Operators	2	2	4	
	VOSS Operating Crew (<i>Aiviq</i> or similar)	26	N/A	26	
TF-5	VOSS Supervisor	1	2	2	28
	VOSS Deck Crew	2	2	4	
	Trans Rec Skimmer Operators	2	2	4	
	VOSS Operating Crew (<i>Harvey Spirit</i> or similar)	18	N/A	18	
TF-6	Nearshore Recovery Supervisor	1	1	1	19
	OSR Barge Deck Crew (<i>Endeavor</i> or similar)	3	1	3	
	47-ft Skimmer Boat Operators	3	1	3	
	34-ft Work Boat Operator x 3 boats	6	1	6	
	Nearshore Barge Operating Crew (tug)	6	N/A	6	
TF-7	Shoreline Protection Supervisor	1	1	1	37
	Shoreline Protection Labor	4	1	4	
	29-ft Work Boat (ACS Type C) Operators	4	1	4	
	18 to 26-ft Work Boat (ACS Type A & B) Operator	8	1	8	
	24-ft Work Boat Operators	4	1	4	
	26 to 32-ft Landing Craft Crew x 4 boats	8	1	16	
TF-8	Shoreline Recovery Supervisor (Supported by TF-7)	1	1	1	11
	Shoreline Recovery Labor (Supported by TF-7)	10	1	10	
Ice Management	Ice Management Vessel (<i>Fennica</i> or Similar)	30	N/A	30	30
Subsea Containment	Subsea Containment and Processing Unit	67*	N/A	67	67
TOTAL PERSONNEL				309	309

For ACS or ARS personnel, the Total is the sum of vessel operators, technicians, and general laborers. For ACS or ARS personnel, the Team Leader is a separate person.

* Staffed during incident

Shift = 12hrs TF-6, TF-7 and TF-8 operate one 12-hr shift per day.

All TF-3 tasks, including PIC, will be performed by the tanker crew with no additional response staff from Shell or ACS.

Additional support personnel availability is described in Appendix A, ACS Tactics L-8, L-9 and L-10.

A.2 MARINE VESSELS IN SUPPORT OF CHUKCHI SEA EXPLORATION DRILLING PROGRAM

Table A-4
List of Marine Vessels in Support of
Chukchi Sea Exploration Drilling Program

VESSEL	DESCRIPTION
OSR Vessel	<i>MV Nanuq</i> or similar
OSR Barge (Offshore)	<i>MV Klamath</i> or similar
OSR Barge Tug (Offshore)	Sea Robin Class Tug or similar
OST	<i>Affinity</i> or <i>Perserverence</i> or similar
VOSS (Anchor Handling Icebreaker)	<i>MV Aiviq</i> or similar
VOSS	<i>MV Harvey Spirit</i> or similar
OSR Barge (Nearshore)	<i>Arctic Endeavor</i> or similar
OSR Barge Tug (Nearshore)	<i>Point Oliktok</i> or similar
OSR Barge Carried Support Vessels:	Including:
47-ft Skimmer Boat	<i>Kvichak</i> or similar
34-ft Work Boat	<i>Kvichak</i> or similar
249-bbl Mini-Barge	46-ft or similar
Anchor Handling / Ice Management Vessel	<i>MV Tor Viking</i> or similar
Multi-Purpose Icebreaker	<i>MV Fennica</i> or similar
Subsea Containment and Processing System	<i>Arctic Challenger</i> or similar

MSV TOR VIKING MULTI-PURPOSE ANCHOR HANDLER/ICEBREAKER OR SIMILAR



The MSV *Tor Viking* is a multifunctional, diesel-powered vessel, providing ice management capabilities, towing, and supply services. The ship is equipped with double hulls between all tanks that contain oil.


DNV ID:	21779	IMO No:	9199622
Operational Status:	In Operation	Class Relation:	In DNV Class

Speed: 16 knots – Abt. 42.7 MT
Engine Output: 13,440 kW
Dimensions:

Loa:	83.7 m	Gross Tonnage (ITC 69):	3,382
Lbp:	75.2 m	Net Tonnage (ITC 69):	1,145
Breadth Moulded:	18 m	Deadweight Tonnage:	2,528
Depth Moulded:	8.5 m	Bollard Pull Forward	200 T
Draught:	7.2 m	Bollard Pull Astern	120 T

Flag:	Sweden	Signal Letters:	SLJT
Port:	SKÄRHAMN		
Owner:	Trans Viking Icebreaking & Offshore AS		
Manager:	Viking Supply Ships AS Kristiansand, Norway		
Yard:	Havyard Leirvik A.S. (108910)	Year of Build:	2000
Type:	630 – Supply Vessel/Tug		
<u>Class Notation:</u>	✠1A1 ICE-05 Icebreaker (for max draught 6.70m) Tug Supply Vessel SF HELDK-SH E0 DYNPOS-AUTR NAUT-OC DK(+) HL(2.8)		

M/V A/VIQ MULTIPURPOSE ANCHOR HANDLER OR SIMILAR

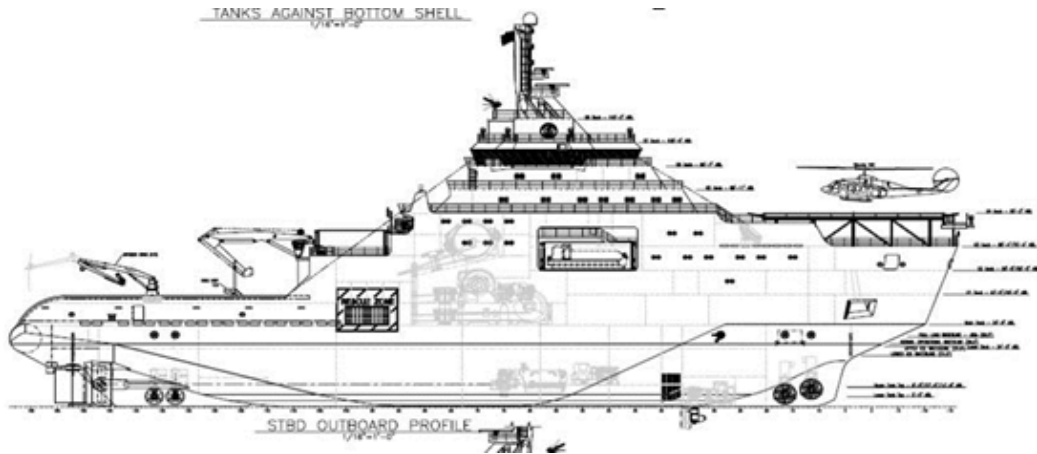

GENERAL SPECIFICATIONS

Length	360 ft
Width	80 ft
Draft	24 ft
Accommodations	64 berths
Maximum Speed	15 knots
Fuel Storage	12,575 bbl

THE M/V *FENNICA* MULTIPURPOSE ICEBREAKER OR SIMILAR

The *Fennica* was specifically designed as a multifunctional icebreaker for operations in the northern seas for anchor handling, towing and ice management. The *Fennica* is equipped with a heli-deck and life saving watercraft.



GENERAL SPECIFICATIONS

Deadweight Capacity	4,500 TONS
Power	21,000 KW
Length	116 M
Width	26 M
Draft	8.4 M
Cruising Speed	16 KNOTS
Berthing	82
Class	1A1-EOEO ICEBREAKER POLAR-10 TUG SUPPLY VESSEL SFSF OR HELDK EPR EO DYNPOS -AUTR

OSR VESSEL – NANUQ OR SIMILAR



GENERAL SPECIFICATIONS

Vessel Name	<i>Nanuq</i> (Hull 235)
Principal Dimensions	301 ft 6 inches x 60 ft x 24 ft
Horsepower	7,268 BHP
Deck Space	169 ft x 50.5 ft
Main Engines	(2) 3608 Caterpillar
Bow Thruster	2 x 1,700 HP/CP Tunnel
Stern Thruster	1,700 HP/CP Tunnel
Electronics	As per GMDSS requirements
Fuel Oil Capacity	6,867 bbl
Liquid Storage	12,690 bbl
Certification	USCG Subchapter L (OSV) and I (cargo); ABS=✠A1 (Hull); ABS=✠AMS (Machinery); ABS Load Line; ABS DP-2; Ice Class A1, SOLAS 2000; MARPOL 99

KVICHAK 34-FT OIL SPILL RESPONSE WORK BOAT OR SIMILAR



Vessel use:

- Operates in open ocean and shallow water with adequate protection to propellers and rudders.
- Capable of operating in up to 6-ft seas depending upon wave characteristics.
- Has an approximate 7,000 lbs of bollard pull.
- Vessel strengthened with ice belting around waterline for incidental ice contact.

GENERAL SPECIFICATIONS

Overall Length	34 ft 6 inches
Overall Beam	12 ft
Deck Length	34 ft
Draft, Light Load	32 inches
Draft, Full Load	38 inches
Engine, Twin Marine Diesels	305 hp, each
Approx. Top Speed	20 knots
Approx. Bollard Pull	7,000 lbs
Fuel Oil	300 gal


THE M/V *HARVEY SPIRIT* OFFSHORE SUPPLY VESSEL OR SIMILAR



GENERAL SPECIFICATIONS

Length	280 ft
Width	60 ft
Draft	15.9 ft
Accommodations	37 berths
Maximum Speed	13 knots
Fuel Storage	6,233 bbl


OFFSHORE OSR BARGE *KLAMATH* OR SIMILAR

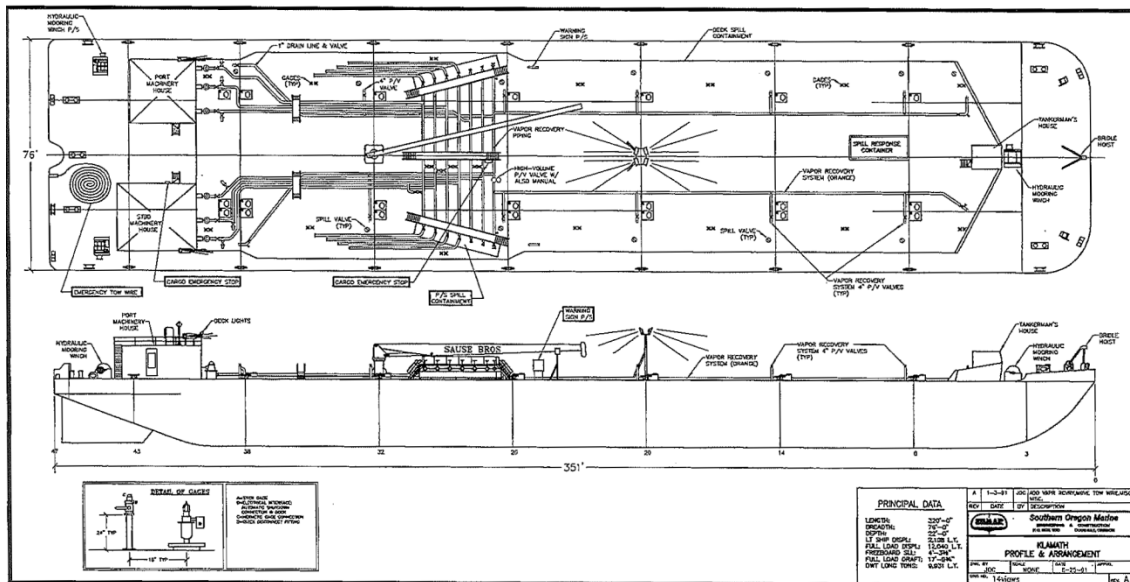

GENERAL SPECIFICATIONS

Length	351 ft
Width	76 ft
Depth	22 ft
Liquid Cargo Storage (95%)	76,900 bbl
Classification	ABS - +A1, Grade B Oil Tank Barge

OFFSHORE SEA ROBIN CLASS TUG OR SIMILAR

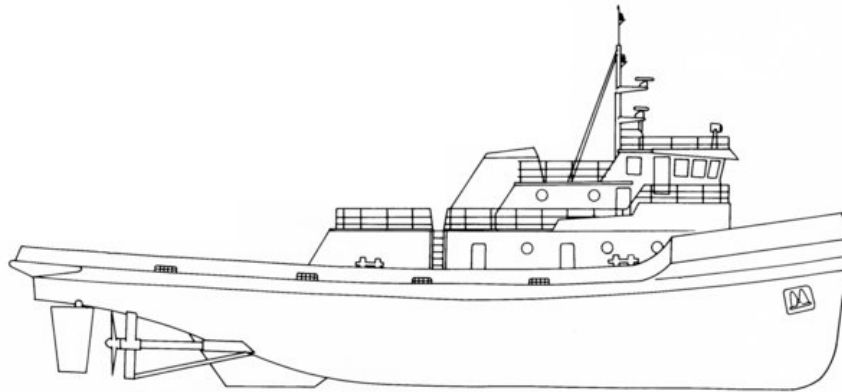

GENERAL SPECIFICATIONS

Length	126 ft
Width	34 ft
Draft	16.5 ft
Main Engines	(2) 3606 Caterpillar
Horsepower	5,000 BHP
Fuel Storage	1,786 bbl

ARCTIC TANKER: AFFINITY OR PERSEVERANCE OR SIMILAR




Shell has chartered for the purposes of mass oil storage an arctic tanker with ST Shipping and Transport Pte Ltd for the provision of the *Affinity* or its identical sister ship, the *Perseverance*. A tanker with similar functional specifications would be engaged if the *Affinity* and the *Perseverance* are unavailable when operations begin.

A summary of its principal dimensions and capabilities follows:

Name:	<i>Affinity</i>	<i>Perseverance</i>
IMO Number:	9289776	9289752
Where Built:	ST Shipbuilding Co. Ltd, Korea	
Date Delivered:	05 Jul 2005	08 Jun 2005
Type of Vessel:	Oil Tanker	
Type of Hull:	Double Hull	
Port of Registry:	Singapore	
Flag:	Singapore	
Classification:	Det Norske Veritas	
Class Notation:	+1A1 Tanker for Oil ESP, ICE-1A, E0, VCS-2, T-MON	
Dimensions (meters):		
Length:	228	
Breadth:	32.292	
Draft (summer):	14.3	
Tonnages (metric):		
Gross Tonnage :	42,661	
Deadweight (tonnes):	73,741	73,789
Crude Capacity (bbl):	553,494	
Performance:		
Engine Output (kW):	13,736	
Engine Type/Builder:	Marine Diesel/STX	
Engine Designation:	6S60 MC-C	7S60 MC-C
Speed (knots):	16	

OSR BARGE AND ICE CLASS TUG OR SIMILAR

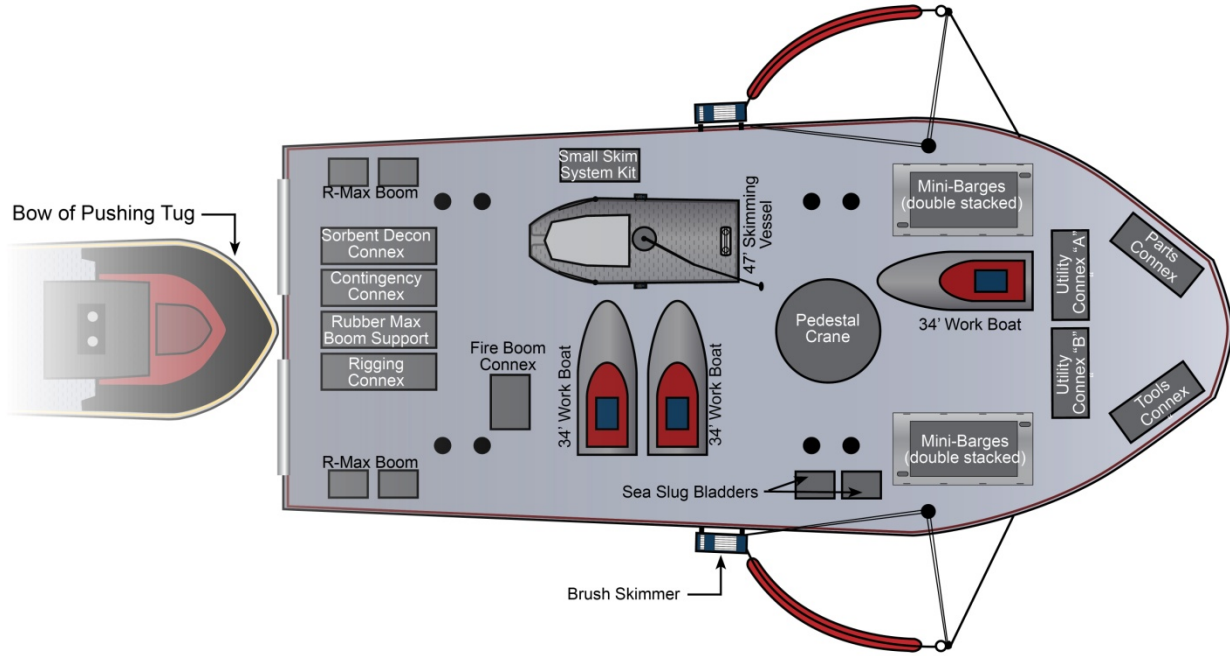

GENERAL SPECIFICATIONS

Vessel Name	<i>Point Oliktok</i>	Vessel Name	<i>Arctic Endeavor</i>
Principal Dimensions	90 ft x 32 ft x 11.5 ft	Principal Dimensions	205 ft x 90 ft x 15 ft
Horsepower	2110	Horsepower	Non-powered
Deck Space	30 ft x 30 ft	Deck Space	Approx. 200 ft x 80 ft
Main Engines	(2) Caterpillar 3512	Liquid Storage	18,636 bbl
Certification	USCG - Uninspected Towing Vessel ABS - A1, Towing Service, AMS	Certification	USCG - Freight Barge ABS - +A1, Oil Tank Barge, Ice Class C

**KVICHAK 47-FT OIL SPILL RESPONSE WORK BOAT
 (WITH LAMOR HK2 BRUSH SKIMMERS)**



Vessel use:

- Rapid response to the spill site.
- Oil recovery via LAMOR brush skimmer system.
- Operates in shallow water with adequate protection to propellers and rudders.
- Capable of operating in 6- to 8-ft seas.
- Has an approximate 22,000 lbs of bollard pull.
- Able to tow vessels and barges with a maximum weight of 75 gross tons alongside, astern, and pushing ahead.
- Capable of slow speed operation for skimming oil via the engine’s MGX transmissions.
- Vessel strengthened around waterline for incidental ice contact.

GENERAL SPECIFICATIONS

Length Overall	51 ft x 16 ft 8 inches x 54 inches
Deck Length	47 ft
Deck Width	16 ft
Fuel Tank	800 gal
Engine, Twin Marine Diesel	600 hp, each
Molded Dimensions	47 ft x 16 ft
Approx. Top Speed	22 knots
Approx. Bollard Pull	22,000 lbs
Approx. Draft	60 inches light

249-BARREL MINI-BARGES



GENERAL SPECIFICATIONS

Overall Length	46 ft
Overall Beam	12 ft
Overall Depth	5 ft 5 inches
Maximum Storage Capacity	249 bbl in two tanks

A.3 AERIAL SUPPORT OF CHUKCHI SEA EXPLORATION DRILLING PROGRAM

Shell has chartered rotary-wing and fixed-wing aircraft for the support of the Chukchi Sea exploration drilling program. Rotary-wing aerial support assets include Sikorsky S-92 (or similar) helicopters and an Agusta Westland AW139 helicopter (or similar) for multi-purpose duties that may include personnel transport, freight transport, and search and rescue. Fixed-wing aerial support assets include a Lockheed C-130A Hercules (or similar) for personnel and/or freight transport. Refer to Table G-2 (page G-6) for further information on aircraft staging locations.

**Table A-5
List of Aircraft in Support of
Chukchi Sea Exploration Drilling Program**

Aircraft	Description
Rotary-wing multi-purpose support	Sikorsky S-92 Helicopter or Similar
Rotary-wing multi-purpose support	Agusta Westland AW139 (IFR) Twin Turbine Helicopter or similar
Fixed-wing multi-purpose support	Lockheed C-130A Hercules or similar

***GENERAL SPECIFICATIONS
 SIKORSKY S-92 HELICOPTER**

**specifications may vary between operators' configurations*



<p>DIMENSIONS</p> <p>Length 60 ft 7 inches Width 12 feet 9 inches Height 15 feet 5 inches Main rotor diameter 56 ft 4 inches</p> <p>CARGO/BAGGAGE</p> <p>Passenger Cabin Volume: 700 cu ft (19.82 cu m) Baggage compartment volume: 140 cu ft (3.96 cu m) Sliding doors (SAR config.)</p> <p>SPECIFICATIONS</p> <p>Maximum gross weight: 26,500 lbs Empty weight (standard SAR config.): 16,831 lbs Useful load: 9,669 lbs Fuel capacity: 760 gal/2,877 liters (210 gal [two aux tanks]) Average cruise speed: 138 kts/280 kph Maximum range: 467 n mi/865 km (30-minute fuel reserve) Passenger seats 10-19 passengers, depending upon configuration Crew 2 pilots</p>		<p>POWER PLANT</p> <p>Two (2) General Electric CT7-8A turboshaft engines with integral particle separators and pneumatic starters.</p> <p>LANDING GEAR</p> <p>Fixed skid type landing gear with automatic and pilot activated emergency pop-out float system.</p> <p>LOADING INFORMATION</p> <p>Basic weight 16,831 lbs Pilots (2) 400 lbs Engine oil 33 lbs Windshield Washer Fluid 4 lbs Manuals 10 lbs Two additional crew 400 lbs Loose SAR equipment <u>200 lbs</u> Operating Weight 17,878 lbs</p>
--	--	---

***GENERAL SPECIFICATIONS
AGUSTA WESTLAND AW139 (IFR) TWIN TURBINE HELICOPTER**

**specifications may vary between operators' configurations*



DIMENSIONS		POWER PLANT			
Length	54.7 ft	Two (2) Pratt & Whitney PT6C-67C turboshaft engines with FADEC			
Height	16.3 ft	LANDING GEAR			
Width (landing gear)	10.0 ft	Retractable tricycle landing gear with emergency pop-out float system			
Main Rotor Diameter	45.3 ft	LOADING INFORMATION			
CARGO/BAGGAGE		Basic weight			
Tailboom cargo space – 120 cu ft		8,600 lbs			
Internal cabin dimensions – 8.9 ft L x 6.9 ft W x 4.6 ft H		Pilots x 2 (offshore survival gear)			
Sliding doors on both sides – 5.5 ft wide each		500 lbs			
SPECIFICATIONS		Max fuel (standard tanks only)			
Max ramp gross weight	14,219 lbs	Operating weight			
Max T/O weight	14,110 lbs	11,908 lbs			
Average basic weight	8,600 lbs	Maximum gross weight			
External sling load	TBD	14,110 lbs			
Standard fuel capacity	413 gal / 2,808 lbs	Minus operating weight			
Aux fuel tank	132 gal / 898 lbs	11,908 lbs			
Fuel consumption	150 gph / 1,020 gph	Total Payload			
Average cruise speed	140 knots	2,202 lbs			
Max range with aux tank & reserves	430 n mi	**FUEL REQUIRED – includes ~30 minutes reserve fuel			
Passenger seats (offshore)	12	TOTAL	**FUEL	PAYLOAD	FLIGHT
Crew (pilots)	2	DISTANCE	REQUIRED	OUTBOUND	TIME
		430 nm	3,670 lbs	1,340 lbs	3.1
		250 nm	2,336 lbs	2,674 lbs	1.8
		100 nm	1,214 lbs	3,796 lbs	0.7

***GENERAL SPECIFICATIONS
LOCKHEED C-130A HERCULES**

**specifications may vary between operators' configurations*



DIMENSIONS		POWER PLANT			
Length	97.8 ft	Power Plant	Four (4) Allison T56 engines; 3,750 SHP each		
Height	38.3 ft	LANDING GEAR			
Wingspan	132.6 ft	Retractable			
DISPERSANT PAYLOAD	3,250 gal	LOADING INFORMATION			
SPECIFICATIONS		Basic Weight	~60,000 lbs		
Max Gross Weight	124,200 lbs	Full Fuel	Unknown (depends on configuration)		
Average Basic Weight	~60,000 lbs	Pilots / Crew	600 lbs		
Fuel Capacity	Unknown (depends on configuration)	Operating Weight	Unknown without fuel load		
Fuel Consumption	575 - 800 gal per hr (dependent upon altitude / airspeed)	Max Gross Weight	124,200 lbs		
Average Cruise Speed	298 knots	Minus Op Weight	Unknown without fuel load		
Maximum Range	2,000 n mi	Total Dispersant Payload	3,250 gal / ~26,000 lbs		
Passenger Seats	Not Authorized	TOTAL	**FUEL	PAYLOAD	FLIGHT
Crew	2 pilots 1 Flight Engineer	DISTANCE	REQUIRED	OUTBOUND	TIME
		2,000 n mi	Full	None	7.0
		1,400 n mi	Unknown	26,000 lbs	4.5
**FUEL REQUIRED – includes ~30 minutes reserve fuel					

A.4 DISCUSSION OF SHELL TECHNOLOGIES AND SYSTEMS

For information purposes, Shell is providing Table A-6 to further describe the response assets available to deploy in the event of a spill in the Chukchi Sea. Shell has reviewed the ADEC BAT 2004 Conference Report issued in June 2006 and has adopted the following recommended technologies for the purposes of this OSRP. While not a regulatory requirement, the capping system is included in Table A-7 for informational purposes only. Shell has also selected response equipment for the containment and recovery of oil and the potential burning of oil that is considered to be the BAT for conditions commonly found in the Chukchi Sea. Brief descriptions of these technologies and systems follow:

**Table A-6
Response Assets Available to Deploy**

TECHNOLOGY / SYSTEM	DESCRIPTION
Annular water injection	Annular water injection is considered a proven breakthrough technology. It can be used during a spill response to expedite the transfer of discharged oil from a temporary storage tank to a more permanent storage facility. The technology involves reducing the discharge line pressure of a discharge hose by injecting a sleeve of water through the hose as the oil is pumped. The reduced pressure results in faster transfer rates and therefore, faster recovery time.
GT-A pumps	GT-A pumps are considered BAT and are used for lightening of viscous oil. During a spill response, the pumps significantly aid in the recovery efforts by accelerating the transfer rate for the discharge.
Transrec 150 Weir Skimmer	Transrec 150 weir skimmer is a well-proven recovery system and selected by major response organizations, including SERVS, MSRC, and the NOFO, as the primary open-ocean-skimming device. NOFO has performed extensive field tests of the Transrec skimmer both in actual spill events and open ocean trials using free crude oil. Shell's OSR assets include four (4) Transrec 150 weir skimmers. The offshore OSR barge is equipped with two (2) skimmer units mounted near the stern of the vessel, port and starboard. The two VOSS, staged within 42 hr of the drill site, are each equipped with one skimmer unit mounted near the stern of the vessel. This configuration permits the self-propelled, floating skimmer heads attached to a 312-ft (95-m) umbilical hose to be maneuvered into the thickest oil layers within the apex of the containment boom for optimum recovery. Each Transrec 150 has a name-plate recovery capacity up to approximately 2,516 bbl/hr (400 cu m/hr), giving Shell's OSR skimming capability a combined total capacity up to 10,064 bbl/hr (1,600 cu m/hr).
Lamor-Lori Brush Skimmers	Lamor-Lori brush skimmers, each consisting of two (2) five parallel stiff-brush chains, were selected as proven systems for conducting recovery operations. Shell's OSR vessel and nearshore OSR barge are each equipped with two of these over-the-side skimming packages, yielding a total name-plate recovery capacity of approximately 2,580 bbl/hr or 410 cu m/hr for each vessel. The unique Lamor-Lori Recovery Channel design recirculates surface water back into the recovery area, increasing the system's overall throughput efficiency. The skimmer automatically separates oils, emulsions and oily debris/ice from sea water making efficient use of on-board storage. Recovered oil normally contains less than 5 percent free water.
Lamor-Lori Brush Skimmers	Lamor-Lori brush skimmers were selected as the primary recovery system for Shell's 47-ft, self-propelled skimmer that will be stored on, and launched from the OSR barge. This skimmer is capable of operating effectively at vessel speeds of 2 to 3 knots, which results in much higher oil encounter rates than other types of advancing skimmers. The built-in skimmers, one on each side of the vessel, with a name-plate recovery capacity of approximately 516 bbl/hr (82 cu m/hr) gives this system a total potential recovery of approximately 1,032 bbl/hr (164 cu m/hr). This skimming system is ideally suited for a broad range of oil viscosities; it can operate in adverse weather and sea conditions; and, it is sufficiently maneuverable for the recovery of oil trapped or herded in pockets against ice.

**Table A-6
Response Assets Available to Deploy (Continued)**

TECHNOLOGY / SYSTEM	DESCRIPTION
Vertical Rope Mop Skimmers	Vertical Rope Mop Skimmers by Crucial Inc. have been selected as part of Shell's backup recovery system, each skimmer consists of eight continuous loops of oleophilic fiber mops with a combined name-plate capacity of approximately 503 bb/hr (80 cu m/hr). Stored onboard the OSR vessel, two of these skimmers provide an additional 1,006 bbl/hr (160 cu m/hr) recovery potential. Operated from a crane over the side of a skimming vessel or barge, these skimmers allow for the placement of the mops directly into heavy pockets of oil contained within a boom or trapped by ice.
Duplex Disc/Brush Skimmers	Small Duplex Disc/Brush skimmers with a floating Lobe Pump, providing for the careful placement of a skimming device into smaller pockets of oil (within a boom or trapped among ice cakes). Two of these disc/brush skimmers, each rated at approximately 88 bbl/hr (14 cu m/hr), will be located onboard the primary OSR vessel, giving flexibility for the recovery of oil from isolated pools. Their combined recovery potential represents another approximately 176 bbl/hr (28 cu m/hr).
RubberMax Boom	Made of vulcanized neoprene and hypalon, and is a durable, inflatable boom for use in open water and light ice conditions. The boom is manufactured to International ISO 9001-2000 Standards; has a high buoyancy-to-weight ratio; and, comes with a high visibility orange color. A complete system consists of a reel, power pack, and 200 m (656 ft) of boom. The height of the boom is 67 inches (170 cm) with a freeboard of 24 inches (60 cm) and a draft of 43 inches (110 cm). Eight of these systems will be available on site for use in multiple configurations such as a large open-apex deflection system; deflection booms secured to an OSR vessel, providing deflection for an OSR vessel; and as independent U-boom configurations for the collection of oil.
Hydro-Fireboom Packages	Three water-cooled, Hydro-Fireboom packages, each with 500 ft (152 m) of inflatable boom [with 14-inch (36 cm) floatation and 18-inch (46 cm) skirt] are stored on Shell's OSR vessel and OSR barge. Each package is supported by two water pumps, along with long tow lines and fire hose assemblies to provide each of the booms in a U-configuration with adequate cooling seawater to keep the boom from being damaged by the intense (approximately 1,000 °C) flames of a contained oil fire. The boom is towed in a U-configuration to capture and burn contained oil, or it can be held (in a station-keeping mode) at a surfacing blowout, providing enough burn area to eliminate 10,000 to 15,000 bopd. This boom has undergone rigorous testing with pit burns and in large tanks (Ohmsett Facility in New Jersey).

**Table A-7
 Capping Stack Overview**

TECHNOLOGY / SYSTEM	DESCRIPTION
Capping Stack	<p>The Arctic capping stack, depicted in Figure A-1, is designed to be the primary response tool during a blowout scenario in the Alaskan OCS. The capping stack will be maintained and deployed from the icebreaker <i>Fennica</i> (or similar), positioned as a primary ice management vessel in the Chukchi Sea. The stack will be maintained in a ready-to-respond condition, including periodic function testing per regulations. The entire capping stack is designed to 10,000 psi, consisting of new equipment built in accordance to API 16A. Trendsetter Engineering in Houston is building and testing the capping stack.</p> <p>The capping stack is built with the primary purpose of being able to land on a failed BOP and shut the well in. The capping stack engages with the BOP through an H4 connector which latches onto the H4 mandrel on top of the BOP stack. This connection uses the metal-to-metal seal to achieve a connection to 10,000 psi. The capping stack includes a spacer spool, designed to elevate the rams and ROV control panels above the mudline cellar and several feet above the seafloor to ensure good visibility during operations. Dual blind rams are included to give redundancy in ability to shut the well in and seal. Sufficient on-board hydraulic capacity exists to engage the H4 connector on the BOP and to shut both of the blind rams. Additional hydraulic capacity is obtained from the remote subsea BOP control module. The supply umbilical on this module can be connected to the capping stack to utilize the controls on the capping stack to function all components repeatedly. Included in the capping stack for deployment is a diverter spool with side outlet valves which can be used for a soft shut in. Additionally, these sacrificial valves can be removed and flowlines can be installed on the connector to enable either a cap-and-divert scenario or a kill scenario.</p> <p>To assist with deployment, guideline funnels are installed on the main frame of the capping stack. Pressure and temperature sensors are also included, which can be monitored acoustically from any vessel in the area. All controls have been designed inclusive of standard ROV tooling, allowing any of the fleet ROVs to operate the capping stack.</p>

Figure A-1 Capping Stack



A.5 MANPOWER SOURCES AND AVAILABILITY

Through Shell's OSRO memberships (ACS and MSRC) and contracted services with ARS, and AES-RO, trained personnel from these organizations are available 24 hr per day, seven days per week to deploy and operate spill-response equipment. Onshore support personnel may include, oil spill responders, wildlife rehabilitation specialists, and other operations support personnel. NSSRT personnel (Tactic L-8) and ACS ACRT (Tactic L-9) would be a source of available trained responders and support staff. Recent reports depicting available responders beyond those already pre-staged on Shell-chartered vessels are presented within this section, which include but are not limited to the NSSRT and ACRT.

In the event of an oil spill, non-essential project personnel identified for the NSSRT would be relieved from their various work sites to free up bed space and other support infrastructure for the use of response personnel. In addition to these entities, there are other provisions through which trained personnel as well as equipment are available. For example, ACS has master service agreements with numerous (more than 30) contractors (ACS Tactic L-9). APICOM has a mutual aid agreement to provide equipment and personnel to members on an as-available basis. Accessing these resources is described in ACS Tactic L-10, which is also provided in Appendix C. Appendix G provides a listing of logistical support vendors and suppliers specific to Alaska.

It is recognized that the onshore Operations group in particular may require additional facility support due to the limited infrastructure in the area. Trajectory models show that there are six days at minimum before oil could possibly be in the onshore area. This provides ample time to work with logistics to ensure there is effective onshore support infrastructure in place. Reference Appendix G for additional logistical supply service contractors. Shell is prepared to mobilize rapid deployment man camps that are fully air transportable by readily available commercial aircraft for immediate mobilization. These camps can be deployed, erected and functional in less than five days. As per Appendix A and G, Shell has contracts and arrangements with multiple, proven and reliable, vendors to provide turn-key, short-notice services as needed.

The information presented below is an example summary report of personnel available through the North Slope Mutual Aid Agreement and ACS Tactic L-8. ACS reports are updated on a quarterly basis and are available upon request.

July, 2013

Company	5-Jul	15-Jul	21-Jul	27-Jul	AVG
Alyeska	12	10	9	10	10.25
ACS	38	41	38	37	38.50
BP Exploration	60	74	68	61	65.75
ConocoPhillips	29	30	30	27	29.00
Pioneer	9	8	10	9	9.00
Savant	6	7	6	6	6.25
Eni	6	2	5	5	4.50
TOTAL	160	172	166	155	163.25

Company	Target	Average	MIN	# Days Below Target
Alyeska	6	10.25	9	0
ACS	20	38.50	37	0
BP Exploration	49	65.75	60	0
ConocoPhillips	28	29.00	27	1
Pioneer	4	9.00	8	0
Savant	4	6.25	6	0
Eni	4	4.50	2	1
TOTAL	115	163.25	155	0

This report shows only the number of qualifying responders. These responders have current hazwoper, full or half face fit test, and hazwoper physical, according to Alaska Clean Seas records.



**Auxiliary Contractor Response Team General Activities
Example Summary of ACRT Availability**

Description	TOTAL	12 Hour	24 Hour	48 Hour	72 Hour
CCI	per contract 80-130				
General Laborer	87	23	29	30	5
Skilled Tech	68	17	21	25	5
Team Leader	10	3	3	4	0
Vessel Op. N/S	5	1	1	3	0
Vessel Op. O/S	4	2	1	1	0
PENCO	per contract 100-130				
General Laborer	102	59	31	8	4
Skilled Tech	67	41	15	7	4
Team Leader	34	20	10	3	1
Vessel Op. N/S	5	2	2	1	0
Vessel Op. O/S	1	1	0	0	0
SWS	per contract 150-200				
General Laborer	162	9	15	62	76
Skilled Tech	28	3	4	8	13
Team Leader	14	2	7	3	2
Vessel Op. N/S	0				
Vessel Op. O/S	0				
TOTAL ACRT General Laborers	351				

Description	TOTAL	12 Hour	24 Hour	48 Hour	72 Hour
VRT	per contract 20-50				
General Laborer	64	46	7	7	4
Skilled Tech					
Team Leader					
Vessel Op. N/S					
Vessel Op. O/S					

**Total Responders 415
(ACRT + VRT)**

Generated by ACS, the Auxiliary Contractor Report above illustrates the available auxiliary contracted personnel during the third quarter of 2013. Quarterly callouts are used to generate the summary of ACRT availability.

This summary is provided for illustration purposes only. The most current report is available upon request.

A.6 INSPECTION AND MAINTENANCE PROGRAMS [30 CFR 254.24(b)]

Shell OSROs and response contractors perform routine inspection and maintenance of all response and prestaged land-based equipment.

Shell's OSRO, ACS, holds the following USCG classifications:

- River/canal environments: Classes MMPD, WCD1, WCD2, and WCD3;
- Inland environments: Classes MMPD, WCD1, WCD2, and WCD3;
- Nearshore environments: Classes MMPD, WCD1, WCD2, and WCD3;
- Offshore: Classes MMPD, WCD1, WCD2, and WCD3; and
- Open ocean environments: Classes MMPD, WCD1, WCD2, and WCD3.

ACS, has fulfilled the equipment maintenance and testing criteria that these classifications require. ACS Tactic L-6 lists available equipment and a summary of the preventative maintenance program.

Response equipment that is pre-staged on vessels or at Wainwright will be stored so that it can be rapidly deployed and maintained in response-ready condition. During the drilling season, monthly inspections will be performed on all offshore oil spill response equipment and pre-staged in Wainwright as provided for in Shell Tactic LE-1 and LE-3. Records of equipment inspections will be maintained by contractors.

ARS performs preventive, routine, corrective, and major maintenance and repairs on Shell's OCS response equipment including the TransRec 150 Skimmer Systems. Complete maintenance records are maintained by ARS in a database, such as the Comprehensive Equipment Maintenance Management System.

ARS manages the Anchorage CRF as a logistical and maintenance center. The 20,000 ft² CRF sits on approximately 2.5 acres of secured yard. The facility has 10,000 ft² of shop space with 5 flow-through bays that are large enough to facilitate maintenance on, and store during the offseason, the TransRec skimmers. With an additional 6,000 ft² of office space and 4,000 ft² of warehouse space, the facility promotes functional coordination between Shell's contracted responders. ARS also provides for response personnel training at the CRF.

TABLE OF CONTENTS

APPENDIX B CONTRACTUAL AGREEMENTS [30 CFR 254.25]..... B-1

TABLES


Table B-1 Certification of Memberships and Contractual Agreements..... B-1

THIS PAGE
INTENTIONALLY
LEFT BLANK

APPENDIX B CONTRACTUAL AGREEMENTS [30 CFR 254.25]

Certification of contracts or membership agreements with OSROs, cooperatives, spill-response service providers or IMT members who are not employees that are cited in the OSRP are outlined in Table B-1.

**Table B-1
Certification of Memberships and Contractual Agreements**

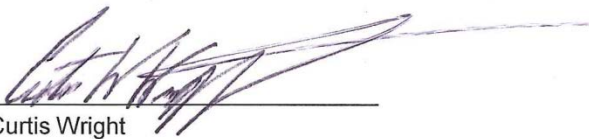I hereby certify that Shell Gulf of Mexico, Inc. currently has a contract or membership agreement with the following service providers:			
SERVICE	COMPANY	BEGINNING DATE	ENDING DATE
Equipment Provider – Vessels	Harvey Gulf International Marine, LLC	February 1, 2010	Ongoing
Equipment Provider – Vessels	Crowley Marine Services	November 17, 2006	Ongoing
Equipment Provider – Barges	Crowley Marine Services	April 26, 2011	Ongoing
Equipment Provider – Barges	Crowley Marine Services	May 1, 2007	Ongoing
Equipment Provider - Vessels	Edison Chouest Offshore	January 1, 2007	Ongoing
Equipment Provider – Vessels	ST Shipping & Transport PTE Ltd of London	January 31, 2007	Ongoing
Oil Spill Primary Response Action Contractor*	Alaska Clean Seas	December 22, 2008	Ongoing
Oil Spill Primary Response Action Contractor*	ASRC Energy Services	January 15, 2007	Ongoing
Oil Spill Primary Response Action Contractor*	UIC Arctic Response Services	October 2013	Ongoing
Response Services	Marine Spill Response Corporation	December 31, 1994	Ongoing
Equipment Provider and Personnel	Superior Energy Services, Inc.	December 18, 2011	2016
The subject contract or membership agreements provide immediate access to available personnel and/or equipment on a 24-hour per day basis.			
<p>Signed:  Curtis Wright</p> <p>Title: <u>Emergency Response Coordinator</u></p> <p>Date: <u>December 6, 2013</u></p>			

* State of Alaska PRAC registration established in accordance with AS 46.04.035 and regulations at 18 AAC 75, Article 5.

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

TABLE OF CONTENTS

APPENDIX C WORST CASE DISCHARGE SCENARIO [30 CFR 254.26] C-1

C.1	WCD VOLUME [30 CFR 254.26(a)].....	C-1
C.2	TRAJECTORY ANALYSIS [30 CFR 254.26(b)]	C-2
C.3	ENVIRONMENTAL RESOURCES [30 CFR 254.26(c)].....	C-4
C.4	WCD RESPONSE [30 CFR 254.26(d)]	C-5

FIGURES

Figure C-1	Worst Case Discharge, Day 30 of Trajectory	C-3
Figure C-2	Offshore Blowout Mechanical Operations Organization	C-9
Figure C-3	Primary Response to an Offshore Blowout.....	C-10
Figure C-4	ACS Tactic L-10.....	C-17

TABLES

Table C-1	Worst Case Discharge Location.....	C-1
Table C-2	U.S. BSEE Worst Case Discharge Volume Exploration Well Blowout.....	C-1
Table C-3	Worst Case Discharge Major Equipment	C-7
Table C-4	Personnel Resources for Worst Case Discharge	C-16
Table C-5	Response Strategy Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions	C-19

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

APPENDIX C WORST CASE DISCHARGE SCENARIO [30 CFR 254.26]

This WCD scenario was prepared to comply with BSEE regulations in 30 CFR 254.26. It is prepared as an illustration of the spill and response conditions that could be expected in the event of a WCD. The scenario makes certain assumptions about spill conditions and describes equipment, personnel, and strategies that would be used to respond to a WCD.

Spill response decisions depend on safety considerations, weather, and other environmental conditions. It is the discretion of the IC and PIC of the spill response to select any sequence or take time as necessary to employ an effective response without jeopardizing personnel safety. In any incident, personnel safety is considered the highest priority.

Depending on conditions, some equipment named in the scenario may be replaced by functionally similar equipment.

Greater responses than illustrated in this scenario can be mounted with additional in-region resources and the mobilization of out-of-region resources as needed.

The scenario provides a simulation of a WCD with the type of responses that could be employed to the maximum extent practicable.

C.1 WCD VOLUME [30 CFR 254.26(a)]

**Table C-1
 Worst Case Discharge Location**

TYPE OF OPERATION	FACILITY NAME ID NO.	BLOCK NO. WHERE THE SPILL ORIGINATES	DISTANCE IN MILES FROM THE SHORE
Exploratory	02117	Burger	60 n mi (69 mi)

**Table C-2
 U.S. BSEE Worst Case Discharge Volume
 Exploration Well Blowout**

ELEMENT	CAPACITY (bbl)	REFERENCE
Estimated Daily WCD	25,000	30 CFR 254.26
Total WCD (Daily Volume X 30 Days)	750,000	30 CFR 254.47(b)
Total Storage Capacity Requirements	750,000	30 CFR 254.26(d)(4)(i)

The WCD volume and storage capacities are calculated to address the BSEE requirements. BSEE references a 30-day timeframe [30 CFR 254.47(b)] and establishes guidelines for calculating the WCD volume (30 CFR 254.26). The WCD volume is presented for Shell's OSRP as 25,000 bopd x 30 days to total 750,000 bbl.

The WCD volume presented here is different than that presented in Shell's EP submittal. The OSRP blowout planning scenario used here for oil spill planning exceeds the WCD calculated for the EP. The EP's WCD is based on proprietary reservoir characteristics and modeling which result in a "calculated" WCD, per NTL 10-06 with the agreement and approval of BOEM. The WCD volume presented in this scenario is a "planning" volume and exceeds the daily release rate of the calculated WCD for the 30-day duration.

C.2 TRAJECTORY ANALYSIS [30 CFR 254.26(b)]


The FEIS for the Chukchi Sea Planning Area Oil and Gas Lease Sale 193 and Seismic Surveying Activities, prepared by BOEM (MMS 2007), includes an analysis of how and where offshore spills are likely to move using a computer trajectory simulation model. Simulations are performed using wind, ice, and ocean-current information for winter and summer seasons and annual conditions. The wind, ice, and ocean-currents used for trajectories were derived from a variety of sources including field and satellite observations and calculated conditions. Thousands of trajectory models were run for hypothetical spill launch locations distributed through the Lease Sale 193 area. The trajectory runs simulate the movement of oil without consideration of oil spill containment, control, or recovery actions. The trajectory model provides conditional probabilities that oil spilled from a hypothetical launch area will contact a specific land segment or environmental resource area within a given time frame.

The BOEM report describes the probabilities of oil contact from a large oil spill ($\geq 1,000$ bbl) during the drilling season to individual land segments to be typically 1 percent to 11 percent within the region between Peard Bay and Kasegaluk Lagoon (Land Segments 71 through 82). These probabilities are based on oil contacting the land segment assuming no cleanup response for the first 30 days from initial spill occurrence in the vicinity of Shell's Burger prospect drilled in 1990 (hypothetical results from launch areas LA 5, LA 11 and pipeline segment P09).

While the trajectory modeling of hypothetical oil spills for the region of concern is valuable as an indication of probable shoreline impact, Shell recognizes the need to plan for adverse wind and sea conditions that could conceivably drive oil directly toward shore and other sensitive resources. BAT has been used wherever possible, along with the expertise of ACS, to ensure that a timely and effective response is mobilized and protective measures are implemented before oil may impact priority sites. Trajectory analyses suggest that it is highly unlikely that oil could impact the nearshore environment in less than six days, at the earliest.

The simulation of the oil plume on water is based on a well blowout at the sea floor (or mudline) in water depth of approximately 140 ft. The oil rises to the surface and spreads as a function of ocean currents and wind. The oil's viscosity and emulsification tendency affects oil distribution on the sea surface. The scenario simulates the oil plume using results of trajectory modeling that includes estimating the prevailing winds and local ocean currents during a 30-day blowout. The modeling was performed by ASA. Figure C-1 depicts the WCD Day 30 Trajectory.

Figure C-1
Worst Case Discharge, Day 30 of Trajectory

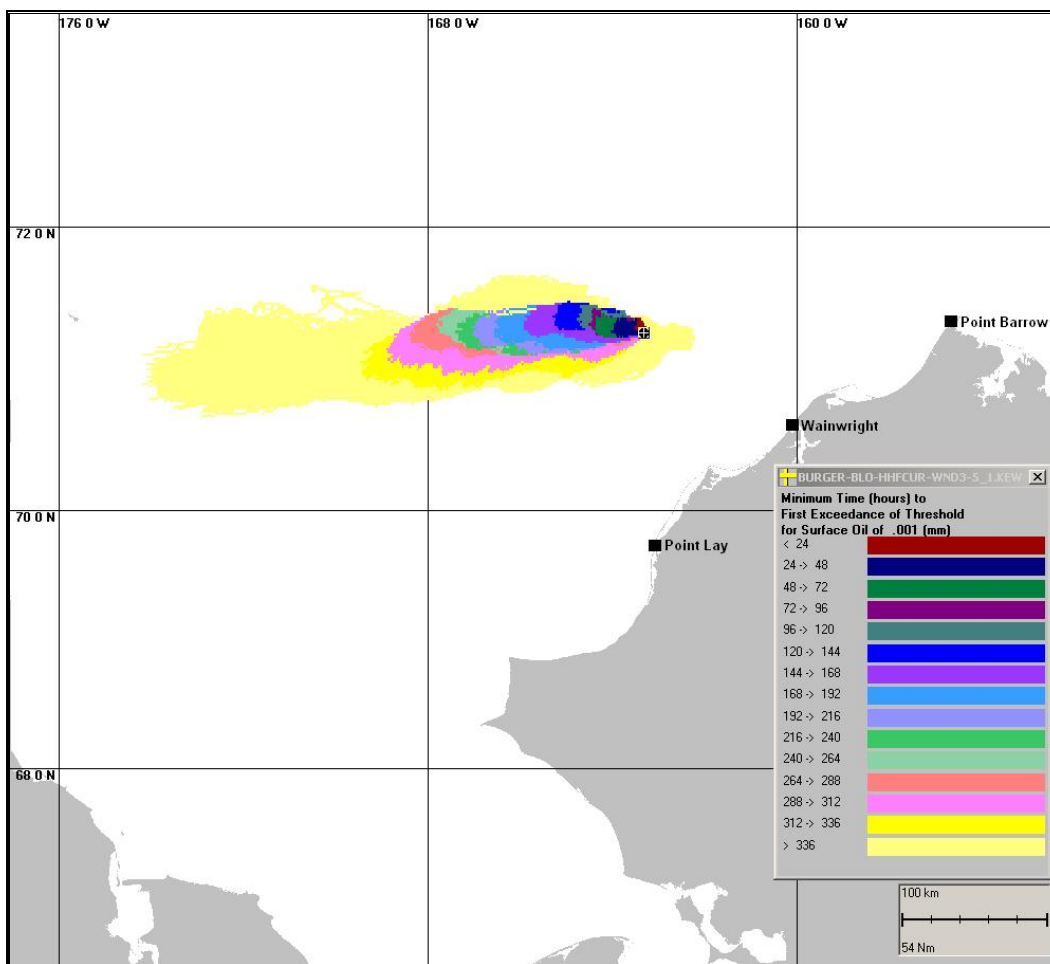

In the event of a spill, oil movement would be tracked using a combination of visual observations and remote sensing techniques, aided where practicable by GPS devices and spill-tracking software, and commercially available remote sensing techniques. Based upon availability and weather conditions, a helicopter with FLIR, vessel-mounted IR systems on board the OSR vessels, or alternative commercially available aircraft with SAR would be deployed. Overflights would include spill tracking, vessel movements, wildlife monitoring, and operational system performance.

In tandem, or in the event overflights are hampered by weather, response vessels would deploy buoys with transmitters. These systems are capable of real-time tracking of the leading edge of the oil. Oil location information is digitized and transferred to the IMT and OSC for response planning and trajectory modeling. Satellite tracking of oil is initiated (RADARSAT or EnviroSat) and coordinated with the use of tracking buoys.

The NOAA and/or ASA OILMAP trajectory models would be used to provide initial trajectory predictions based on wind speed and direction observed in the field. The trajectory model forecasts would be updated as the blowout progresses, to monitor oil movement based upon actual field measurements.

C.3 ENVIRONMENTAL RESOURCES [30 CFR 254.26(c)]

The NOAA ESI Maps, ACS Map Atlas, and the North Slope Subarea Contingency Plan are used to identify areas of concern. As part of the Planning Section, the EU Leader would coordinate with resource agency representatives and local representatives to prioritize resource sensitivities and activate protection guidelines. The Cultural Resource Specialist and SHPO would coordinate to identify sites of concern and advise Operations of necessary site protection needs. Shell's EU would begin development of a shoreline protection plan, and SCAT, would be placed on standby. For the purposes of this scenario, implementation of protection tactics would be completed for the sensitive areas. Protection sites PS-168, PS-169, PS-170, PS-171, PS-172, PS-173 and PS-174 are identified along the Chukchi Sea coastline for priority exclusion or deflection booming.

Based upon historical wind data and the MMS current model, the ASA trajectory predicts that, without containment and recovery, the earliest potential oil contact with shorelines would not occur until Day 28. However, in the unlikely event strong, sustained winds develop out of the WNW, trajectory modeling estimates that Day 6 is the earliest possible time oil could reach shore. The remainder of discussion regarding the WCD is based upon the assumption that WNW winds do develop. Therefore, response includes nearshore and shoreline protection strategy and tactics. The WNW wind is used for planning purposes and does not correspond to the actual prevailing E, NE, and ENE winds typical in the area. As a precaution, Shell OSRO and response contractors would be mobilized to implement protection strategies at priority resource sites. In addition, the Nearshore OSR barge (TF-6) would be mobilized from its staging location to arrive in the Peard Bay vicinity within 4 days, to support nearshore protection and recovery if sustained WNW winds develop.

Trajectory modeling would be performed throughout the response using field-collected data to track oil and assess protection priorities. TF-6 is mobilized to be centrally located to perform nearshore free oil recovery and support task forces and shoreline protection sites. Nearshore and shoreline operations will utilize equipment and personnel on the OSR barge and additional resources mobilized by Shell. The shoreline protection task force (TF-7) would mobilize to deploy exclusion booms at protection sites if needed as identified through aerial surveillance activities and trajectory analyses. These sites are prioritized and boomed in order of proximity to the spill. TF-7, involving free oil recovery, shoreline protection, and shoreline containment and recovery are mobilized well in advance of any oil that escapes the offshore response and recovery operations. Personnel from ACS and ARS, supplemented with backup response teams from the NSSRT, ACRT, and VRTs (reference Appendix A), can be mobilized on short notice to deal with oil in the unlikely event that it could threaten any of the nearshore and shoreline environments along the Chukchi Sea. Individuals on these teams are also trained in Wildlife Protection strategies.

Upon receiving notification of a spill event, Shell would direct ACS to initiate their MSA with Crowley Marine Services, through the direction of the Shell IC, to transport six, or more, small capacity (249 bbl) spill response tank barges, and three Type D Workboats. These assets and all support equipment (i.e. skimmers, pumps, hoses, shoreline storage, and PPE) would be transported to a location within three to four days (see ACS Tactic L-3, Table 4). The ACS MSA with Crowley provides for the utilization of one of two tank barges located at West Dock on the North Slope of Alaska (referencing ACS Tactic L-4 Vessel Table). Additional resources could be requested for response, and delivered in an equivalent time frame, by using the additional Crowley-200 Series Barge and River Class tug located at West Dock.

Once on location, TF-8 would be divided into teams and would utilize skimmer, hoses, pumps, and portable tanks listed in this OSRP to contain and collect product. Once storage capacity is approaching the limits of onshore portable storage, a vessel would supply a 249 bbl barge to location for transfer of product. The three Type D workboats would manage the six 249 bbl barges to maintain a constant loading and offloading transfer process. Onshore Recovered product would then be transferred to either the *Endeavor* barge on site, Crowley 160-4 located within three to four days transit, Crowley 180-1/160-1 located within seven to eight days transit, or similar tank barge configuration.

Tactics in the shallow coastal and nearshore environments of the Chukchi Sea are best carried out using relatively small response boats. Shell may mobilize numerous small workboats and landing craft to support these operations providing for the transport of people and equipment to remote locations. These shallow-draft response boats are flexible platforms for conducting response activities in the changing conditions of the Chukchi Sea. The nearshore / shoreline response concept is to use smaller, more maneuverable vessels to conduct shoreline protection and cleanup operations, even in light concentrations of broken ice. The smaller vessels are better able to access pools of collected oil against an ice edge, move between ice cakes and floes, and respond more quickly to changing weather and ice conditions.

C.4 WCD RESPONSE [30 CFR 254.26(d)]

In the event of a WCD or Tier III event, Shell would activate their IMT and mobilize necessary resources to provide adequate spill response. Shell has pre-planned an operational approach to a WCD that establishes task forces based upon specific recovery capability and objectives. The operational approach for mechanical response to the WCD is depicted in Figure C-2.

Shell has chosen a conservative transit speed of ten knots for offshore response vessel resources. Although service and maximum speeds for these vessels are significantly faster, the planning speed for response purposes has specifically been reduced to show robust response capability even in heavy sea conditions, reduced visibility, and requirement for additional power that may be necessary in the presence of ice. All major response assets are designed and certified for operation in arctic conditions, including operation in high ice concentrations. The transit speed for the nearshore OSR barge is reduced to 5 knots to provide for similar planning considerations. Please refer to Appendix A for further information regarding vessel capabilities and, if applicable, class notations. Shell will have the following OSR vessels staged and available during drilling operations to provide response support for any type of oil spill, including a WCD event.

- OSR vessel and OSR barge, stationed near the drillship while drilling into liquid hydrocarbon-bearing zones in the Chukchi Sea;
- Two VOSSs stationed within 42 hours of the drillship while drilling into liquid hydrocarbon-bearing zones;
- OSR barge, stationed along the Chukchi Sea coast or in an area not more than 96 hours from the Chukchi Sea nearshore zone while the drillship is drilling into liquid hydrocarbon-bearing zones; and
- OST stationed in an area not more than 24 hours from the Chukchi Sea drill site while drilling into liquid hydrocarbon-bearing zones. The OST would be the Arctic tanker *Affinity* or similar (70,000 gross metric tons, with a storage capacity of at least 513,000 bbl).

Table C-3 provides a list of major equipment that would support primary mechanical response to an offshore blowout. For Shell-chartered assets, activation and mobilization time is incorporated in the total time to the site, as response equipment is pre-staged on offshore and nearshore response vessels for immediate deployment throughout the drilling season. These task forces are identified in Table C-4, which illustrates the response equipment available to each task force. For consistency with the ACS Technical Manual and Shell Tactics Manual, mobilization times provided in Table C-4 include load-out times for response assets, and are the combined times to get assets out of storage, prepare them for operation, and make them ready to travel. For offshore response, the mobilization time is “0” as each TF’s equipment is pre-staged on-board. Figure C-3 is a pictorial overview of the described primary response assets in recovery mode. Response equipment, materials, support vessels, and strategies described herein are suitable within the limits of current technology for the range of environmental conditions anticipated.

While Shell has demonstrated access to dispersant inventory and application equipment as well as *in situ* burning, treatment of a spill by these countermeasures is not represented in Table C-3. For example, with the dispersant inventory available to Shell within 24 hours [25,000 gal on scene + 3,200 gal (MSRC)] approximately 13,428 bbl of oil may be dispersed. Continued use of these response strategies may be performed as outlined in the Dispersant Use Plan (Appendix D) and *In Situ* Burning Plan (Appendix E).

On a daily basis, Shell provides the immediate spill response equipment within the Chukchi Sea through direct charter or contract. In addition, Shell can mobilize the OSR barge to provide personnel and equipment for nearshore response operations (Shell Tactics LE-1 through LE-4, and ACS Tactics L-1 through L-12). Shell, through ACS and ARS can mobilize personnel and equipment for shoreline protection and response along the Chukchi Sea coast (ACS Tactics L-1 through L-12). Refer to Table C-4 for the numbers and types of Shell personnel on site.

Depending on the severity of a situation, federal and state logistics may also support the response. Examples of these functions include ordering, tracking and servicing government resources, arranging for transportation and lodging for government response staff, providing communications to government oversight staff, and performing other logistical functions specifically in support of the government oversight role. These governmental functions may become an integral part of the UC Logistics Section.

**Table C-3
Worst Case Discharge Major Equipment**

EQUIPMENT DESCRIPTION				RECOVERY CAPABILITIES (bb)		EQUIPMENT LOCATION			DEPLOYMENT TIMES			
TASK FORCE	ASSET	QUANTITY	OWNER	EDRC	DE-RATED STORAGE	STORAGE AREA	STAGING AREA	DISTANCE TO SITE	MOBILIZATION ^a	TRANSIT	DEPLOY ^b	TOTAL
TF-1	OSR Vessel (300-ft)	1	Shell Charter	12,384	11,400	Vessel On Site (Equipment Pre-Staged on Vessel)	Chukchi Sea	< 10 n mi	0	< 1 hr	<1 hr	1 hr
	34-ft Work Boat (Shared with TF-2, 4, & 5)	3										
	Lamor LSC-5 Brush Skimmer	2										
	Ocean Boom	2,600 ft										
TF-2	OSR Barge	1	Shell Charter	24,144	76,900	Equipment Pre-Staged on Vessel	Chukchi Sea	25 n mi	0	2.5 hr	<1 hr	3 hr
	Transrec 150 Umbilical Weir Skimmer	2										
TF-3	OST	1	Shell Charter	0	513,000	Pre-Staged	Within 240 n mi	< 240 n mi	0	24 hr	0	24 hr
	Relief OST	1	Shell	0	250,000 (minimum)	TBD	TBD	TBD	<5 days	<15 days	0	20 days
TF-4	VOSS	1	Shell Charter	12,072	13,000	Equipment Pre-Staged on Vessel	Within 420 n mi	< 420 n mi	0	< 42 hr	<1 hr	< 42 hr
	Transrec 150 Umbilical Weir Skimmer	1										
TF-5	VOSS	1	Shell Charter	12,072	8,000	Equipment Pre-Staged on Vessel	Within 420 n mi	< 420 n mi	0	< 42 hr	<1 hr	< 42 hr
	Transrec 150 Umbilical Weir Skimmer	1										
TF-6	OSR Barge	1	Shell Charter	12,384	17,000	Equipment Pre-Staged on Vessel	Within 480 n mi	< 480 n mi	0	< 96 hr	< 1 hr	< 96 hr
	Support Tug for OSR Barge	1										
	Lamor LSC-5 Skimmer	2										
	34-ft Workboats	3		4,944								
	Lamor LORS-2C Brush Skimmer	2										
	47-ft Response Vessel	1										
	Coastal Boom (Shared with TF-7 & 8)	6,000 ft										
Ocean Boom	2,600 ft											

**Table C-3
Worst Case Discharge Major Equipment (Continued)**

EQUIPMENT DESCRIPTION				RECOVERY CAPABILITIES (bb)		EQUIPMENT LOCATION			DEPLOYMENT TIMES				
TASK FORCE	ASSET	QUANTITY	OWNER	EDRC	DE-RATED STORAGE	STORAGE AREA	STAGING AREA	DISTANCE TO SITE	MOBILIZATION ^a	TRANSIT	DEPLOY ^b	TOTAL	
TF-7	Conventional Boom (Shared with TF-8)	10,000 ft	Shell Charter	0	0	Equipment Pre-Staged in Wainwright	Shoreline ¹	Incident specific	< 12 ²	2 ²	3 ²	< 96 hr ³	
	Coastal Boom (Shared with TF-8)	4,000 ft											
	Shoreline Guardian Boom	4,000 ft											
	26 to 32-ft Landing Craft	4											
	Workboats	6	ACS			Prudhoe Bay	< 12	< 81	3				
TF-8	Oleophilic Skimmers	20	ACS	2,400	> 2,224	Prudhoe Bay	Shoreline ¹	Incident specific	< 12	< 81	3	< 96 hr ³	
	Bladders (500 to 2,640 gal)	36											
	Portable Folding Tank (2,500 gal)	29	ARS			> 1,323							Equipment Pre-Staged in Wainwright
	IMO Tank (6,000 gal)	1											
TOTAL				80,400	-892,847								

Notes:

^a Mobilization times for all assets listed as “0” indicate the assets are pre-staged on the vessels for immediate deployment throughout the drilling season. Loadout time is “0” for these TFs. For equipment staged in Wainwright and Prudhoe Bay, mobilization time includes loadout. Shell-chartered vessels are staged to respond within the time limits established. Transit times have been reduced to reflect the potential adverse conditions that may include heavy seas, reduced visibility, and the presence of ice that may necessitate additional power requirements.


^b Deployment times for all offshore TFs are estimated based upon equipment being readied en-route for immediate deployment upon arrival at response site.

¹ Shoreline staging location is incident specific and within two-hour transit time from Wainwright.


² Assets staged ready for immediate deployment along shoreline by Hour 96. These assets are staged in Wainwright for timely mobilization and deployment within four (4) days of being activated. Oil is not projected before six days.

³ Oil not projected before six days (Hour 144). TF-7 and TF-8 can be mobilized and pre-staged for immediate deployment within 96 hours.

**Figure C-2
 Offshore Blowout Mechanical Operations Organization**

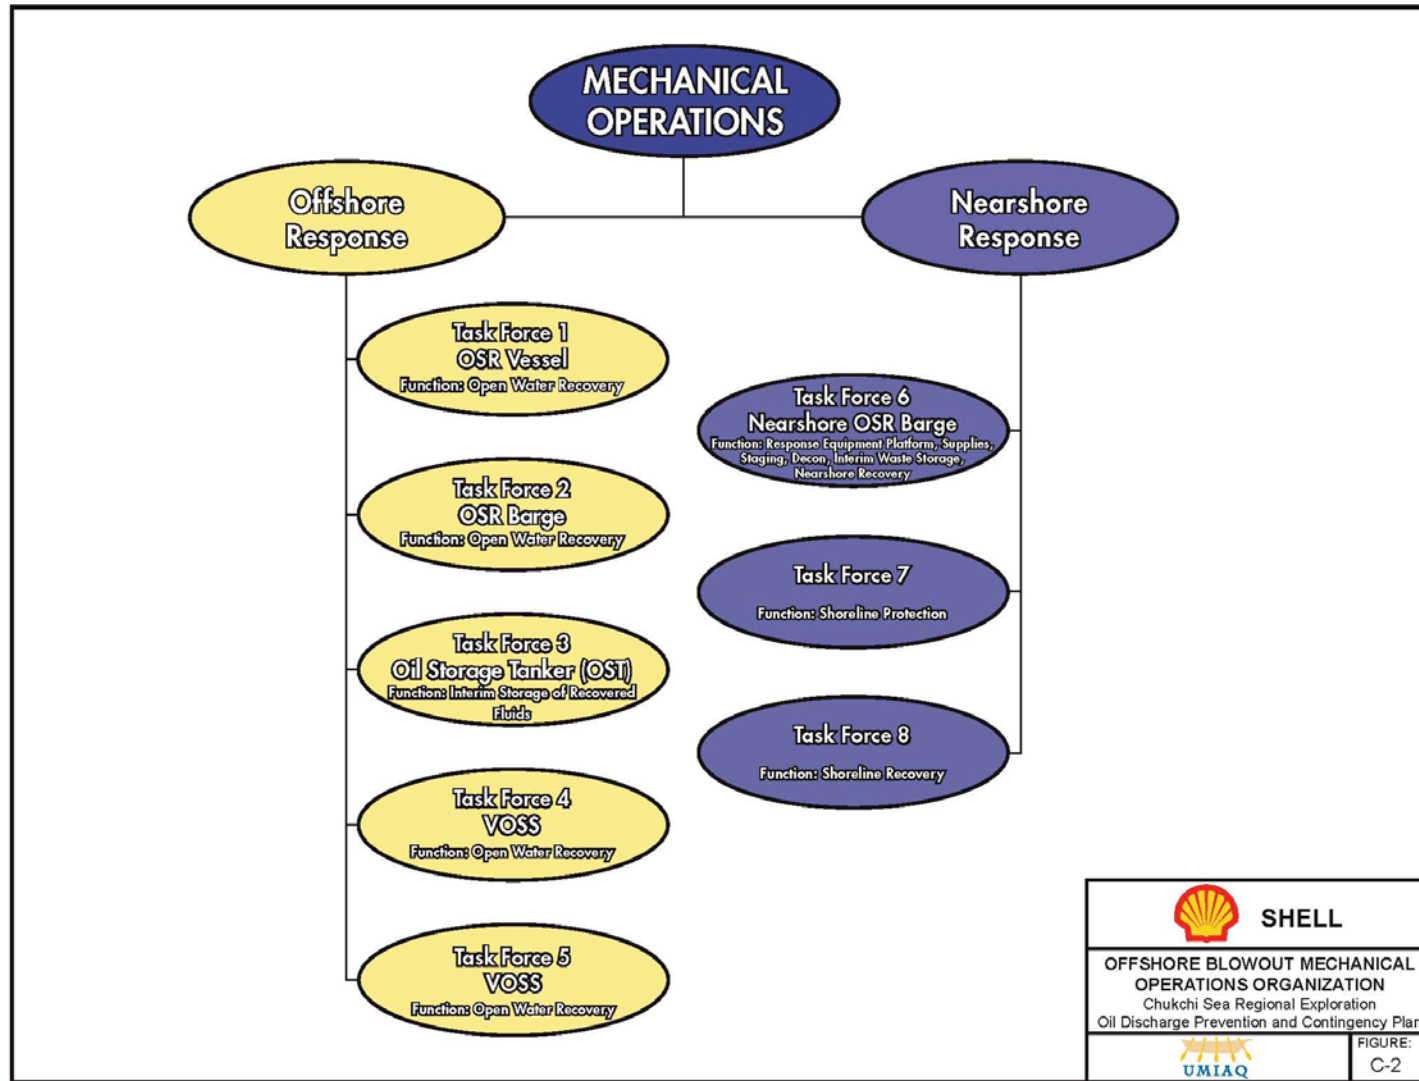

**Figure C-3
 Primary Response to an Offshore Blowout**

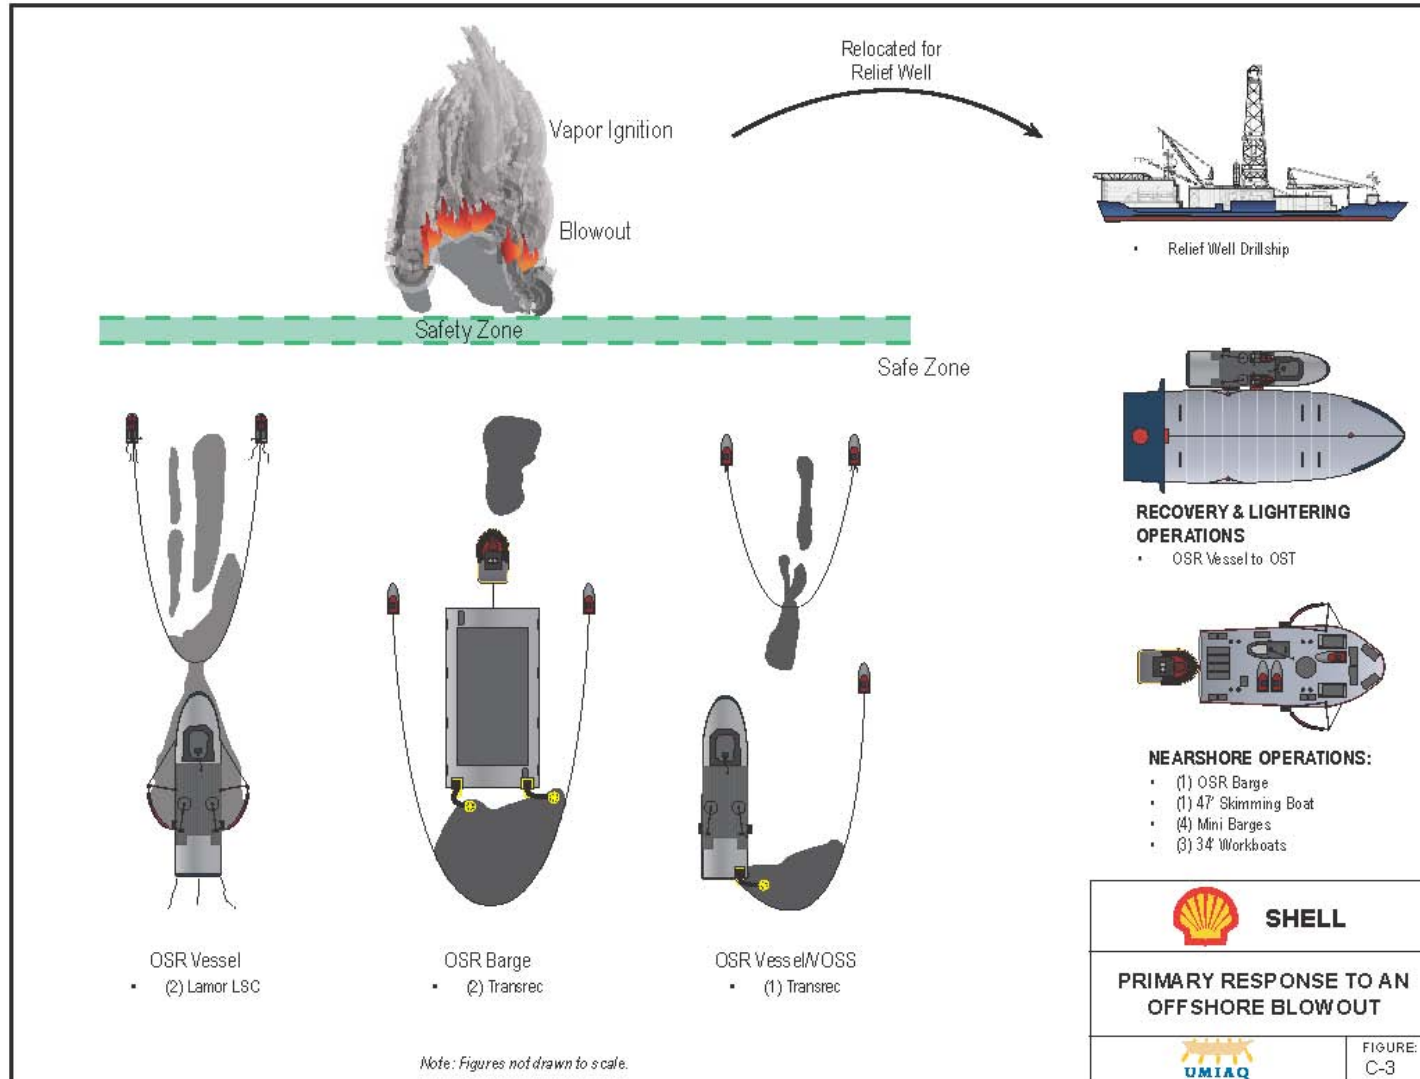

WCD Scenario

Appendix A (Table A-1) provides a complete list of equipment and resources by task force that are available and may be activated. Specific application of equipment and response resources for a WCD event are delineated in Table C-3 of this Appendix.

Shell has chosen a conservative transit speed of 10 knots for each of the offshore response vessels and the OST. Although service and maximum speeds for these vessels are significantly faster, the planning speed for response purposes has specifically been reduced to show robust response capability even in heavy sea conditions, reduced visibility, and requirement for additional power that may be necessary in the presence of ice. All major response assets are designed and certified for operation in arctic conditions, including operation in high ice concentrations. Transiting at this speed, TF-1 would be positioned to arrive at the spill site within 1 hour of the drillship. TF-1 and TF-2 with sufficient storage for recovered liquids are staged near the Shell drillship and would be used to initiate response operations. TF-1 and TF-2 are outfitted to deploy boom, high capacity skimmers, and work boats for encountering and recovering oil surfacing from an uncontrolled well blowout. By Hour 42, TF-4 and TF-5 would arrive to assist with containment, perform skimming operations, and lightering fluids to the OST (TF-3).

For planning purposes, Shell has also taken a conservative approach to the development of their OSR program with assumptions that are made to ensure adequate capability to protect sensitive areas. To scale the potential shoreline response assets needed and for planning purposes, the WCD scenario assumes that 10 percent of the 25,000-bopd discharge escapes the primary offshore recovery efforts at the blowout. The unrecovered 2,500 bopd is assumed to drift toward the mainland, driven by winds out of the WNW. In the unlikely event strong, sustained winds develop out of the WNW, trajectory modeling estimates that six days is the earliest possible time oil could reach shore, even if no containment and recovery operations were conducted. TF-6, consisting of a large, mobile OSR barge and tug, would be mobilized from its staging location, within 480 n mi of the region between Peard Bay and Kasegaluk Lagoon, and transit at a conservative planning speed of 5 knots. At this speed, TF-6 would arrive by Hour 96 in the nearshore zone of the Chukchi Sea in order to best intercept and recover oil potentially threatening the coast as allowed by water depth, weather, sea conditions and other circumstances. From this location, TF-6 can mobilize into the nearshore zone well ahead of the predicted timeframe that oil would reach shorelines for oil recovery and support of the shoreline protection task force (TF-7). TF-6 would be dispatched, as needed, to intercept the oil as described in the scenario. For purposes of the WCD scenario, it is assumed that half of the oil reaching the nearshore environment would be recovered by the skimming systems dispatched from the TF-6. The remaining 1,250 bopd are assumed to migrate toward the shoreline where Shell would mobilize response personnel and equipment to intercept the oil and deploy boom for shoreline protection. TF-6 possesses 18,636 bbl of fluid storage capacity for oil recovered from the nearshore operations. For planning purposes, 17,000 bbl is used as the nominal capacity of the nearshore OSR barge for recovered fluids.

Shoreline recovery operations are staffed by ACS and ARS personnel supplemented with NSSRT, ACRT, and VRT responders as needed. Shoreline protection and recovery task forces would set up and maintain multiple teams along the shoreline to recover oil. For planning purposes, each task force would maintain a minimum of six teams that deploy boom to intercept oil moving along the shoreline, a small skimmer, and Fastanks or bladders would be set up on the beach to hold the recovered liquids or oily waste and debris. The shoreline response teams have access to numerous storage containers (e.g., Fastanks) for oily waste storage along the shoreline. Additional temporary storage would be provided as needed using lined pits, drums,

bladders and other storage containers flown in by helicopter or transported to the areas of need with landing craft. Solid oily waste would be managed either through permitted lined storage pits onshore or transported to the nearshore barge for temporary storage. Authorization would be sought for the burning of oily solids (e.g., wood, vegetation and other combustible materials).

Adverse Weather: In consideration of the relatively limited drilling season, adverse weather conditions could most likely occur during the month of October, characterized by: diminishing daylight hours; temperatures dropping to 10°F to 20°F; increased winds; and snow accumulations onshore of approximately 4 inches. Landfast ice usually begins to form in inland areas and lagoons in late September or early October, but most of the planned project area is generally not covered by ice until mid-November or early December (Brower et al. 1988, Belchansky et al. 2004). First year (annual ice) starts to melt before, and freeze after, the multiyear sea ice (Belchansky et al. 2004). Each of these environmental conditions has the potential to reduce effectiveness of the recovery operations. Particularly in October, there may be times when the elements challenge or exceed the effectiveness of mechanical recovery capability. During these temporary adverse conditions, recovery operations may be subject to fog, high winds, high seas, or varying ice conditions. Appendix H presents more detailed information regarding weather and ice conditions.

In recognition of the limitations of mechanical equipment, Shell has provided for extending their response operations through the use of alternative response countermeasures including dispersant use and *in situ* burning. Shell has designed their OSR in consideration of the environmental conditions expected in the Chukchi Sea, and those extremes that may be encountered (e.g., reduced speeds for vessel transits). Using BAT, Shell has developed or applied tactical approaches to responding in these conditions, equipping their OSR vessels with multiple skimmers that provide for alternative approaches to recovery operations (e.g., Shell Tactic OR-2C, 2D, and 2E – OSR Vessel Alternatives in Broken Ice). Appendix H, Response Operating Conditions and Limitations, describes a wide variety of natural conditions that may affect recovery operations in the Chukchi Sea. Specifications for Shell's chartered OSR equipment are presented in Appendix A. ACS equipment information is provided in ACS Tactic L-4 through Tactic L-7.

Ice incursions may occur during the drilling season and, with the onset of fall, cold air temperatures result in the formation of new ice (typically grease ice and the formation of thin continuous layers of ice). Any continuous layers of ice, and even low concentrations of individual ice cakes or floes (such as 1/10 to 2/10 concentrations), can obstruct containment or deflection boom, prevent oil from accumulating in large pools, and block the flow of oil toward a recovery device. As these conditions develop, the efficiency of physical containment and recovery tactics will be reduced. If ice concentrations threaten the structural integrity of equipment or prevent oil from being deflected or effectively contained, the offshore response teams will use shorter outrigger/boom extensions in conjunction with skimmers in order to maneuver around large ice cakes while attempting to access smaller pockets of oil. As ice concentrations increase and mechanical recovery operations efficiencies are reduced, alternative response technologies including *in situ* burning and dispersant application will augment response operations when feasible and permitted.

As ice conditions persist, the ice-class vessels may use ice management techniques to create open leads until late in the season. The vessels would deploy rope mop skimmers and other over-the-side skimmers to access oil trapped next to or within heavier ice concentrations, until the conditions threaten the safety of personnel and/or the effective use of vessels. At this point, all physical removal tactics would cease, and cleanup operations would turn to the elimination of

oil pockets through the use of controlled burning and dispersant application, as practical. Shell Tactics OR-7 through OR-9B and ACS Tactics B-3 through B-7 would be considered for oil on water and solid surface burning or discrete application of dispersant. *In situ* burn tactics would be modified as appropriate for the controlled burning of oil herded against large ice floes, trapped within heavy concentrations of ice, accumulated in thick layers against shorelines or landfast ice. When the presence of ice precludes the use of a vessel for mechanical recovery operations, tactics for application of dispersant may be modified to extend the window for dispersant use and provide for additional mixing energy using the vessel's drives to enhance the dispersion process. In some cases, the energy induced from moving ice floes may also provide the energy needed to stimulate dispersion of oil. Burning can be accomplished with the use of heli-torches. Visual monitoring of the effectiveness of these techniques would be conducted.

At the blowout site, the potential for oil elimination using combustion may continue into periods of light to moderate ice concentrations (including new, solid ice layers) as the oil and gas released from the blowout lift and crack ice layers and leave oil exposed on or between ice cakes/floes. A heli-torch can be flown day or night and used to carry the device (heli-torch) to ignite the oil and vapors directly over the blowout. During early freezeup, ice-management vessels upstream of the blowout can enhance the efficiency of this operation by keeping large ice floes from moving in over the surfacing oil and gas where they could potentially extinguish the flames. These vessels or barges may also be positioned at a safe distance upstream of the blowout to deflect ice and create a temporary, relatively ice-free path and potentially enhance the combustion process. Oil that escapes the burn at the surfacing plume will likely be herded by wind to one side or the other of the cleared path, allowing oil to accumulate for additional burning downstream.

Any oil that avoids containment, recovery, and/or combustion during freezeup conditions would soon be encapsulated under a stable ice cover as new ice forms around and beneath the oil. The encapsulation process prevents oil from coming into contact with wildlife. Depending on the concentration of the oil and the thickness of ice and snow, methods to monitor and track oiled ice could include various commercially available options such as Shell Global Solutions Light Touch system (developed for methane detection from oil in or under ice); use of Ground Penetrating Radar; and laser fluorosensors (showing considerable potential for detecting and mapping oil).

Shell, its Alaska and International Response Teams, and Shell-contracted support from ACS, are prepared to conduct extensive monitoring and tracking of any oil that is released to the Chukchi Sea. Tracking of oiled ice may involve the release of metocean buoys and Arctic drift buoys with extended transmission capabilities, to be released at or near the spill source. Other markers may involve passive systems such as radar reflectors and brightly colored floats and flags. Together with daily weather recordings, satellite images and ice-movement modeling activities, the continued release and tracking of buoys will enable oceanographers and surveillance specialists to monitor changes in the location, speed and direction of oiled ice. While the nature and location of stable, landfast ice can vary substantially from year to year, the seasonal pack ice zone, although mobile, may experience periods of little or no ice motion. During these periods oiled ice would remain relatively close to the spill source and be easier to track.

Proven techniques for the removal (or mining) of oil from within or below landfast ice may be feasible where it is safe to access and work on a stable ice layer. Under other ice conditions, particularly with new ice and in moving broken ice, it will be impractical and unsafe to work from on the ice surface of the oiled zone because of its movement and extensive ridging and rafting of the ice.

As daylight hours increase and the ice begins to melt and weaken, the heavier deposits of oil contained beneath and within the ice would begin to move through brine channels and accumulate in melt pools at the surface. These pools would be easy to detect, they would contain oil that is nearly as fresh as when the pools were encapsulated, and they would likely remain concentrated enough to support combustion. Any oil released as fine droplets and widely dispersed would remain within the ice until the ice melts enough to expose it. These droplets would eventually surface and be herded by wind into pockets of oil that could potentially be ignited. Aerial ignition would continue well into the breakup period, as conditions for combustion allow, until it is safe to operate small skimmers in and around ice cakes and floes. As the ice rots and breaks into smaller pieces, regions of open water will appear, allowing larger containment and recovery operations to begin. Every opportunity would be used to contain and recover oil and burn residue before it could reach shorelines and other sensitive habitats.

Out-of-Region Resources

Shell's Logistics Section Chief would be responsible for activating facilities, transportation, communications, services, and material in support of an incident. The Logistics Service Branch may include communications, information technology, medical, and food units. The Support Branch may include transportation, personnel, equipment, facilities, and supplies.

Out-of-region resources, or Tier III resources beyond those identified on the North Slope, may be acquired from a variety of organizations. The current OSR program in the Chukchi is scaled appropriately for the WCD volume. In preparation for any contingency, additional information regarding the cascading of out-of-region oil spill equipment, assets, and personnel, such as staging locations and Alaska-specific infrastructure information, is presented in Appendix G. ACS has established a number of master service agreements with a variety of contractors for services that may be required in a spill response. These are described in ACS Tactic L-9.

Appendix G contains a list of vendors in Alaska that may be called upon to support Shell's spill response operations. During a Tier II or III incident, air operations will primarily be conducted from the Barrow airport. The airstrips at Wainwright, Point Hope, and Point Lay (to a limited extent) would be utilized as back-up sites, or to position response equipment, as needed, along the coast. Specifications and limitations for these airstrips are also presented in Appendix G. Additionally, Shell maintains a fleet of logistics vessels as described in the EP to provide ocean-freight service during the drilling season. In the event of emergency, Shell will have access to additional fire boom through contracts with other OSROs such as MSRC, Clean Gulf Associates, and OSRL.

Shell Logistics and their OSROs maintain call-out contracts with a variety of marine, road, aviation, and expediting and logistics management service providers world-wide to support operations. This robust logistics support network is Shell-managed and available on short notice. Much of the heavy-lift capability, either marine or air-based, would be consolidated in staging yards at either Dutch Harbor (marine) or the Anchorage airport (aviation) and forwarded to the staging areas at Deadhorse, Barrow, or Wainwright. These resources and access through ACS are detailed in ACS Tactic L-9 and L-10. Shell may mobilize additional personnel and equipment resources via ACS' APICOM mutual aid agreement described in ACS Tactic L-10. Other qualified staff can be mobilized from within the Royal Dutch Shell Group in the U.S. and abroad through Shell's SART. Through the SART link, access to as many as 2,000 Shell employees is available.

Wainwright, Barrow, Deadhorse and Anchorage have been identified as primary staging areas for personnel and other physical resources in support of a response effort. Resources may be

flown to the site via charter or commercial aircraft from any of the designated staging areas. Additional required response equipment coming from Deadhorse airport would be flown directly to Wainwright to provide onshore response support. The equipment designated for onshore support is easily transportable by multiple, readily available, aircraft in the Deadhorse area. Reference Appendix G and ACS Tactic L-4 for additional information on the region's available infrastructure and logistical considerations.

Equipment coming from out-of-region areas would be flown or trucked to the Anchorage airport for immediate relocation to the designated forward-staging areas such as Barrow, Deadhorse, or Wainwright. Depending on the equipment type, resources could be requested and on location within 72 hours. Logistic contractors are identified in Appendix G.

Shell's QI, IC, or their designee may contact other service companies if the UC deems that such services are necessary to the response effort. These out-of-region (out of the North Slope area) resources may be requested through ACS agreements as described in ACS Tactics L-8, L-9, and L-10. Appendix A (Response Equipment) provides information on the identification and access to equipment and personnel. Shell may also mobilize and activate MSRC equipment to support long-term response needs.

**Table C-4
Personnel Resources for Worst Case Discharge**

TASK FORCE	UNIT DESCRIPTION	RESPONDER POSITIONS PER SHIFT	SHIFTS PER DAY	TOTAL PERSONNEL	TASK FORCE SIZE
TF-1	OSR Response Supervisor	1	2	2	36
	OSR Vessel Deck Crew	3	2	6	
	34-ft Work Boat Operator (Shared with TF-2, 4 & 5) x 3 boats	6	2	12	
	Lamor Skimmer Operators	2	2	4	
	OSR Vessel Operating Crew (<i>Nanuq</i> or similar)	12	N/A	12	
TF-2	OSR Response Supervisor	1	2	2	23
	OSR Barge Deck Crew	3	2	6	
	Transrec Operators	4	2	8	
	OSR Barge (Tug) Operating Crew (<i>Klamath</i> or similar)	7	N/A	7	
TF-3	Tanker Deck PIC	1	1	2	20
	Tanker Deck Crew	3	2	6	
	Tanker Operating Crew (<i>Affinity</i> or similar)	12	N/A	12	
TF-4	VOSS Supervisor	1	2	2	38
	VOSS Deck Crew	3	2	6	
	Transrec Skimmer Operators	2	2	4	
	VOSS Operating Crew (<i>Aiviq</i> or similar)	26	N/A	26	
TF-5	VOSS Supervisor	1	2	2	28
	VOSS Deck Crew	2	2	4	
	Trans Rec Skimmer Operators	2	2	4	
	VOSS Operating Crew (<i>Harvey Spirit</i> or similar)	18	N/A	18	
TF-6	Nearshore Recovery Supervisor	1	1	1	19
	OSR Barge Deck Crew	3	1	3	
	47-ft Skimmer Boat Operators	3	1	3	
	34-ft Work Boat Operator x 3 boats	6	1	6	
	Nearshore Barge Operating Crew (tug) (<i>Endeavor</i> or similar)	6	N/A	6	
TF-7	Shoreline Protection Supervisor	1	1	1	37
	Shoreline Protection Labor	4	1	4	
	29-ft Work Boat (ACS Type C) Operators	4	1	4	
	18 to 26-ft Work Boat (ACS Type A & B) Operator	8	1	8	
	24-ft Work Boat Operators	4	1	4	
TF-8	26 to 32-ft Landing Craft Crew x 4 boats	8	1	16	11
	Shoreline Recovery Supervisor (Supported by TF-7)	1	1	1	
	Shoreline Recovery Labor (Supported by TF-7)	10	1	10	
Ice Management	Ice Management Vessel (<i>Nordica</i> or Similar)	30	N/A	30	30
Subsea Containment	Subsea Containment and Processing Unit	67*	N/A	67	67
TOTAL PERSONNEL				309	309

For ACS or ARS personnel, the Total is the sum of vessel operators, technicians, and general laborers. For ACS or ARS personnel, the Team Leader is a separate person.

* Staffed during incident


Shift = 12hrs TF-6, TF-7 and TF-8 operate one 12-hr shift per day.

All TF-3 tasks, including PIC, will be performed by the tanker crew with no additional response staff from Shell or ACS.

Additional support personnel availability is described in Appendix A, ACS Tactics L-8, L-9 and L-10.

**Figure C-4
 ACS Tactic L-10**

TACTIC L-10 Accessing Non-Obligated Resources (Page 1 of 2)



OIL SPILL RESPONSE COOPERATIVES

The Association of Petroleum Industry Co-op Managers (APICOM) has a mutual aid agreement to provide equipment and personnel to members on an as-available basis. Co-ops are under no obligation to provide resources. Resource availability may be restricted by either a co-op's member companies or regulatory obligations. A list of APICOM members is provided below.

APICOM MEMBERS


Cooperative	Location	Phone	Fax
Burrard Clean Operations	Vancouver, BC	(604) 985-0855	(604) 985-0955
Chadux Corporation	Anchorage, AK	(907) 278-3365	(907) 278-3330
CISPRI*	Kenai, AK	(907) 776-5129	(907) 776-2190
Clean Bay Incorporated	Concord, CA	(925) 685-2800	(925) 825-2203
Clean Caribbean Cooperative	Ft. Lauderdale, FL	(305) 983-9880	(305) 987-3001
Clean Casco Bay, Inc.	Portland, ME	(207) 828-4511	(207) 828-4516
Clean Channel Assoc., Inc.	Houston, TX	(713) 676-1318	(713) 676-2571
Clean Coastal Waters, Inc.	Long Beach, CA	(310) 432-1415	(310) 437-1510
Clean Gulf Associates	New Orleans, LA	(504) 593-6724	(504) 593-6725
Clean Harbors Cooperative	Edison, NJ	(908) 225-2301	(908) 417-3921
Clean Islands Council	Honolulu, HI	(808) 528-4449	(808) 521-7049
Clean Rivers Cooperative	Portland, OR	(503) 220-2040	(503) 295-3660
Clean Seas	Carpinteria, CA	(805) 684-3838	(805) 684-2650
Clean Sound Cooperative, Inc.	Edmonds, WA	(206) 744-0948	(206) 771-3244
COPIM St-Laurent LTEE	Levis, Quebec	(418) 833-8989	(418) 833-9649
Corpus Christi Area Oil Spill Control Assoc.	Corpus Christi, TX	(512) 882-2656	(512) 880-3299
Delaware Bay & River	Lewes, DE	(302) 645-7861	(302) 645-4006
Humbolt Bay Oil Spill	Eureka, CA	(707) 445-3002	(707) 445-4306
LOOP	New Orleans, LA	(504) 368-5667	(504) 363-9284
M.I.R.G.	MIRG	(504) 394-0893	(504) 392-2467
MSRC Gulf Region	Lake Charles, LA	(318) 437-9600	(318) 433-9678
MSRC Northeast Region	Edison, N.J.	(908) 417-0500	(908) 417-1314
MSRC Northwest Region	Seattle, WA	(206) 774-6772	(206) 774-7770
MSRC South Region	Port Hueneme, CA	(805) 986-8384	(805) 986-8388
MSRC Southeast Region	Miami, FL	(305) 375-8410	(305) 577-8523
Oil Spill Service Centre	Southampton, G.B.	011-44-703-331551	011-44-703-331972
PIER Atlantic, Ltd.	Dartmouth, NS	(902) 461-9170	(902) 461-9590
PIMEC	Ontario, Canada	(416) 492-5713	(416) 492-5713
SEAPRO	Ketchikan, AK	(907) 225-7002	(907) 247-1117
SERVS*	Valdez, AK	(907) 835-6902	(907) 835-6944

* Both CISPRI and SERVS maintain fishing vessel charter contracts for response in the event of a spill in their respective areas. Under contracts, vessel operators and deck hands are trained in spill response activities such as booming, skimming, and mini-barge operations. These vessels can be made available through either the APICOM mutual aid agreement or provisions in the specific fishing vessel contracts.

ACS Tech. Manual Vol. 1, 9/01 NOTE: All values given on these pages are for planning purposes only.

Figure C-4 ACS Tactic L-10 (Continued)

Accessing Non-Obligated Resources (Page 2 of 2) TACTIC L-10



ACCESSING STATE OF ALASKA RESOURCES

State of Alaska resources may be made available in a spill response when a compelling need can be demonstrated, such as a greatly enhanced response. The State will consider the availability of private sector resources prior to committing equipment.

The point of contact for accessing state resources is the State On-Scene Coordinator (SOSC).

The spiller will be responsible for all costs associated with mobilization, activation and/or use of State of Alaska equipment.

ACCESSING FEDERAL GOVERNMENT RESOURCES

Federal resources may be made available in a spill response when a compelling need can be demonstrated, such as a greatly enhanced response. The Federal Government will consider the availability of private sector resources prior to committing equipment.

The point of contact for accessing federal resources is the Federal On-Scene Coordinator (FOSC).

The spiller will be responsible for all costs associated with mobilization, activation and/or use of federal government equipment.

ACCESSING RESOURCES FROM OTHER C-PLAN HOLDERS

The SOSC can authorize the release of response equipment from other facilities in Alaska operating under a state-approved contingency plan. On the North Slope, these facilities are located in the villages.

NOTE: All values given on these pages are for planning purposes only. ACS Tech. Manual Vol. 1, 9/01

Introduction to the Varying Ice Strategy Table C-5

In accordance with 18 AAC 75.425(e)(1)(f), response strategies may be required by ADEC to account for variations in receiving environments and seasonal conditions. Table C-5 presents the response strategy developed by Shell to present tactics that may be employed in varying ice conditions. Table C-5 is included in this OSRP for illustration purposes.

**Table C-5
Response Strategy
Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
(i) Stopping Discharge at Source	<p>The On-site Shell Drill Foreman initiates Shell's internal emergency notification process for all on-site personnel as to the nature and severity of the blowout. Notifications are also made to appropriate state and federal agencies, including the NRC (1-800-424-8802). Shell's IMT is activated. Response personnel are notified and all offshore and off-duty response personnel are put on alert. All vessels are moved to a safe location upwind of the blowout pending the results of site characterization assessments and relocation (if necessary) of the drillship.</p> <p>Drillship prepares for a relief well if necessary. The anchor handler assists the drillship move to a safe location. The OSR vessel and OSR barge staged in the vicinity of the drillship mobilize to the blowout location and provide assistance (as needed). The OSR vessel is assigned TF-1 and begins recovery with 1 hr. Upon arrival at Hour 3, the OSR barge is assigned as TF-2 to work in conjunction with TF-1 to perform recovery operations.</p> <p>The OST on standby (within 240 n mi of the drilling location), two (2) VOSSs (staged at a maximum distance of 420 n mi from the Chukchi Sea drill site) and a Nearshore OSR barge (staged within 96 hr of the nearshore waters of Peard Bay and Kasegaluk Lagoon) are notified and mobilized immediately to support spill control efforts at the blowout location.</p>	<p>Shell LE-2 Table 1.2-3 Tables 2.7.1-1 through 2.7.1-5, Figure 1.2-1 Figure 2.7.1-1 Shell OR-2A, OR-2B, OR-2B, OR-3A, OR-10</p>
(ii) Preventing or Controlling Fire Hazards	<p>The Site Safety Officer analyzes the situation and verifies that all sources of ignition are shut down or removed from the area. The Site Safety Officer provides access zone information and determines PPE requirements. Monitoring protocol is established for all work areas to ensure personnel protection. The monitoring protocol establishes safety zones according to applicable OSHA and fire hazard standards.</p> <p>The OSC determines that ignition of the blowout warrants immediate consideration and initiates a request to the UC to ignite free gas surfacing at the well site. The UC approves the ignition of the blowout for safety reasons.</p>	<p>Shell S-1 through S-4 ACS S-1 through S-6</p>
Well Control Plan	Refer to Appendix N (Section N.4.1.8) of this OSRP.	Appendix N (Section N.4.1.8)
(iv) Surveillance and Tracking of Oil; Forecasting Shoreline Contact Points	<p>Oil movement is tracked using a combination of visual observations, remote sensing systems from fixed-wing aircraft and helicopters, and from satellites already in place for the tracking of ice conditions throughout the region (RADARSAT & EnviroSat)</p> <p>Visual observation provides the greatest potential for monitoring oil and/or ice movement on location because aircraft (fixed-wing and helicopter) play a vital role for the ongoing assessment of weather conditions, oil transport, and conditions at/near the blowout, smoke plume (if free-gas ignition is implemented), and the positioning (or "spotting") of spill control systems downstream. In addition, remote-sensing systems (e.g., FLIR) and tracking buoys and beacons are used to track oil or oiled ice during periods of reduced visibility (day or night). Tracking buoys, capable of transmitting signals to aircraft and/or satellites, play an important role in tracking the leading edge of any oil that escapes recovery or elimination on site and moves toward sensitive resources offshore, nearshore, or onshore.</p> <p>All tracking of oil and oiled ice is coordinated with NOAA and ASA to provide predicted trajectories, based upon best available weather/ice predictions and actual field observations and measurements. Spill trajectories are used to ensure that tactics and strategies are implemented to protect identified priority sites well ahead of any oil that could impact those regions. Additional sources of data could also include: MODIS imagery (Aqua & Tera satellites) and the U.S. National Ice Center.</p>	Shell TS-1, TS-2, TS-3

**Table C-5
Response Strategy
Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions (Continued)**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
<p>(v) Protection of Environmentally Sensitive Areas and Areas of Public Concern</p>	<p>The development of landfast ice along the Chukchi Sea coast is highly variable with first new ice appearing in early October to as late as the end of November. Such landfast ice can provide an effective natural barrier against oil reaching ESAs along the shoreline, and is therefore carefully monitored should any oil manage to survive the long transit from a blowout to the nearshore environment. Should oil enter and be captured within the landfast ice, any oiled ice that may break free of the shoreline would be tracked (as discussed earlier). Frequent “break-away” events can occur at almost any time throughout the freezeup and winter seasons.</p> <p>Prior to the formation of landfast ice, any oil that manages to survive and enter the nearshore environment will have been tracked and used to focus response resources (personnel and equipment) within the regions of highest potential impact. During this period, the UC, in cooperation with the SHPO, NOAA, and resource trustees would monitor oil trajectory reports, identify resources at risk and issue appropriate restrictions and advisories to response personnel in the field. Environmental specialists together with resource trustee representatives will identify priority protection sites and develop a Shoreline Cleanup Plan, including appropriate cleanup techniques and endpoints using the NOAA ESI Maps, ACS Atlas Maps, and North Slope, Alaska Subarea Contingency Plan. Shell’s OSRO and response contractors, with the Nearshore OSR barge, (TF-6) would establish protective booms at key locations to prevent or minimize the movement of oil into the most sensitive areas. It is assumed that strong NW winds could result in the movement of oil to the nearshore environment between Peard Bay and Wainwright. This stretch generally consists of low energy beaches and the inlets to the Sinaruruk River and Wainwright Lagoon between Peard Bay and Wainwright. The shoreline south of Wainwright to Kasegaluk Lagoon consists of low-energy beaches, washover fans, protected tundra cliffs and lagoons.</p> <p>TF-6, having been relocated from its standby location, moves to a central location about a mile offshore. The TF-6 barge provides additional boats, booms, and recovery equipment, decontamination facilities, communications, and a “safe haven” for boats and personnel in the event weather and/or ice concentrations force a cessation of nearshore operations. TF-6 consists of the OSR barge with Lamor LSC-5 skimmers, one (1) 47-ft skimming vessel with built-in Lamor LORS-2C brush skimmers, two (2) 34-ft workboats with duplex skimmers and four (4) 249-bbl mini-barges. TF-6 intercepts as much oil as possible before potential contact with shorelines and protection sites.</p> <p>Trajectory modeling predicts that oil escaping the offshore and nearshore “on-water” recovery operations could arrive at the shoreline, at the earliest, approximately 6 days following the blowout, if sustained winds from the WNW occur. The areas of immediate concern include the Wainwright Inlet and Sinaruruk River to Peard Bay. As a precaution in the event the wind shifts from the ENE to the WNW, response resources are mobilized to perform nearshore and shoreline containment and recovery operations (TF-6, TF-7, & TF-8). These operations would be initiated prior to Day 6 and continue until mid-day on Day 9 when the formation of new ice along the shoreline and in protected calm-water areas begins to block the movement of free oil toward the shore. Free oil recovery continues just offshore for another 24 hr until ice formation in those deeper waters begins to degrade the collection of oil with the 47-ft skimming vessels with built-in Lamor LORS-2C brush skimmers.</p> <p>As freezeup along the shoreline continues, all nearshore response activities cease, the TF-6 relocates to Peard Bay to continue nearshore recovery, and response crews focus upon the removal of oil and oiled debris that has been concentrated at (or stranded on) the beaches.</p> <p>A Shoreline Cleanup Plan is approved by the UC; however, it is recognized that shoreline access will be limited as landfast ice begins to form throughout the region. Should oil move into these nearshore waters and become entrained within the growing ice, the locations of the oiled regions will be recorded and monitored for ice movement. As ice thickness increases at these sites, stakes will be positioned to identify areas for on/in-ice recovery techniques.</p>	<p>NOAA ESI Maps ESI 14-16</p> <p>ACS Map Atlas Sheets 251 to 255</p> <p>http://www.asgdc.state.ak.us/maps/cplans/subareas.html#northslope</p> <p>MESA 4 - Peard Bay/Franklin Spit MESA 5 - Kasegaluk Lagoon MESA 6 - Cape Lisburne/Cape Lewis</p> <p>Shell SR-2, SR-3, SR-4</p> <p>Shell OR-1A, OR-1B, OR-4A,OR-4B</p> <p>Shell OR-1A, OR-1B, OR-4A, OR-4B, OR-5A, OR-5B</p> <p>ACS C-13, C-14, R16</p> <p>ACS SH-2 through SH-12</p> <p>ACS SH-1</p>

**Table C-5
Response Strategy
Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions (Continued)**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
<p>(vi and vii) Spill Containment, Control and Recovery Procedures</p>	<p>Offshore: OSR operations offshore are initiated immediately upon notification. Once site characterization efforts are completed and safe operating zones are established, TF-1 (OSR vessel) moves into position a safe distance downstream of the blowout along with its boom handling 34-ft work boats and open-ocean booms. At the time of the blowout ice-free waters allow oil to flow toward the open swath of the U-boom after it surfaces. Approval to ignite free gas has reduced the high-risk red-zone to less than ½ n mi from the surfacing oil and gas.</p>	<p>Shell OR-2A, OR-2B</p>
	<p>TF-1 consists of an OSR vessel and two (2) 34-ft workboats towing a U-boom downstream of the oil surfacing from the blowout. TF-1 operates with two (2) Lamor LSC-5 skimmers and outriggers positioned within or behind the U-boom. Oil moves into the U-boom and is concentrated and directed to the skimming system. Frequent monitoring of vapor loadings at, and just forward of, the recovery operations is carried out to ensure that boom-tending work boats and the OSR vessel remain at a safe distance downstream of the blowout.</p>	<p>Shell OR-2A, OR-2B</p> <p>ACS R-18, R-20</p>
	<p>While TF-1 and its recovery operations get underway, TF-2 (OSR barge), TF-3 (OST), TF-4 (VOSS), TF-5 (VOSS) and TF-6 (OSR barge) are already underway toward the blowout from their staging locations. TF-2 arrives on-scene at Hour 3 and replaces TF-1 to begin skimming within the U-boom towed by two (2) 34-ft workboats. TF-1 re-configures with one (1) 34-ft workboat into a J-boom arrangement for recovery. With 11,400 bbl of recovered oil storage capacity aboard TF-1, the OST arrives on scene within 24 hr (as TF-1 approaches holding capacity). Once the OST is on location, TF-1 disengages from skimming to lighter its recovered oil to the TF-3 OST while TF-2 continues recovery. TF-2 has a minimum of 76,900 bbl of storage which provides more than enough capacity to operate for the first 48 hr. At Hour 42, TF-4 (VOSS) and TF-5 (VOSS) arrive at the blowout, each equipped with one (1) Transrec 150 skimmer. TF-5 initiates skimming in J-boom configuration using a workboat (from TF-1). At Hour 48, TF-2 and TF-5 are relieved from skimming by TF-1 and TF-4. TF-2 and TF-5, with their Transrec 150 skimmers pulled on board, transit to the OST and lighter their contents over the next 24-hr period. While TF-2 and TF-5 engage in lightering operations, TF-1 and TF-4 continue recovery operations, TF-1 (replacing TF-2) operates its two Lamor side-collector skimmers within the U-boom towed by two (2) 34-ft workboats TF-4 (replacing TF-5) deploys its single Transrec in J-boom configuration using the 34-ft workboat. An alternating 24-hr cycle is established with two task forces skimming while the other two lighter their recovered oil to TF-3. The Transrec 150 and side-collector skimmers have more than adequate capacity to recover the daily oil volume released from the blowout.</p>	<p>Shell OR-2B, OR-3A</p> <p>ACS R-18, R-32A</p>
	<p>The positioning of work boats and the OSR vessel during darkness and other periods of low visibility is facilitated by the bright light associated with the burning of free gas over the blowout. In the event that surfacing gas is not ignited, infra-red imaging and lights mounted on the OSR vessel and workboats would be used to position response assets to intercept surfacing oil. Winds and currents are monitored frequently to ensure that the containment and recovery operations remain centered on the heaviest concentrations of oil downstream of the blowout.</p>	<p>Shell TS-1, TS-2, TS-3</p>
	<p>During the first few hours following the blowout, authorization had also been sought from UC for the use of chemical dispersants. The potential for dispersant application was needed for oil that would escape mechanical recovery operations downstream of the spill source when environmental conditions reduce the effectiveness of mechanical recovery methods. Dispersant application would also provide an important backup response option should wind/sea conditions or ice preclude the use of booms for mechanical recovery, and/or burning, or when important environmental resources are threatened by surface oil.</p>	<p>Shell OR-8, OR-9A</p>
	<p>On Day 2, the UC, working closely with the ARRT, grants authorization for the limited application of dispersants from a C-130 for oil that escapes mechanical operations. While the request for dispersant use was initiated and under</p>	<p>Shell OR-9A</p>

**Table C-5
Response Strategy
Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions (Continued)**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
	<p>review, an aerial dispersant task force (designated TF-D) consisting of a C-130, was mobilized to Barrow from MSRC in Arizona. Approvals are initially limited to daytime operations only, and in water depths of 30 ft (10 m) or more, outside state territorial waters. Authorization is issued for dispersant use downstream of booming and recovery operations and as the primary response option when conditions preclude the use of booms for the concentration and containment of oil.</p> <p>TF-1, TF-2, TF-3, TF-4 and TF-5 offshore response operations continue well into the second week. Minor amounts of oil escape at times when work boats and booms are repositioned, and when they are subjected to brief periods of strong wind and sea conditions (winds >20 knots and waves of 4 to 6 ft). Because of the blowout location so far offshore, oil that escapes these operations weathers, degrades, and disperses naturally. In the unlikely event oil travels to shore, dispersant use and controlled burning are ruled out for the emulsions that may survive the long transit. The nearshore and onshore response activities focus on mechanical options for the physical recovery of oil and the protection of ESAs.</p> <p>By Day 12, reductions in hours of daylight combined with dropping temperatures make it necessary to focus on oil surveillance and tracking methods suitable for lower light such as infrared radar. With the formation of grease ice and nilas (i.e., thin elastic layers of ice up to 10 cm thick that bend easily under pressure), TF-1 remains on location changing to work with short lengths of boom attached to outriggers.</p> <p>Beyond Day 14, the on-scene drilling support vessels with ice-breaking capabilities begin to break through the formation of pancake ice and large continuous layers of new ice. The ice management vessels patrol the area and move ice that can hamper normal drilling operations. They are able to manage large ice floes from interfering with relief well drilling, and they are able to minimize large ice floe interference with the ongoing oil recovery operations. By maintaining broken ice upstream of the blowout, the gas-lift from the blowout produces currents creating a relatively ice free radius around the surfacing oil and gas. Continued combustion of the free gas is therefore enhanced, minimizing any chances of flame extinguishment by heavy continuous ice layers. Oil surfacing at the blowout experiences less spreading (due to the presence of ice) and coalesces into pockets of oil. Some of these accumulations near the burning free gas ignite thereby increasing the elimination of oil at the source.</p> <p>TF-1 and TF-4 continue to alternate in recovery operations with TF-2 and TF-5 to work immediately downstream and at a safe distance from the blowout. Operating with only outriggers and/or short lengths of boom, the OSR vessels maneuver at very slow speeds through the pockets of heaviest oil concentration. Because oil encounter rates are reduced, TF-1, TF-2, TF-4 and TF-5 are able to stay on location without reaching its holding capacity several days.</p> <p>When ice concentrations preclude even the limited use of short boom lengths and outriggers, TF-1, TF-2, TF-4 and TF-5 move into pocket recovery techniques involving on-board, over-the-side skimmers. The vertical rope mop skimmer (TF-1) is suspended from a crane out over pools of concentrated oil layers, and the umbilical Transrec 150 weir skimmers (TF-2, TF-4 and TF-5) are deployed into pockets of oil confined by ice to gather oil. Such skimmers provide a means of recovering a range of oil viscosities, even in the presence of broken ice and/or slush.</p> <p>As ice concentrations continue to increase, the controlled burning of oil in fire boom ceases. The build-up of ice within the fire U-Boom configurations limits the amount of oil that can be contained, and heavy ice loadings can threaten the structural integrity of the booms. However, the burning of spilled oil within pockets created by ice remains a viable technique. The 34-ft workboats, previously used for towing boom, are used to deploy handheld igniters into such pockets of oil; and, the heli-torch (mobilized by helicopter) is used to ignite oil that has been concentrated and kept from spreading by ice. Even the 34-ft work boats are used in relatively light ice concentrations for the recovery and</p>	<p>Shell OR-2B, OR 3A</p> <p>ACS R-18, R-32A</p> <p>Shell TS-1, TS-2, TS-3</p> <p>Shell OR-2C, OR-2D, OR-2E</p> <p>Shell OR-2C, OR-2D, OR-2E</p> <p>Shell OR-2C, OR-2D OR-2E</p> <p>Shell OR-7 and Appendix E ACS B-3 Shell OR-2C, OR-2D, OR-2E</p>

**Table C-5
Response Strategy
Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions (Continued)**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
	<p>temporary storage of oil. Small over-the-side skimmers (brush and/or disc) are positioned from these boats into pockets of oil while the recovered fluids are stored in drums, totes, mini-barges, and/or bladders.</p> <p>As freezeup continues and blowing snow begins to accumulate on young ice, the pockets of oil become more difficult to find and access. By Day 21 it is no longer possible to conduct containment and recovery operations safely and effectively downstream of the blowout. All work boats, booms, mini-barges, etc. are loaded back aboard TF-1 and TF-2 and prepared for transit back to the mainland. The drillship (for relief well), anchor-handler, TF-4 and TF-5 remain on location making every effort to sustain the burning of surfacing oil and gas at the blowout. A heli-torch and/or handheld igniters are used to reignite vapors if flames are extinguished by the ice. Downstream of the burning oil/gas there is an accumulation of unburned oil and burn residue. The deposition of oil and burn residue within the field of broken ice is confined to a relatively narrow swath created by the natural containment of the surrounding ice. Wherever oil accumulations are evident at the surface, aerial ignition techniques are used to burn that oil in place. When accessible, TF-4 and TF-5 recover burn residue from aerial ignition operations.</p> <p>During the last week (prior to Day 30 and control of the blowout) efforts to burn oil in place include the monitoring and marking of oiled ice and burn residue. Using the same techniques implemented throughout the response (with tracking buoys, satellite monitoring of ice movement, etc.), the swath, speed, and direction of potentially oiled ice is documented and updated on charts. The delineation of any ice that could contain oil or unburned oily residue is used throughout the winter to ensure that overflights in the spring are directed to those locations as soon as surface melt and breakup conditions begin. The dynamic nature of the continually moving and ridging offshore ice fields make it difficult to mount any significant mid-winter on-ice recovery operations; to the extent that it is safe to land on the ice during the winter, efforts can be made to confirm the nature and extent of any oiled ice/snow, to mark and rank the severity of any oiling, and to remove or burn any oil that can be handled quickly and safely.</p> <p>Nearshore and Shoreline: TF-6, TF-7, and TF-8 are put on alert shortly after notification of the blowout. Oil surveillance and tracking efforts are used to monitor the nature and extent of oil released from the blowout, and to give advanced warning of whether, when, and where oil is projected to impact ESAs.</p> <p>Although it is unlikely, if it is determined that oil from the blowout could impact the mainland, TF-6 (OSR barge staged within 96 hr of the Chukchi Sea nearshore zone) would be mobilized and relocated to a temporary mooring about a mile off the shoreline of the projected impact zone. Trajectory modeling predicts 6 days as the earliest possible time oil could contact shorelines between Wainwright and Peard Bay, and only in the unlikely event sustained winds from the WNW occurs. Shell activates OSRO and response contractors to mobilize crews and equipment to implement shoreline protection (TF-7) and recovery operations (TF-8). TF-6, TF-7 and TF-8 arrive on scene within 96 hr.</p> <p>Shell mobilizes response personnel to be on location at their respective staging areas awaiting updates on locations and times for potential shoreline landfall by oil. TF-6 stages the OSR barge to perform nearshore free-oil recovery. TF-7 deploys to initiate priority protection booming and TF-8 positions crews and equipment for shoreline cleanup operations. Sufficient numbers of trained personnel are brought in to support 12-hr shifts until darkness and/or other conditions preclude the effectiveness or need for around-the-clock operations. Shell's response crews, as well as the nearshore OSR barge, are prepared to fulfill all "decontamination" needs for personnel, boats, and equipment.</p> <p>A secondary objective for TF-6 (OSR barge) is to provide logistical support for the shoreline protection and recovery activities of TF-7 and TF-8. The OSR barge serves as a large, shallow-draft platform that can help sustain nearshore operations by providing a safe haven for personnel, small vessels and mini-</p>	<p>OR 5A, OR-5B</p> <p>Shell OR-7</p> <p>ACS B-3</p> <p>Shell OR-7</p> <p>ACS B-3, B-6</p> <p>Shell TS-1</p> <p>ACS T-4A Shell TS-1, TS-2, TS-3</p> <p>ACS T-4, T-4A, T-5</p> <p>ACS LE-3</p> <p>Shell L-3</p> <p>ACS S-4</p> <p>Shell S-4</p> <p>Shell OR-1A, OR-1B OR-4A to OR-4D, OR-5A, OR-5B</p> <p>ACS C-13, C-14, C-15</p>

**Table C-5
Response Strategy
Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions (Continued)**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
	<p>barges; communications; deck space to store boats; equipment and supplies; refueling capabilities; decontamination facilities; and storage for recovered oil and oily debris.</p> <p>Key equipment aboard the nearshore OSR barge (TF-6) includes: two (2) Lamor LSC-5 oleophilic skimmers; one (1) 47-ft vessel with two (2) Lamor LORS-2C skimmers; three (3) 34-ft work boats; four (4) mini-barges; pedestal crane; ocean boom; and hydro-fireboom. TF-6 intercepts oil approaching the mainland. These operations remain within a few miles of shore, involve temporary storage in mini-barges, and transit to the OSR barge for lightering of recovered oil from the mini-barges.</p> <p>TF-7 consists of Shells OSRO (ACS) and response contract personnel and equipment mobilized to set deflection and exclusion booms at key locations to keep oil from entering previously identified priority protection sites. As necessary, TF-7 also utilizes the TF-6 for support, fuel, decontamination, etc. TF-7 pre-staged equipment includes: two (2) landing craft; two (2) 24-ft work boats; 10,000-ft conventional boom; 10,000-ft coastal boom (6,000-ft from TF-6 and 4,000-ft pre-staged); and 4,000-ft shore seal boom.</p> <p>TF-8 primarily operates from and along the shoreline, involves booming and skimming operations along the mainland, beach cleaning operations, and temporary storage/disposal of recovered oil and oily debris. TF-8 consists of personnel and vessels mobilized by ACS and ARS. Available equipment includes: twenty (20) oleophilic skimmers; fifty (50) 2,500 gal folding tanks; eight (8) ATVs; twelve (12) 5,000-gal folding tanks; one (1) IMO tank; and twelve (12) rope mop skimmers. As needed, ACS mobilizes four (4) Type A and B workboats and two (2) Type C workboats to support TF-7 and TF-8.</p> <p>TF-6, TF-7 and TF-8 are utilized in this late-season blowout scenario from the time oil first enters the nearshore/shoreline environment (about Day 6) until freezeup and the formation of landfast ice which then keeps oil from impacting the barrier islands and mainland. TF-8 (Shoreline Cleanup), however, continues to collect and recover oil and oily debris until such oil is no longer recognizable or recoverable on the beaches or back-water areas.</p>	<p align="center">ACS R-16, SH-2 through SH-12</p> <p align="center">Shell OR-1A, OR-1B OR-4A to OR-4D, OR-5A, OR-5B</p> <p align="center">ACS SH-2 to SR-12</p>
<p>(viii) Lightering Procedures</p>	<p>The lightering of recovered fluids from the TF-1 OSR vessel to the OST is accomplished with rotation cycles beginning after Day 1 that are completed within a 24-hr period for each full cycle. At Hour 42, TF-4 and TF-5 arrive on-scene. At Hour 48, TF-2 disengages from skimming to begin its first lightering cycle to the TF-3 OST. An alternating 24-hr cycle is established with two task forces skimming while the other two lighter their recovered oil to TF-3.</p> <p>The OST is maintained at a location 25 n mi from offshore recovery operations and 35 n mi from nearshore recovery operations. The 24-hr cycles allow sufficient time to transit to and from the OST and complete lightering operations for the task forces. The transfer of recovered fluids (after decanting forward of the skimmers) is accomplished using BAT; that is, annulus injection of water at a suction head to produce a low-friction transfer of viscous fluids between the skimmer's on-board storage and the OST. With high-volume transfer pumps and annulus injection, each transfer from the OSR vessels to the OST should require only 2 to 5 hr with an additional 3 to 4 hr factored in for set up and transit to and from the OST. Using high-volume transfer pumps, offloading requires less than the 12 hr available to complete transfer operations for each OSR vessel and transit to and from the OST.</p> <p>Nearshore: Recovered fluids from TF-6's skimming boats are actively transferred to mini-barges during the skimming operations. The 249-bbl mini-barges are lightered in approximately one hour using Lamor GTA 50 pumps to transfer viscous fluids to the Nearshore OSR barge. Other recovery operations at and on the shoreline will likely involve relatively small volumes of oil. These fluids and/or oily solids can be transferred as time and vessel- or helicopter-availability allow. Some of these recovered materials could be stored onshore, if necessary, in durable containers until they can be retrieved during the winter or following summer.</p>	<p align="center">Shell OR-3A and OR-6</p> <p align="center">Shell OR-3A</p> <p align="center">Shell OR-6</p> <p align="center">ACS D-2</p> <p align="center">Shell OR-3A, OR-6</p>

**Table C-5
Response Strategy
Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions (Continued)**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
	For planning purposes, the Nearshore OSR barge has a storage capacity of 17,000 bbl. Once TF-6 reaches fill capacity, transit to the OST and lightering require approximately 10 hr. The 10% planning volume to the nearshore zone is significantly greater than the amount of oil that would likely escape offshore operations, survive the long journey to shore, and be recovered.	ACS R-28
(ix) Transfer and Storage of Recovered Oil/Water; Volume Estimating Procedure	TF-1 OSR vessels are equipped with sensors to indicate liquid levels in its holding tanks; transfer pumps are calibrated; decanting is monitored closely and volumes of discharged water accounted for. Careful records are kept on the volumes of fluids transferred to the OST. The OST transfers are also manifested and logged with the assistance of the Waste Management Team. Storage and transfer procedures are maintained aboard the OSR barges, and accurate records are maintained involving liquid and/or solid waste transferred from the mini-barges or other small vessels involved with the nearshore/shoreline cleanup operations.	Shell DP-1, OR-3A OR-6
(x) Plans, Procedures, and Locations for Temporary Storage and Disposal	A Waste Management Plan is developed in order to: (1) fill out and sign manifests, (2) measure liquid and other waste, and (3) show procedures/documentation that meets regulatory requirements. Non-liquid oily wastes are classified and disposed of according to classification. Non-oily wastes are classified and disposed of accordingly. Recovered fluids stored on board the OSTs are disposed of outside the U.S., either at Shell Group refineries or other third-party processors. Such disposal is carried in accordance with Shell environmental policy and relevant local laws and regulations (see Appendix K).	Shell DP-1 ACS D-1, D-3, D-4
(xi) Wildlife Protection Plan	Containment and exclusion booms are deployed by ARS and ACS (NSSRT, VRTs and ACRTs) to protect priority areas. Landfast ice, if present, also provides protection, keeping oil from impacting barrier islands, sensitive waters behind those islands, and the mainland. This protection of sensitive habitats by a natural ice barrier, however, is not stable along most of the Chukchi Sea shoreline. Prevailing winds with a strong component out of the east can cause the landfast ice to break free of the shoreline and drift out to sea or toward the NE running parallel to the shoreline. Should oil pass from the offshore environment toward shore during this period, every effort will be made to work within the narrow nearshore ice free to moderate ice concentration period to limit the spread of oil and recover it as quickly as possible. Should oil be encapsulated within the landfast ice and then “break-away,” tracking buoys and satellite monitoring of the oiled ice will be used to prepare appropriate recovery/burning techniques should that oil be exposed near sensitive environments later on. Encapsulation of oil in ice reduces the potential that wildlife will be exposed to the spill. A Wildlife Protection Plan, permits, and strategies would be developed, implemented, and coordinated with the ACS to manage birds and mammals that become oiled at sea or in the nearshore/onshore environments.	ACS C-13, C-14, C-15 Shell TR-1 ACS T-4A ACS W-1 W-2A, W-2B W-5, W-6
(xii) Shoreline Cleanup Equipment	A shoreline protection and cleanup plan is developed as soon as possible reflecting the nature and amount of oil that could enter the nearshore environment. Depending upon the location and timing of that threat, a shoreline assessment is conducted to understand all potential exposures to oil. A plan, with and without the formation/presence of landfast ice, is drawn up and submitted to the UC. Depending upon the nature and amount of oil coming ashore, the least damaging response options are used to keep oil away from sensitive habitats, plants and animals, and to minimize any damage to those resources. While the distances that oil would need to travel to impact land are quite great in the Chukchi Sea and weathering of that oil would occur, the potential for controlled burning of oil and oiled debris would be given serious consideration. As long as burns are conducted at least 3 mi from any populated area, and satisfy all of	ACS SH-1 Shell SR-1 ACS SH-10

**Table C-5
 Response Strategy
 Subsea Well Worst Case Discharge Blowout in Varying Ice Conditions (Continued)**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
	<p>the constraints imposed by the UC and the <i>In Situ</i> Burning Guidelines for Alaska, it may be possible to eliminate beached oil/debris with overall minimal impact to the environment.</p> <p>During the winter months, a shoreline cleanup plan is developed and submitted to the UC in the event that oil shows up during and/or following breakup. As soon as practicable, SCATs monitor the shorelines and adjacent tundra and then establish clear objectives and procedures to minimize impacts. Priorities are established, and cleanup techniques are chosen based on shoreline type, degree of oiling, and resources at risk.</p> <p>Representative shoreline cleanup tactics include:</p> <ul style="list-style-type: none"> • Passive recovery of oil using snare boom. • Manual removal of oil and oily debris. • Deflection booming with skimming or trenching to contain and recover floating oil. • Deluge of minor to moderately oiled shoreline. • Burning or removal of oiled debris and vegetation, • Natural recovery for those areas where residual staining may remain, but further recovery would cause more harm than good. 	<p align="center">ACS SH-1, SH-2 through SH-12</p> <p align="center">Shell SR-5, SR-6, SR-7, SR-8, SR-9, SR- 10</p>

TABLE OF CONTENTS

APPENDIX D	DISPERSANT USE PLAN [30 CFR 254.27]	D-1
D.1	OVERVIEW	D-1
D.2	INVENTORY AND LOCATION OF DISPERSANT [30 CFR 254.27(a)]	D-1
D.3	PRODUCT TOXICITY DATA [30 CFR 254.27(b)]	D-2
D.4	EQUIPMENT MOBILIZATION [30 CFR 254.27(c)]	D-3
D.5	DISPERSANT APPLICATION PROCEDURES [30 CFR 254.27(d)]	D-4
D.6	POTENTIAL CONDITIONS FOR DISPERSANT APPLICATION [30 CFR 254.27(e)]	D-5
D.7	DECISION AND APPROVAL PROCESS [30 CFR 254.27(f)]	D-8
D.8	MONITORING	D-9

FIGURES

Figure D.7-1	Field Operations: Dispersants Operations Group	D-8
Figure D.8-1	Oil Spill Response Checklist: Dispersant Use	D-10

TABLES

Table D.2-1	Dispersant Inventory and Location	D-2
Table D.4-1	Dispersant Equipment and Location	D-3
Table D.5-1	Non-mechanical Response Tactics References	D-4

THIS PAGE
INTENTIONALLY
LEFT BLANK

APPENDIX D DISPERSANT USE PLAN [30 CFR 254.27]

D.1 OVERVIEW

Dispersants are chemical formulations containing surfactants that, when applied to a slick, lower the surface tension between oil and water, facilitating the formation of oil droplets under wave action and preventing them from coalescing and resurfacing, therefore enhancing oil dispersion and biodegradation into the water column. Dispersants may be strategically applied to reduce oil impacts to sensitive shoreline or to remove oil concentrations from the water surface reducing marine bird and mammal contact with oil slicks.

Dispersant use is strictly regulated and has very specific policies and procedures associated with it. Dispersant application requires approval from the FOSC. The ARRT, comprised of federal, state, and local governmental agencies, will act as an advisory board to the FOSC.

The option to apply dispersants to a spill within the Chukchi Sea will most likely be evaluated by the FOSC and UC when environmental conditions reduce the efficacy of mechanical recovery or when the spill volume and duration warrant consideration of its use.

There are several reasons to consider dispersants as a viable treatment option: Aerial application provides an increased vantage point to locate and target oil slicks for treatment; increased mobility as compared to on-water assets; and an increased oil encounter rate. Vessel-based platforms using spray arms provide the ability to apply dispersants in discrete areas and at times when aerial assets may not be available. Mixing of the dispersants into oil using the OSR vessel's propulsion system facilitates the effectiveness of oil dispersion. Dispersants also provide the ability to treat a significantly larger volume of oil than can be mechanically recovered in a similar time period. The resulting potential to mitigate sensitive resource and shoreline impacts warrants the consideration of dispersant use.

D.2 INVENTORY AND LOCATION OF DISPERSANT [30 CFR 254.27(a)]

The NCP requires that dispersants proposed for use are listed in the NCP Product schedule. Products currently stockpiled for use by industry in Alaska include COREXIT® EC9500A (9500). Shell would have 25,000 gal of 9500 available for use in Alaska, with approximately 23,700 gal available for mobilization from Anchorage and 1,300 gal pre-staged with ACS on the North Slope. Both of these products are solvent-based “concentrate” dispersants that may be applied in their undiluted (neat) or diluted form. Table D.2-1 presents a summary of current dispersant inventory and locations.

**Table D.2-1
Dispersant Inventory and Location**

SHELL DISPERSANT	LOCATION	VOLUME
9500	Anchorage, AK	23,700 gal
9500	North Slope, AK	1,300 gal
9500	Mesa AZ (MSRC C-130 Payload)	3,200 gal
9500	MSRC Inventory	http://www.msrc.org/services/oil-spill-response/equipment/MSRC_Major_Equipment_List.pdf
9500	ACS Mutual Aid Agreements (ACS Tactic L-10)	CISPRI: 13,200 gal Contact: (907) 776-5129 Inventory Location: Anchorage (11,000 gal) Nikiski (2,200 gal)
		Alyeska Pipeline Service Company: Total 72,827 gal Contact: (907) 834-6963 or (907) 461-7141 Inventory Location: Anchorage (61,882 gal) Valdez (10,975 gal)

The MSRC C-130 aircraft would be mobilized to Barrow with a full payload (3,200 gal) of 9500 dispersant. Through their contract with MSRC, Shell also has access to additional inventories of dispersants.

MSRC’s Dispersant Inventory list may be accessed at <http://www.msrc.org> in the Customer Access section. MSRC’s inventory dated March 18, 2013 identifies 103,159 gal of 9500 strategically staged throughout the country.

In order to sustain sufficient inventory of dispersant during a Tier III incident, Shell in coordination with its contracted OSROs, will call for the manufacturing of additional dispersant from Nalco Company. Nalco has indicated that it has the capability to ramp up within 10 days to begin replenishing much of the anticipated daily dispersant usage for 9500. Nalco has confirmed that a baseline average of 40,000 gal of dispersant can be produced on a daily basis once Nalco reaches full production. Nalco has the ability to produce around 50,000 gpd, but this is dependent on availability of dispersant mixture ingredients.

D.3 PRODUCT TOXICITY DATA [30 CFR 254.27(b)]

Shell has access to stockpiles containing the dispersant 9500. This product is included in the EPA’s NCP Product Schedule. 9500 was developed in the early 1990s, is effective on heavier crude, and is made of materials that are considered more environmentally friendly than previously produced dispersants. A summary of the physical properties of 9500 is provided below:

COREXIT 9500:

Specific Gravity at 60°F: 0.95
 Density at 60°F: 7.93 lb/gal
 Flash point: 176°F
 Pour point: -71°F
 Viscosity at 32°F: 177 cSt
 Viscosity at 60°F: 70 cSt
 Viscosity at 100°F: 27 cSt
 Solubility in fresh water: soluble

Toxicity information and MSDSs for 9500 are available and may be accessed online, respectively at the following websites:

- http://www.epa.gov/oem/content/ncp/tox_tables.htm
- <http://www.nalcoesllc.com/nes/employees/1617.htm>.

D.4 EQUIPMENT MOBILIZATION [30 CFR 254.27(c)]

Mobilization of resources required to implement Shell Tactics OR-8, OR-9A, and OR-9B or ACS Tactics DT-1, DT-2, or DT-3 for possible deployment will not be dependent upon FOSC or UC approval. The approval evaluation and coordination process takes time. Mobilization of the MSRC (C-130), UNIVAR (bulk storage facility for dispersant in Anchorage) and ERM (dispersant monitoring and testing contractor), will be prior to obtaining approval for dispersant use, to ensure these resources are pre-staged and readily available in Barrow when the FOSC approval is granted. These resources may be flown via charter or commercial airfreight to Barrow within 24 hours. By the end of Day 1, a complete dispersant support operation could be readily available to the UC.

Dispersant equipment and supplies are identified within Shell Tactics OR-8, OR-9A, and OR-9B and ACS Tactics DT-1, DT-2, and DT-3. Additional support for ongoing dispersant application would be made through activation of ACS's APICOM mutual aid agreements described in ACS Tactic L-10. Table D.4-1 lists dispersant equipment and locations.

**Table D.4-1
Dispersant Equipment and Location**

SHELL DISPERSANT EQUIPMENT	STAGING LOCATION	APPLICABLE TACTIC	RESPONSE TIME (hr)	
			MOB & TRANSIT	DEPLOY
Hercules Aircraft C-130 with 3,200 gal of dispersant	Mesa, AZ	Shell OR-9A	24	0.5
Helicopter / Fixed-Wing Support	Anchorage / Barrow / Deadhorse	Shell OR-9A OSRP Appendix A ACS Tactic L-4	<24	1
Spray Arms	OSR Vessel	OR-8	On Scene	0.5
Spray Bucket	Barrow	OR-9B	1	1
Supplemental Aerial Dispersant Platforms	Variable	ACS Tactic L-4 and L-10	Variable	Variable

Aerial application of dispersants would likely involve fixed-wing aircraft because helicopters have limited payload-range capabilities. Shell has access to large fixed-wing aircraft through service agreements, and additional aircraft may be mobilized as needed. As an established member of the MSRC, Shell has access to a C-130 with integrated dispersant tanks that would be staged, maintained, and mobilized out of Mesa, AZ. The C-130 would arrive in Barrow with a qualified crew and operator within 24 hr of initial notification. A spotter plane (fixed-wing) would also be provided by MSRC and travel in tandem with the C-130 to Barrow for staging and deployment. The integrated dispersant tanks on the MSRC C-130 have a 3,200 gal capacity. As a member of MSRC and ACS, Shell also has access to additional dispersant stockpiles and spotter aircraft. Reference Shell Tactics OR-9A and OR-9B for information on aerial dispersant application equipment staging, mobilization, and capacities.

Compared to aircraft delivery systems, vessels may be slower with limited transit speeds, limited swath widths, and are subject to the variability of sea state. However, vessel application systems can be of great value when conditions preclude the use of that vessel for other mechanical recovery operations. Should it become too rough to deploy booms for the recovery

and/or burning of oil, vessels might be used to apply dispersants at or near the spill site. In broken ice, dispersants could be applied and then agitated using the vessel propulsion system to enhance the dispersion process. Any application of dispersants, whether from vessels or aircraft in open water or in broken ice, would always involve a thorough assessment of the benefits and risks, and involve appropriate authorization for use. Shell plans to include an OSR vessel in the Chukchi Sea with a conventional spray-arm application system. This application system provides flexibility of use under a broad range of operational and environmental conditions. Reference Shell Tactic OR-8.

D.5 DISPERSANT APPLICATION PROCEDURES [30 CFR 254.27(d)]

Upon approval, incident-specific conditions associated with the approval shall be met. Both alternative response techniques (aircraft and vessel) shall require a test to determine if its use is feasible given environmental and oil conditions. If the event warrants the consideration of alternative measures, assets will be immediately mobilized to support operations. The efficient use of both techniques decreases as the oil weathers, presenting a relatively narrow window of opportunity for its use. In addition, dissipation of a dispersed oil plume into deeper waters (more than 30 ft [10 m]) is preferable and relies upon timely deployment of an application platform. On-site assets shall be deployed upon approval by the UC.

Initiation of dispersant application will normally involve the following steps:

1. Prior to UC approval, dispersant support contractors and other resources are mobilized to Barrow for immediate availability.
2. Ready vessel-mounted dispersant equipment.
3. Within the IC, integrate planning, logistics, and operations functions to provide necessary support to air and sea dispersant application platforms.
4. UC will provide a Dispersant Use Plan utilizing Figure D.7-1 and ensure ongoing monitoring of the dispersant effectiveness using SMART protocols.
5. The IC will monitor the efficiency and effectiveness reports of missions to provide a basis for the UC to determine if dispersant use will continue.

Procedures and methods for implementation of the Dispersant Use Plan are described in detail within the Shell Tactics Manual and ACS Technical Manual and include, but are not limited to, tactics listed in Table D.5-1.

**Table D.5-1
Non-mechanical Response Tactics References**

NON-MECHANICAL RESPONSE CATEGORY	MANUAL	TACTIC ID	TACTIC
Dispersant Use	ACS	DT-1	Dispersant Application Via Vessel
		DT-2	Dispersant Application Via Aircraft
		DT-3	Dispersant Application Via Helicopter
	Shell	OR-8	Dispersant Spray from OSR Vessel Outriggers
		OR-9A	Aerial Dispersant Application (HERC with ADDS-Pack)
		OR-9B	Aerial Dispersant Application (Helicopter Spray Bucket)

D.6 POTENTIAL CONDITIONS FOR DISPERSANT APPLICATION [30 CFR 254.27(e)]

Shell has incorporated the flexibility to implement multiple strategies and tactics into their response preparedness and planning. Mechanical recovery and removal of oil from the environment is the primary method of response that Shell intends to employ for OSR. Use of dispersants will be considered as options to augment mechanical response methods. Dispersant would be used with the consent of the FOSC or UC to augment mechanical response.

While the primary response method to be employed by Shell in the Chukchi Sea is mechanical recovery, Shell also recognizes the limitations of mechanical response equipment in various sea states and environmental conditions as well as the need for strategic flexibility to maximize oil spill response in the Chukchi Sea. The capability of applying dispersants extends response operations beyond the limitations of mechanical equipment or the slick-threatened sensitive resources, coastal areas and state waters. The decision to use dispersants is dependent upon several factors including: the effectiveness of mechanical response; whether dispersant application strategies can be employed to augment, and not impede, mechanical recovery; and whether environmental conditions are conducive for dispersant use.

Dispersant application will be considered as a secondary response technique. Alternate, non-mechanical response options may be employed to augment mechanical recovery strategies or to supplement them if conditions make mechanical recovery ineffective. Additionally, the response options may be employed if their use is deemed to be more environmentally beneficial than if their use is withheld. Note that the equipment necessary to conduct initial non-mechanical response missions is already made available by Shell and exists on the OSR vessels described in Appendix A. Shell's OSR vessel is equipped with dispersant application spray arms system. The cascading of additional non-mechanical resources, from outside the immediate region, is well established.

A critical window of opportunity exists in which dispersant is best used. Generally, dispersants are most effective on fresh crude oil as the dispersant reacts with the more volatile hydrocarbons. Over time, spilled oil in the marine environment will weather, losing volatile hydrocarbons and forming water-in-oil emulsion. For the Chukchi Sea well blowout scenario, the use of dispersants may be considered daily until several days after well control is achieved.

Effective dispersion of oil is affected by multiple factors including:

- oil properties;
- oil weathering or emulsification;
- sea state or mixing energy;
- oil and water temperature;
- seawater salinity;
- type of dispersant; and
- application systems and strategies.

Shell recognizes that when proposing the use of dispersants on spills from exploration operations there may be critical unknowns (e.g., oil properties and whether the oil is chemically dispersible). When proposing the use of dispersants in open water, the following should be considered.

- The oil properties will be unknown until Shell's exploration operations are complete. SMART protocols also recommend a field test application for any proposed treatment of spilled oil with dispersants. Because the oil properties in this prospect are currently unknown, there is an expectation that an on-site test for dispersant use in the Chukchi Sea would be a UC condition of approval. On-site dispersability tests can be conducted by subjecting 20 drops of an on-site collected oil sample to one drop of dispersant chemical. This will provide an initial dispersability determination (i.e., it is either dispersible or not) by visual observation. However, caution should be used due to the large droplet size, as this test will only provide a gross visual estimate and may not be indicative of the improved efficiency gained by proper dispersant application. A more comprehensive chemical analysis of a down-hole recovered oil sample could be performed after the first exploratory well drilling (presuming drilling success), and results could be available for the initial well within several days after processing at a shore-based laboratory.
- Wind waves [greater than 3 to 4 ft (0.9 to 1.2 m)] (Beaufort Scale 4) reduce or impede the containment of oil with booms. Dispersant effectiveness requires some wave energy (or deliberate mixing) and is not normally applied to oil on calm waters. Having the option of using dispersants as a response strategy could extend response operations beyond mechanical recovery and *in situ* burning possibilities. Dispersants can be applied effectively with only light wind chop (Beaufort Scale 1); however, dispersants are much more effective with breaking waves as seas approach a Beaufort Scale 3. The upper limit for dispersant use is typically around Beaufort Scale 6 to 7 (waves at 10 to 14 ft [3.0 to 4.3 m]); however, the limitation is not because of wave conditions, but because of the effects of strong winds on droplet size and distribution. Natural dispersion under these conditions will also play a major role in removing oil from the surface.
- As required by Subpart J of the NCP, the dispersant proposed and available for use in Alaska (9500) is on the NCP Product Schedule and approved for use by EPA. Tests have shown that 9500 is an effective dispersant on Alaskan oils in cold water (S.L. Ross 2003). Additionally, information on dispersed oil toxicity and biodegradability by Arctic species is incorporated by reference in Appendix L (Bibliography) (see Gardner et al. 2011 and Perkins et al. 2011).
- As water temperature decreases, oil viscosity increases. Dispersants are most effective for oil viscosities less than 2,000 cSt and almost no dispersion occurs for viscosities exceeding 10,000 cSt. A general rule of thumb is that all crude oils are initially amenable to dispersion except those crude oils with high initial viscosities or that would be solid at seawater temperatures. If the water temperature is below the pour point of the oil, dispersant will simply roll off of the oil layer (NRC 1989). Seawater freezes at around 28°F (-2°C). Water temperatures in the Chukchi Sea appear to be undergoing a warming trend (MMS 2007).
- Salinity in the Chukchi Sea ranges between 31 and 35 ppt (see <http://www.ims.uaf.edu/chukchi/#seas>). Values below this range are not expected offshore in the sale lease area. Increased salinity generally decreases the solubility of dispersants in the water enhancing oil/dispersant interaction (Chandrasekar et al. 2006).
- Oil slick thicknesses should be about .004 inches (0.1 mm) or greater for the effective use of dispersants. Oil at thickness of .004 inches (0.1 mm) would require a dosage of about 5 gal of dispersant per acre for a commonly accepted DOR ratio of 1:20.

- Although near shore (<33 ft [10 m] water depth) dispersant application may in some cases be considered to protect sensitive resources, operations in the Chukchi will more likely be offshore, near the lease sale area (approximately 60 n mi or more). Consistent with the guidelines established in the Unified Plan, the optimal water depth to disperse oil is ≥ 33 ft (10 m). The water depths in the lease area range from 98 ft to 9,843 ft (30 m to 3,000 m).
- Results of studies indicate that chemically dispersed oil does not adhere to some organisms or habitats to the extent of untreated oil (NRC 1989).
- The encounter rate to treat a spill using aerial and on-water application platforms is significantly higher than on-water recovery operations.
- A standard DOR application rate of 1 to 20 would be used; however, this may be modified based upon incident specific needs and UC approval. Multiple passes or applications may also provide an added level of control. The MSRC C-130 dispersant system may deliver up to four payloads, depending upon the actual transit distance from the Barrow staging area to the spill location, over a 12- to 18-hr period. With a DOR of 1:20, one payload results in treatment of approximately 1,500 bbl of oil.

The use of dispersants in broken ice also presents challenges, but certain broken ice conditions may present the potential for improved efficiency. When proposing the use of dispersants in broken ice conditions, the following should be considered.

- Low air and water temperatures often result in greater oil equilibrium thicknesses, thereby reducing spreading rates and areas of coverage. These reductions limit the potential for impact with natural resources while providing the potential for much higher oil encounter rates for dispersant application. For maximum effectiveness, dispersant should be applied “neat” or undiluted. For dispersant use in the Chukchi Sea, Shell has chosen undiluted 9500.
- Evaporation rates are reduced, leaving the lighter and more volatile components in the oil longer, thereby extending the time in which the oil could be dispersed.
- The presence of ice can dampen wave action and limit the fetch over which winds might otherwise create large waves. While this would enhance burning opportunities, oil is more readily dispersed with induced agitation and/or wave energy. Tests have shown that moving broken ice can actually stimulate dispersant action. Dispersant efficiencies increase with the amount of mixing energy even more so than with increases in salinity (Chandrasekar et al. 2006). The OSR vessel propulsion system may be used to create surface turbulence, thereby enhancing mixing energy for dispersants in areas where wave action is diminished by the presence of ice.
- Sea-ice formation results in increased salinity. Brine rejection during sea-ice growth strongly affects salinity of upper ocean water. This may result in improved oil dispersion as tests have shown an increase in the dispersability of some oils with an increase in salinity (Chandrasekar et al. 2006). The salinity of seawater normally ranges between 32 and 35 ppt.
- Emulsion formation may be slowed dramatically by high ice concentrations. Fresh unemulsified crude is more efficiently dispersed.

D.7 DECISION AND APPROVAL PROCESS [30 CFR 254.27(f)]

Request for approval of the use of non-mechanical response methods will be made to the UC. The ARRT, comprised of federal, state, and local governmental agencies, will act as an advisory board to the FOSC.


The need for the use of non-mechanical response methods to augment mechanical recovery is determined and approved by the FOSCs and SOSCs within the UC. Input and considerations from local stakeholders and regulatory authorities shall be vetted through the On-Scene Coordinators and IC.

For dispersant use, the request for approval will be made consistent with the guidance procedures outlined in Annex F “Chemical Countermeasures: Dispersants, Chemical Agents, and Other Spill Mitigating Substances, Devices or Technology” of the Unified Plan. The ARRT Oil Dispersant Authorization Plan was under revision in 2013. During an incident, the most current version would be accessed via the ARRT website: www.alaskaarrt.org.

Use of dispersants in “undesigned zones” within federal waters is under the command of the USCG as the FOSC. Consistent with the Unified Plan Annex F guidance, Shell will follow the undesignated zone request for approval procedures. Although the FOSC has final authority within OCS waters, the request for approval will be made through the UC. Prior to the use of dispersants in state waters, approval would be requested from the ADEC, acting as the SOSC.

Figure D.7-1 provides an example of the Field Operations organization Shell may use when dispersant is considered as a viable response strategy. Figure D.8-1 shows the Oil Spill Response Checklist: Dispersant Use, from the Unified Plan, Annex F (Change 2).

Figure D.7-1 Field Operations: Dispersants Operations Group

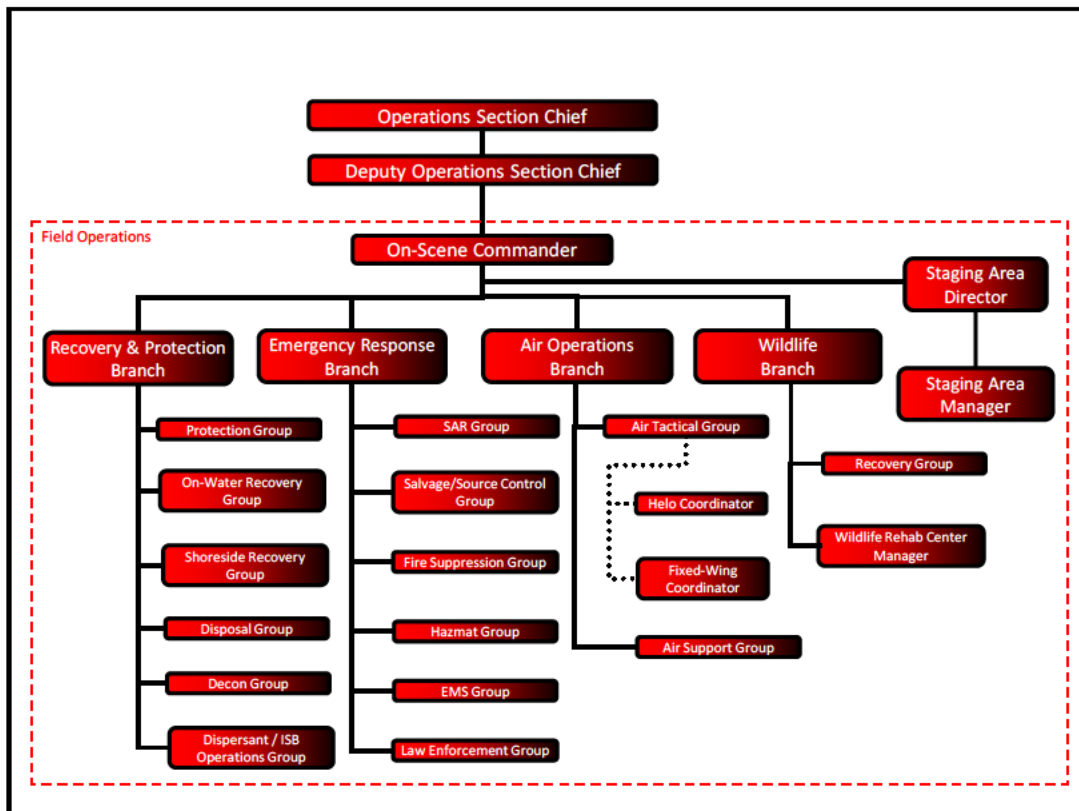

D.8 MONITORING

The oil properties will be unknown until Shell's exploration operations are complete. SMART protocols also recommend a field test application for any proposed treatment of spilled oil with dispersants. Because the oil properties in this prospect are currently unknown, there is an expectation that an on-site test for dispersant use in the Chukchi would be a UC condition of approval. On-site dispersability tests can be conducted by subjecting 20 drops of an on-site collected oil sample to one drop of dispersant chemical. This will provide an initial dispersability determination (i.e., it is either dispersible or not) by visual observation. However, caution should be used, due to the large droplet size, as this test will only provide a gross visual estimate and may not be indicative of the improved efficiency gained by proper dispersant application. A more comprehensive chemical analysis of a down-hole recovered oil sample could be performed after the first exploratory well drilling (presuming drilling success), and results could be available for the initial well within several days after processing at a shore-based laboratory.

When dispersants are considered for use as a response option, the UC may require that monitoring of the dispersed oil is performed consistent with one of the three tiers defined within NOAA's dispersant use SMART protocol. Accepted by the response community as a standardized approach to monitoring dispersant applications, the protocol tiers provide escalating levels of monitoring effort. The UC approves the monitoring requirements appropriate for the response and the incident-specific environmental conditions.

Shell would mobilize aerial and on-water monitoring contractors through their response contractor ARS. Tier I SMART protocols would be implemented for approved dispersant application. Subject to UC and ARRT approvals for dispersant use, implementation of Tier II or Tier III SMART protocols provide for real-time fluorometry data collection, supplemented with water sample collection for later chemical analyses. The fluorometry readings provide data on the dispersant efficacy and the dispersed oil plume. Tier III also provides for the collection of data on physical parameters such as water temperature, conductivity, and turbidity that, when correlated with Tier I visual observations and Tier II / Tier III fluorometry readings, may be used to evaluate dispersant efficacy. Current drogues or buoys also may be deployed to track the dispersed oil plume.

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

Figure D.8-1 Oil Spill Response Checklist: Dispersant Use

TAB D: OIL SPILL RESPONSE CHECKLIST: DISPERSANT USE IN ZONES 2 AND 3 AND IN UNDESIGNATED AREAS

I. SPILL DATA (TO BE COMPLETED BY RESPONDING PARTY AND SUBMITTED TO FEDERAL ON-SCENE COORDINATOR)

- A. Name of incident: _____
- B. Date and time of incident: Month/Day/Year _____; Time _____
- C. Incident: Grounding ___ Transfer Operations ___ Explosion ___
Collision ___ Blowout ___ Other _____
- D. Did source burn? Yes ___ No ___
Is source still burning? Yes ___ No ___
- E. Spill location: Latitude _____; Longitude _____
- F. Distance (in miles) and direction to nearest land: _____;
nearest town _____
- G. Product released: North Slope Crude ___ Cook Inlet Crude ___
Chevron Residual ___ Diesel #2 ___ JP4 ___ Other: _____
- H. Product easily emulsified? Yes ___ No ___
- I. Product already emulsified? No ___ Light emulsion (0-20%) ___
Moderate emulsion (21-50%) ___ Heavy emulsion (>51%) ___ Unknown ___
- J. Estimated volume of released product: _____ gals ___ bbls ___
- K. Estimated volume of product potentially released: _____ gals ___ bbls ___
- L. Release status: Continuous ___ Intermittent ___
One time only, now stopped ___
If continuous or intermittent, specify rate of release: _____ gals ___ bbls ___
- M. Estimated water surface covered (square miles): _____

DISP -26

Figure D.8-1 Oil Spill Response Checklist: Dispersant Use (Continued)

II. WEATHER AND WATER CONDITIONS AT THE TIME AND LOCATION OF SPILL (TO BE COMPLETED BY RESPONDING PARTY AND SUBMITTED TO FEDERAL ON-SCENE COORDINATOR)

- A. Temperature: Air _____ °F Water _____ °F
- B. Weather: Clear _____ Partly Cloudy _____ Overcast _____ Rain _____ Snow _____ Fog _____
- C. Tidal State: Slack tide _____ Incoming (flood) _____ Outgoing (ebb) _____
- D. Dominant current, net drift: Speed _____ knots Direction (from) _____
- E. Wind Speed: _____ knots Direction (from): _____
- F. Sea state: Calm _____ Choppy _____ Swell _____ Waves: <1ft _____ 1-3ft _____ >3ft _____
- G. Water depth (fathoms _____ feet _____): 0-3 _____ 4-10 _____ 11-30 _____ 31-99 _____ >100 _____
- H. Ice Present: Yes _____ No _____; Percent coverage: <10% _____ 11-30% _____ 31-50% _____
51-100% _____
- I. Other considerations: Low visibility _____ Rip tides _____ Whirlpools _____ Eddies _____
Other _____

NOTE: (1) SEE SECTION IV FOR WEATHER AND WATER CONDITIONS FORECAST (TO BE COMPLETED BY NOAA SCIENTIFIC SUPPORT COORDINATOR).

(2) SEE SECTION V FOR PREDICTED OIL BEHAVIOR (TO BE COMPLETED BY NOAA SCIENTIFIC SUPPORT COORDINATOR).

(3) RESPONDING PARTY HAS OPTION OF ALSO SUBMITTING INFORMATION ON PREDICTED OIL BEHAVIOR TO FEDERAL ON-SCENE COORDINATOR.

III. PROPOSED DISPERSANT USE PLAN (TO BE COMPLETED BY RESPONDING PARTY AND SUBMITTED TO FEDERAL ON-SCENE COORDINATOR)

- A. Reason(s) for requesting dispersant use:
- B. Dispersant zone where dispersant would be applied (check one or more):
Zone 1 _____ Zone 2 _____ Zone 3 _____
- C. Location of area to be treated relative to the following, as shown on attached chart:

Slick/Trajectory
Dispersant zone
Nearest land
- D. Name of dispersant proposed for use:

COREXIT 9500 _____ COREXIT 9527 _____ COREXIT 550 _____ OFC C-609 _____ Other _____

DISP -27

Figure D.8-1 Oil Spill Response Checklist: Dispersant Use (Continued)

E. Application platform(s): Hercules C-130__ Helicopter__ Vessel

Safety plan for applicable platform in place Yes__ No

F. Dispersant dosage goals:

Ratio of dispersant-to-oil: 1:20__ Other

Gallons per acre: 5 gals per acre__ Other

G. Total amount of dispersant to be used: _____gals

H. Time of dispersant application: Start time _____ Day _____;

Finish time _____ Day

I. Estimated percentage of spill area to be treated:

1-5%__ 6-20%__ 21-40%__ 41-70%__ 71-99%__ 100%

Signature of Requestor: _____

Printed Name of Requestor: _____

Title of Requestor: _____

Requestor Affiliation: _____

Requestor Representing: _____

Time and Date Request Submitted to Federal On-Scene Coordinator: _____

IV. WEATHER AND WATER CONDITION FORECAST FROM TIME OF SPILL. (TO BE COMPLETED BY NOAA SCIENTIFIC SUPPORT COORDINATOR)

A. Wind Speed (knots):

24-hour projection: _____

48-hour projection: _____

B. Wind Direction (from):

24-hour projection: _____

48-hour projection: _____

C. Sea conditions:

24-hour projection:

Calm__ Choppy__ Waves <1ft__ Waves 1-3 ft__ Waves >3ft__

DISP -28

Figure D.8-1 Oil Spill Response Checklist: Dispersant Use (Continued)

48-hour projection:

Calm ___ Choppy ___ Waves <1ft ___ Waves 1-3 ft ___ Waves >3ft ___

D. Tidal information for three tidal cycles (see attached graph).

E. Dominant current (net drift):

Speed: _____ knots Direction (from): _____

V. PREDICTED OIL BEHAVIOR (TO BE COMPLETED BY NOAA SCIENTIFIC SUPPORT COORDINATOR)

Untreated oil forecast:

Estimated trajectory (see attached graph): _____

Expected area(s) and time(s) of land fall: _____

Estimated percent naturally dispersed and evaporated within first 24 hours: _____

VI. RESOURCES AT RISK (TO BE COMPLETED BY RESOURCE AGENCIES)

A. Habitats (see attached charts):

___ Sheltered tidal flats

___ Coastal marshes

___ Other

B. Biological Resources (see attached charts):

Fish:

Pelagic & Larval _____

Bottomfish: _____

Intertidal mollusks: _____

Crustacea: _____

C. Human Resources:

Commercial facilities and enterprises _____ (see attached chart)

Public facilities and enterprises _____ (see attached chart)

Figure D.8-1 Oil Spill Response Checklist: Dispersant Use (Continued)

Taxon	Distribution		Estimated Numbers of Individuals				
	General	Concentrated	1-10	11-50	51-100	101-1000	>1000
Endangered/Threatened Species							
1.							
2.							
3.							
Non-Endangered/Threatened Species							
Sea otters							
Fur seals							
Other seals							
Toothed whales							
Baleen whales							
Polar bears							
Walrus							
Waterfowl							
Waterfowl							
Seabirds							
Seabirds							
Diving birds							
Diving birds							
Shorebirds							
Shorebirds							
Raptors							
Raptors							
Ungulates							
Ungulates							
Bears (Brown & Black)							
Bears (Brown & Black)							
Furbearers							
Furbearers							

Figure D.8-1 Oil Spill Response Checklist: Dispersant Use (Continued)

Historic and archaeological resources:

Present ____ (Appropriate information to be provided to FOSC)

Not present ____

Unknown ____

Commercial harvest areas:

Generally distributed ____

Concentrated ____ (see attached chart)

Subsistence harvest areas:

Generally distributed ____

Concentrated ____ (see attached chart)

VII. FEDERAL ON-SCENE COORDINATOR'S EVALUATION OF RESPONSE OPTIONS (TO BE COMPLETED BY FEDERAL ON-SCENE COORDINATOR)

- A. Has mechanical clean-up been fully evaluated? Yes ____ No ____
- B. Has in-situ burning been fully evaluated? Yes ____ No ____
- C. Why is dispersant use necessary? _____
- D. Will dispersants be used in addition to mechanical recovery and/or in-situ burning?
Yes ____ No ____
- E. Will dispersants be used instead of mechanical recovery and/or in-situ burning?
Yes ____ No ____

VIII. ALASKA REGIONAL RESPONSE TEAM RECOMMENDATION TO FEDERAL ON-SCENE COORDINATOR REGARDING DISPERSANT USE (TO BE COMPLETED BY ALASKA REGIONAL RESPONSE TEAM CO-CHAIRMAN)

Time and Date Request Received by Alaska Regional Response Team Co-Chairman: _____

- A. ____ No dispersants may be applied.
- B. ____ Dispersants may be used under noted conditions (if any) in limited or selected areas (see attached chart).
- C. ____ Dispersants may be applied as requested above in Section III.*

*Requests exceeding 20 gallons per acre require Alaska Regional Response Team approval

Figure D.8-1 Oil Spill Response Checklist: Dispersant Use (Continued)

Signature of Alaska Regional Response Team Co-Chairman: _____

Printed Name of Alaska Regional Response Team Co-Chairman: _____

Time and Date of Recommendation: _____

IX. FEDERAL ON-SCENE COORDINATOR'S DECISION REGARDING DISPERSANT USE (TO BE COMPLETED BY FEDERAL ON-SCENE COORDINATOR)

Time and Date Request Received by Federal On-Scene Coordinator: _____

- A. ___ No dispersants may be applied.
- B. ___ Dispersants may be used under noted conditions (if any) in limited or selected areas (see attached chart).
- C. ___ Dispersants may be applied as requested above in Section III.

Signature of Federal On-Scene Coordinator: _____

Printed Name of Federal On-Scene Coordinator: _____

Time and Date of Decision: _____

[ARRT Approved on 4/15/92]

THIS PAGE
INTENTIONALLY
LEFT BLANK

TABLE OF CONTENTS

APPENDIX E	<i>IN SITU</i> BURNING PLAN [30 CFR 254.28]	E-1
E.1	<i>IN SITU</i> BURNING EQUIPMENT	E-1
E.2	<i>IN SITU</i> BURNING PROCEDURES	E-2
E.3	ENVIRONMENTAL EFFECTS OF <i>IN SITU</i> BURNING	E-3
E.4	GUIDELINES FOR WELL CONTROL AND SAFETY OF PERSONNEL AND PROPERTY	E-6
E.5	CONDITIONS FOR USE	E-6
E.6	DECISION PROCESSES	E-9
E.7	APPROVAL PROCEDURES AND FORMS	E-10

FIGURES

Figure E-1	Application and Burn Plan	E-11
------------	---------------------------	------

TABLES

Table E-1	<i>In Situ</i> Burning Equipment	E-1
Table E-2	<i>In Situ</i> Burning Example TFs	E-2
Table E-3	<i>In Situ</i> Burning Tactics Reference	E-3
Table E-4	Safe Working Distances from the Fire	E-6
Table E-5	Minimum Ignitable Oil Thickness on Water	E-7
Table E-6	Burn Removal Rates for Large Fires on Water	E-7
Table E-7	Fire Extinguishing Slick Thickness	E-8

THIS PAGE
INTENTIONALLY
LEFT BLANK

APPENDIX E *IN SITU* BURNING PLAN [30 CFR 254.28]

Shell has incorporated the flexibility to implement multiple strategies and tactics into their response preparedness and planning. Mechanical recovery and removal of oil from the environment is the primary method of response that Shell intends to employ for OSR. Use of *in situ* burning will be considered as an option to augment mechanical response methods. *In situ* burning would be used with the consent of the FOSC or UC to augment mechanical response.

E.1 *IN SITU* BURNING EQUIPMENT

Operational Preparedness

Shell and its contractors maintain a comprehensive inventory of equipment to initiate and sustain burning operations throughout the proposed drilling season. The Shell Tactics Manual and ACS Technical Manual contain specific tactical guidelines for offshore operations with and without ice. Many of these tactics (e.g., Shell Tactics OR-1B, OR-2B and OR-4B and ACS Tactic R-20) illustrate ways to intercept oil with an open-apex U-boom configuration so that thin or scattered oil slicks can be concentrated for recovery or captured downstream of the open-apex for burning within a fire boom.

Some of the tactics within each manual are specific with guidelines for implementing and sustaining burning on open water and in the presence of ice (e.g., Shell Tactic OR-7 and ACS Tactics B-3, B-4, B-5, B-6 and B-7). These tactics are incorporated in this OSRP by reference, along with shoreline concepts for burning nearshore in Appendix C (WCD Scenario) and Section 2.7.4. Table E-1 summarizes the Shell and ACS inventory of specialized major response equipment to support a large-scale *in situ* burn operation.

ACS conducts *in situ* burning training and competencies several times a year at different North Slope locations. Typical courses involve at least an hour of classroom instruction and an hour of field exercises involving basic combustion theory, guidelines for safe operating procedures, and gelled fuel mixing and heli-torch deployment. This training is in addition to other required training (Appendix F). ACS personnel practice the techniques involved with controlled burning operations at sea that could involve several vessels and aircraft working in close proximity.

Table E-1
***In Situ* Burning Equipment**

EQUIPMENT	QUANTITY	AVAILABILITY	LOCATION	OWNER
HydoFire Boom (500 ft [152 m] per system)	2	Immediate	<i>Nanuq/Endeavor</i>	Shell
Cooling Water Pumps and Hoses	2	Immediate	<i>Nanuq/Endeavor</i>	Shell
Fire Boom [50-, 76- and 102-cm (20-, 30- and 40-inch) skirts]	5,353 m (17,564 ft)	Immediate	Deadhorse (Prudhoe Bay)	ACS
Heli-torch (55 gal)	6	Immediate	Deadhorse	ACS
Heli-torch (300 gal)	2	Immediate	Deadhorse	ACS
Heli-torch SureFire gel	544 kg (1,200 lbs)	Immediate	Deadhorse	ACS
Air-Deployable Igniters	> 1,400	Immediate	Deadhorse	ACS
Heli-torch Batch Mixers (gelled fuel)	2	Immediate	Deadhorse	ACS

In addition, Shell and ACS maintain all appropriate logistical support for controlled burning, including boom-tending vessels, helicopters and vessels to transport and deploy equipment and ignition systems, and fire extinguishers.

Table E-2 presents example TFs assigned to implement tactics identified in Table E-3. Shell's primary response objective is mechanical removal of oil from the environment. In the event environmental conditions result in the reduced mechanical equipment efficiencies, alternative countermeasures could be used to augment the response. Shell may reassign existing TF to implement *in situ* burning tactics. Pre-staged equipment may be readily deployed from on-site TFs to augment or extend recovery operations beyond the limits of mechanical recovery. Deployment times, as well as limitations and considerations, to implement these tactics are provided in the referenced Tactics.

Table E-2
***In Situ* Burning Example TFs**

TASK FORCE	EQUIPMENT DESCRIPTION	QUANTITY	OWNER	TACTIC REFERENCE
TF-1	OSR Vessel (300-ft)	1	Shell Charter	ACS Tactic B-4, B-6, and B-7
	34-ft Work Boat (Shared with TF-2, 4, & 5)	3		
	Fire Boom System (<i>In Situ</i> Burning Containment)	500 ft		
	Dispersant Application Systems (Spray Arms)	2		
	Transrec 150 Umbilical Weir Skimmer	1		
TF-6	OSR Barge	1	Shell Charter	ACS Tactic B-4, B-6, and B-7
	Support Tug for OSR Barge	1		
	34-ft Workboats (Boom Deployment / Towing)	3		
	47-ft Response Vessel (Transport / Boom Deployment)	1		
	Fire Boom Systems (<i>In Situ</i> Burning Containment)	500 ft		
TF-B	Helicopter	1	ACS	Shell Tactic OR-7
	Heli-torch (alternative hand ignitors)	1		
	Batch Mixer	1		
	Surefire Gel and Fuel	>20 pounds		

As described in Appendix A and Appendix G, Shell has access to trained personnel and equipment to implement TF-B through its membership with ACS. Transit times for helicopters are described in Appendix G.

E.2 *IN SITU* BURNING PROCEDURES

Regulatory approval must first be obtained before using *in situ* burning, depending on whether the burn operations will be conducted in federal or state waters. The "*In Situ* Burning Guidelines for Alaska" (ADEC, EPA, and USCG August 2008) Application for *in situ* burning would be submitted to the UC. An incident-specific burn plan would be contained within the application.

If the Shell IC or the UC decides to use *in situ* burning and obtains the necessary authorization, ACS will carry out the response (see Shell Tactic OR-7 and ACS B-1 through B-7), as summarized below:

- Use towed open-apex boom configuration(s) as necessary to collect and concentrate and release oil directly into fire-resistant booms. Conventional boom may be used for this operation.
- Collect and contain the oil using fire-resistant booms. Relocate the contained oil a safe distance from the open-apex configuration and other vessels.
- In light ice cover (with ice-deflection/management support), collect and contain oil using fire-resistant booms.
- In higher ice concentrations, locate naturally occurring pools of thick oil.
- As appropriate, use fire monitors and/or wash propulsion to gently direct oil into heavier concentrations against ice floes or densely packed ice cakes. Wind may naturally provide such desired herding of oil.
- Ignite the oil using the heli-torch or hand-held igniters, following established safety procedures to avoid flashback or ignition of any ongoing spill source.
- Monitor the burn using SMART, maintain constant watch on the fire and smoke plume, condition of containment boom, speed and position of boom-towing vessel, and other safety hazards and issues as appropriate.
- To the extent possible, recover and dispose of the burn residue.

Additional information on the use of non-mechanical response techniques are detailed within the Shell Tactics OR-7, OR-8, OR-9A, and OR-9B.

Procedures and methods for implementation of the *In Situ* Burning Plan are described in detail within the Shell Tactics Manual and ACS Technical Manual and include, but are not limited to, methods described in Table E-3.

Table E-3
***In Situ* Burning Tactics Reference**

RESPONSE CATEGORY	MANUAL	TACTIC ID	TACTIC
<i>In Situ</i> Burning	ACS	B-1	<i>In Situ</i> Burning Plan
		B-1A	<i>In Situ</i> Burn Plan and Application Form
		B-2	Burning Oily Vegetation
		B-3	<i>In Situ</i> Burning with Heli-Torch and Other Igniters
		B-4	Deployment and Use of Fire Containment Boom
		B-5	Burning Oil Pools on Any Solid Surface
		B-6	Burn Residue Recovery
	B-7	Burn Extinguishment on Water	
	Shell	OR-7	Fire Boom / Heli-Torch

E.3 ENVIRONMENTAL EFFECTS OF *IN SITU* BURNING

Strategies to recover, burn, or disperse oil offshore prior to the spill reaching State of Alaska lands and waters would be of the highest priority when responding to a spill in the Chukchi Sea.

If used, non-mechanical response operations, including *in situ* burning and dispersant use, would be conducted far from Alaska's shorelines (Shell's leases are 60 n mi or more offshore) as a component of the overall tactical plan to protect ESAs and areas of public concern. The UC in consultation with natural resource agencies will require appropriate measures be implemented to protect ESAs, areas of public concern, and the public from adverse effects when authorizing these response operations. The Unified Plan and UC process of approving *in situ* burning requires coordination with resource trustees as members of the ARRT. These procedures ensure that sensitive environments, critical habitat, and threatened or endangered species receive priority for mitigating impact of spilled oil and planning response operations, which includes *in situ* burning. Continuous on-site monitoring required by the UC provides the IMT with information to immediately suspend or modify operations, precluding adverse impacts to resources or the public.

Consistent with the guidance within the Unified Plan, residue from burning operations would be recovered where practicable using manual collection methods to retrieve the residue within fire booms or from secondary booms (see ACS Tactic B-6). Burn operations would be conducted in OCS waters far offshore and closely monitored for wildlife in the area. Trustee agencies would be consulted for recommendations or necessary approvals to protect wildlife from the potentially negative consequences of burn operations and any unrecovered residues.

Shell is taking a number of steps to safeguard the area for *in situ* burning consistent with the *In Situ* Burning Guidelines. *In situ* burning would be conducted only under authorization of the UC, in consultation with the ARRT, during emergency situations where *in situ* burning of oil augments mechanical recovery operations, burning is feasible, and the burn would be a safe distance from populated areas.

The source location of a spill associated with Shell's exploration activities would be at a great distance from shore (more than 60 n mi), which far exceeds the minimum safe distance (>1 mile) to protect populated areas from the use of *in situ* burning. At this distance from population centers, Shell will perform continuous visual monitoring of the burn and resulting smoke plume. At any time during an authorized burn where there is potential for impacting a populated area, Shell will activate resources to implement air quality monitoring consistent with NOAA's SMART protocols. As detailed in the *In Situ* Burning Guidelines, the UC would consult and coordinate with resource trustee agencies anytime threatened or endangered species or their critical habitats are, or could be, present in the area of the burn. These agencies would provide recommendations to mitigate impacts of the resource from burn operation or possible oil spill impacts.

Although the burn residue itself is low volume (typically less than 2 to 3 percent) and low toxicity; batch samples of the floating residue would be analyzed to confirm composition and toxicity. Every effort would be made to recover burn residue as time and conditions allow.

One of the most important factors that influence response activities is the movement and amount of ice. Ice can pose a significant challenge for spill response; however, experience has shown that low temperatures and ice can often enhance spill response and reduce environmental impacts. For example:

- Low air and water temperatures often result in greater oil equilibrium thicknesses, thereby reducing spreading rates and areas of coverage. These reductions greatly reduce the potential for impact on natural resources while providing the potential for much higher oil encounter rates for mechanical recovery and burning operations.

- Evaporation rates are reduced, leaving the lighter and more volatile components in the oil longer, thereby enhancing the ease with which the oil could be ignited.
- Ice may actually dampen wave action and limit the fetch over which winds might otherwise create large waves.
- While ice, even in low concentrations, can preclude the effective use of oil containment boom, responders may still operate with short boom extensions and skimmers to maneuver among ice pieces and intercept oil.
- When ice concentrations preclude the use of any boom, the ice will often serve as a natural barrier to the spread of oil and help concentrate the oil for pocket-recovery operations with stationary skimmers. The natural containment of oil against ice will often result in thicknesses that could significantly enhance the efficient removal of oil by burning.
- When high ice concentrations (very close pack) and/or continuous stable ice conditions prevail, any spilled oil (especially from a subsea blowout) will likely become immobilized and encapsulated within the ice and therefore isolated from any contact with airborne or waterborne resources.
- Oil encapsulated within the ice will be preserved physically and chemically so that its unweathered state upon release (deliberately exposed, or naturally released during breakup) will support combustion.

In addition to the environmental factors described above, there are other spill source considerations that should be recognized as they influence the full potential for elimination of spilled oil by burning:

- The spill scenarios associated with Shell's operations in the Chukchi Sea involve the release of oil and gas from a subsea blowout (in contrast to an above-water release such as from a fixed drilling structure). Oil would therefore be released to a relatively small area on the water with initial slicks with widths of typically a few hundred meters or less. Even with the gas-induced flow of oil and water toward the surface and the resulting radial spread of oil outward from the source, the initial area of involvement will be localized and relatively easy to contain and/or deflect with booms.
- Because of the likely release of large quantities of natural gas and vapors from the surfacing oil, it is likely that early ignition of that gas would be desirable as soon as the drillship is moved off location. The vapor cloud could be readily ignited using standard ignition procedures, thereby eliminating the accidental ignition of the source when vessels are in close proximity. The early ignition of the source would not only be prudent for safety reasons, it is possible that significant quantities of oil could be eliminated through combustion at/near the source. The potential ignition is intended to improve on-site safety conditions for responders; potential oil elimination is an ancillary benefit. As such, no RPS reduction is taken. Additionally, because potential ignition is not posed as a response tactic, we anticipate the decision to ignite surfacing gas would be made by the UC as a part of a fully developed, and agreed upon, portion of an IAP, and independent of the *in situ* burning guideline process.

- With or without ignition of the blowout, prevailing atmospheric conditions in the Chukchi Sea will support safe operating conditions at or beyond a few hundred meters downwind of the source.

To summarize key points: the nature of oil released to the surface; the oil's limited spread due to reduced temperatures (and possible ice); and the potential for responders to access the oil before it moves far from the source and begins to weather, all enhance the potential for successful recovery and/or burning operations.

E.4 GUIDELINES FOR WELL CONTROL AND SAFETY OF PERSONNEL AND PROPERTY

Safety procedures and planning in accordance with established guidelines are emphasized throughout the training, preparation, and conduct of *in situ* burning operations.

In situ burning is monitored to ensure that fire does not spread to any nearby uncontained oil and that burns are conducted at safe operating distances from all vessels and personnel. Personnel and equipment used in conducting the operation maintain safe distances from the spill source and ongoing natural gas normally already ignited. The safe working distances from an *in situ* burn on water depend on the size of the fire and the exposure time, as presented in Table E-4. Safety procedures and planning in accordance with established guidelines are employed throughout the training, preparation and conduct of *in situ* burning operations. Although the planning and conduct of operations are the same, distinction is made between the elimination of oil as a response technique, and the ignition of surfacing gas as a safety measure. When ignition of oil *in situ* as a response action is proposed, the permitting process on the *In Situ* Burning Guidelines for Alaska will be followed. The elimination of gas as a safety measure, not related to oil elimination, is a UC decision that may follow the same planning process, but does not seek the permit necessary in the *In Situ* Burning Guidelines and issued by the ARRT.

**Table E-4
 Safe Working Distances from the Fire**

PERSONNEL EXPOSURE TIME	PERSONNEL MINIMUM DISTANCE FROM FIRE (FIRE DIAMETERS)
Indefinite	1.2 m (4 ft)
30 min	0.9 m (3 ft)
5 min	0.6 m (2 ft)

Aerial ignition with gelled fuel from a heli-torch or with other ignition devices is coordinated, taking into account prevailing weather conditions, oil pool size and distribution, and the need for strict adherence to established safety practices.

E.5 CONDITIONS FOR USE

In situ burning will be considered as a secondary response technique. Alternate, non-mechanical response options may be employed to augment mechanical recovery strategies, or to supplement them if conditions make mechanical recovery ineffective. Additionally, the response options may be employed if their use is deemed to be more environmentally beneficial than if their use is withheld. Note that the equipment necessary to conduct initial non-mechanical response missions is already made available by Shell and will be staged on the

OSR vessels. The cascading of additional non-mechanical resources, from beyond the immediate region, is well established.

Upon approval, incident-specific conditions associated with the approval shall be met. Alternative response techniques shall require a test to determine if its use is feasible given environmental and oil conditions. If the event warrants the consideration of alternative methods, assets will be immediately mobilized to support operations. The efficiency of *in situ* burning decreases as the oil weathers, presenting a relatively narrow window of opportunity for use of *in situ* burn methods. On-site assets shall be deployed upon approval by the UC.

Key Combustion Processes

The following discussion summarizes the current state of understanding of the scientific principles and physical processes involved with *in situ* burning of oil on water and ice.

For an oil slick on water or ice to become ignited, the oil must be thick enough to insulate itself from the water beneath it. The igniter can heat the surface of thickened oil to the flash point temperature at which the oil produces sufficient vapors to ignite. The “rules of thumb” for minimum ignition thickness are listed in Table E-5.

Table E-5
Minimum Ignitable Oil Thickness on Water
(Adapted from Buist et al. 2003)

OIL TYPE	MINIMUM THICKNESS
Light Crude and Gasoline	1 mm (0.04 inches)
Weathered Crude and Middle-Distillate Fuel Oils (Diesel and Kerosene)	2 to 3 mm (0.08 to 0.12 inches)
Residual Fuel Oils and Emulsified Crude Oils	10 mm (0.4 inches)

The oil removal rate for *in situ* oil fires is a function of fire size (or diameter), slick thickness, oil type and ambient environmental conditions. For most large (greater than about 10 ft [3 m] diameter) fires of unemulsified crude oil on water, the rule of thumb is that the burning consumption rate is 3.5 mm/min. Lighter fuels burn faster while heavier oils and emulsions burn slower, as presented in Table E-6.

Table E-6
Burn Removal Rates for Large Fires on Water
(Adapted from Buist et al. 2003)

OIL TYPE/CONDITION	BURN/REMOVAL RATE
Gasoline >10 mm (0.4 inches) thick	4.5 mm/min (0.18 inches/min)
Distillate Fuels (diesel and kerosene) >10 mm (0.4 inches) thick	4.0 mm/min (0.16 inches/min)
Crude Oil >10 mm (0.4 inches) thick	3.5 mm/min (0.14 inches/min)
Heavy Residual Fuels >10 mm (0.4 inches) thick	2.0 mm/min (0.08 inches/min)
Slick 5 mm (0.2 inches) thick ¹	90% of rate stated above
Slick 2 mm (0.1 inches) thick ¹	50% of rate stated above
Emulsified oil (percent of water content) ²	Slower than above rates by a factor equal to the water content percent
Estimates of burn/removal rate based on experimental burns and should be accurate to within ±20 percent.	

¹ Thin slicks will naturally extinguish, so this reduction in burn rate only applies at the end of a burn.

² If ignited, emulsions will burn at a slower rate almost proportional to their water content (a 25% water-in-crude-oil emulsion burns about 25% slower than the unemulsified crude).

Burn rate is also a function of the size of the fire. Crude oil burn rates increase from 1 mm/min (.04 inches/min) with 3-ft (0.9-m) diameter fires to 3.5 mm/min (0.14 inches/min) for 15-ft (4.6-m) diameter fires and greater. *In situ* burning on melt pools typically consumes oil at 1 mm/min (0.04 inches/min). For very large fires, on the order of 50 ft (15.2 m) in diameter and larger, burn rates may decrease slightly because there is insufficient air in the middle of the fire to support combustion at 3.5 mm/min (0.14 inches/min). As fire size grows to the 50-ft (15.2-m) range, oil type ceases to affect burn rate for the same reason.

An *in situ* oil fire extinguishes naturally when the slick burns down to a thickness that allows enough heat to pass through the slick to the water to cool the surface of the oil, below the temperature required for sustained combustion. The thickness at which an oil fire on water extinguishes is related to the type of oil and initial slick thickness (Table E-7). Other, secondary factors include environmental effects such as wind (winds greater than 20 knots preclude *in situ* burning in most cases), current herding of slicks against barriers, and oil weathering.

Table E-7
Fire Extinguishing Slick Thickness
 (Adapted From Buist et al. 2003)

OIL TYPE/INITIAL SLICK THICKNESS	EXTINGUISHING THICKNESS
Crude Oil up to 20 mm (0.8 inches) thick	1 mm (0.04 inches)
Crude Oil 50 mm (2 inches) thick	2 to 3 mm (0.08 to 0.12 inches)
Distillate Fuels any thickness	1 mm (0.04 inches)

With an estimate of the initial thickness of a fully contained slick, or a measure of the burn time, it is relatively easy to estimate oil removal efficiency by burning. If not all of the slick area is on fire; the calculations need to account for this.

Oil removal efficiency through burning may be summarized as a function of the following key factors:

- Initial thickness of the slick,
- Thickness of the residue remaining, and
- Amount of the slick surface that was on fire.

The water current maintains the oil thickness in the open-apex configuration of a fire-resistant boom under tow, or against an ice edge in wind. When burning in a current, the fire slowly decreases in area until it reaches a size that can no longer support combustion. This herding effect can increase overall burn efficiencies, but it extends the time required to complete each burn.

The residue from typical, efficient (greater than 85 percent removal) burning of crude oil 10 to 20 mm (0.4 to 0.8 inches) thick is a semi-solid, tar-like layer that has an appearance similar to the skin on an old can of latex paint that has gelled. For thicker slicks, typical of what might be expected in a towed fire boom [about 150 to 300 mm (6 to 12 inches)], the residue can be a solid. Burn residue is usually denser than the original pre-burn oil, and usually does not spread because of its increased viscosity or solid nature.

Most unburned oil or burn residue following combustion would be transported from the vicinity of the blowout by wind or currents; should any residue remain on the surface in the immediate area, it could be recovered by various means, including the use of booms in open water conditions downstream of the burn area, or by response personnel using nets, poles or other simple equipment over-the-side of small work boats, subject to safe working conditions, weather, and available time.

Compared to unemulsified slicks, emulsions are much more difficult to ignite and, once ignited, display reduced flame spreading and more sensitivity to wind and wave action. Stable emulsion water contents are typically in the 60 percent to 80 percent range with some up to 90 percent. The oil in the emulsion cannot reach a temperature higher than 212°F (100°C) until the water is either boiled off or removed. The heat from the igniter or from the adjacent burning oil is used first, mostly to boil the water rather than heat the oil.

While formation of stable water-in-oil emulsion may decrease burn efficiency, emulsion formation is slowed dramatically by high ice concentrations and may not be a significant operational factor in planning *in situ* burning of oil on solid ice or naturally contained in higher concentrations of broken ice.

In summary, *in situ* burning of oil is efficient and rapid in broken ice conditions under the following conditions:

- The spilled oil is thicker than the minimum required for ignition [a thickness of 2 to 3 mm (0.08 to 0.1 inches)] results in 50 to 66 percent removal efficiency: 10 mm (0.4 inches) thickness, a typical thickness for wind-herded slicks on melt ponds on ice, gives 90 percent removal efficiency;
- Larger areas can be ignited. A 100 sq ft (9.3 sq m) slick on a melt pool will burn at 3.5 boph; a 50 ft (15.2 m) diameter, 0.4 inches (10 mm) thick slick will burn at 300 boph; and a 100 ft (9.3 m) diameter slick will burn at 1,200 boph;
- The oil is not more than 25 percent emulsified; and
- Herding in a current and enlarging fire diameters can increase burning rates.

The potential for efficient oil spill response (with or without burning) is strongly tied to the nature and amount of ice present. Seasonal ice conditions in Shell's area of interest in the Chukchi Sea during the proposed drilling season are addressed in Appendix H.

E.6 DECISION PROCESSES

There are several situations in which non-mechanical response techniques shall be considered. *In situ* burning is used as a supplemental technique to augment mechanical response methods (e.g., to treat slicks that escape containment and not readily accessible to mechanical response equipment, or slicks that are of imminent threat to sensitive resources). Additionally, when environmental conditions exceed the limitations of mechanical equipment or preclude its use, non-mechanical response methods are viable options.

The decision to use *in situ* burning will be based upon the following:

- Safety of Personnel.
- Incident-specific strategies to ensure mechanical recovery operations are not impeded through the implementation of alternative methods.
- Use of the technique results in a net benefit by reducing oil spill impacts to sensitive resources and shoreline.
- Method of efficacy monitoring shall be implemented as agreed upon by the FOSC or, as appropriate, the UC.

As covered in Shell Tactic OR-7 and ACS Tactics B-1 through B-7, burning may be used as a spill control measure once regulatory approval has been obtained. When mechanical recovery is not practicable or less effective, removing oil from the water through the use of *in situ* burning may provide significant protection for fish, wildlife, and sensitive environments, as well as commercial, subsistence, historic, archaeological, and recreational resources.

In situ burning may:

- Prevent the resources from coming into contact with spilled oil;
- Reduce the size of the spill and thus the amount of spilled oil affecting natural resources;
- Allow the environment to recover more quickly to the pre-spill state; and
- Provide the most effective means to remove oil from water prior to shoreline impacts in varying ice conditions, in remote or inaccessible areas, or when containment and storage facilities are overwhelmed.

E.7 APPROVAL PROCEDURES AND FORMS

In situ burning in the OCS waters is under the command of the FOSC, in this case, the USCG. Although the FOSC may have final authority within OCS waters, if a UC is established, application will be made through the IC. Shell will comply with Unified Plan requirements, including the use of Revision 1 of the “*In Situ* Burning Guidelines for Alaska” checklists (Figure E-1) prior to the use of burning (e.g., size of burn, use of fire boom, trained personnel, and ignition). Shell will comply with UC conditions of approval and is prepared to implement monitoring of efficacy and the SMART protocols as conditions allow.

Application for approval of the use of *in situ* burning will be made to the UC. The ARRT, comprised of federal, state, and local governmental agencies, will act as an advisory board to the FOSC.

The need for the use of *in situ* burning to augment mechanical recovery is determined and approved by the FOSCs and SOSCs within the UC. Input and considerations from local stakeholders and regulatory authorities shall be vetted through the On-Scene Coordinators and IC.

Application for the use of *in situ* burning will be coordinated with resource agencies within the IMT EU. Requests for approval shall be made consistent with procedure “*In Situ* Burning Guidelines for Alaska”, Revision 1, dated August 2008.

**Figure E-1
 Application and Burn Plan**

Appendix 1: Application and Burn Plan

In Situ Burning Guidelines for Alaska

Incident Name: _____ Incident Location: _____ Incident Date: _____ Incident Time: _____ Title of Applicant: _____ Address: _____ Affiliation: _____ Phone: _____ Fax: _____	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;"><u>Date Prepared</u></td> <td colspan="2" style="text-align: center;">Operational Period</td> </tr> <tr> <td colspan="2"></td> <td style="text-align: center;">Date</td> <td style="text-align: center;">Time</td> </tr> <tr> <td style="text-align: center;"><u>Time Prepared</u></td> <td style="text-align: center;">Start:</td> <td></td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">End:</td> <td></td> <td></td> </tr> </table>	<u>Date Prepared</u>		Operational Period				Date	Time	<u>Time Prepared</u>	Start:				End:		
<u>Date Prepared</u>		Operational Period															
		Date	Time														
<u>Time Prepared</u>	Start:																
	End:																

PART 1

Potential Burn Location _____
 Site Description _____
 Latitude _____
 Longitude _____

Type of Incident (check one):
 Grounding
 Transfer Operations
 Explosion
 Collision
 Blowout
 Other _____

Product Released (check one):
 North Slope Crude
 Cook Inlet Crude
 Residual/Bunker Oil
 Diesel #2
 JP4
 Other _____

Estimated Volume of Released Product:
 _____ gallons, or
 _____ BBL

Estimated Volume of Product That May Potentially be Released:
 _____ gallons, or
 _____ BBL

Release Status (check one):
 Continuous
 Intermittent
 One time only, now stopped

If Continuous or Intermittent, estimated Rate of Release:
 _____ gallons, or
 _____ BBL

Estimated Surface Area Covered (square miles)
 At Time of Application _____

If inland, identify/describe:

- Vegetative cover at burn site (e.g., wetlands, grasslands, shrublands, forest, tundra, non-vegetated)
- Fire danger rating at and near the burn site (see Appendix 6)

 Whether burn is on permafrost
 Yes
 No
 Any ignitable vegetation near the burn
 Yes
 No
 Any structures/buildings near the burn
 Yes
 No

Why is mechanical recovery alone **inadequate** for spill response?

Consider the spill size, forecasted weather and trajectories, amount of available equipment, time to deploy, and time to recover.

Will you use mechanical recovery in conjunction with in situ burning? _____ yes no

Have you evaluated dispersants? _____ yes no

Will you use dispersants in conjunction with in situ burning? _____ yes no

Why is in situ burning preferred? _____

49

Revision 1-August 2008

Figure E-1 Application and Burn Plan (Continued)

**Appendix 1: APPLICATION AND BURN PLAN
In Situ Burning Guidelines for Alaska**

Proposed Burn Date and Time _____

Describe how you intend to carry out the burn.

Check one:

Ignition is away from source after containment and movement of the oil to safe location (i.e., controlled burn).

Ignition of uncontained slick(s) is at a safe distance from the source.

Ignition is at or near source without controls.

How will you ignite the oil? _____

Enter the volume of oil you expect to burn:

Fire No.	Oil Volume (BBL__ or Gal__)	Fire Duration (Hrs__ or Min__)
1		
2		
3		
4		
5		
Attach a list for more fires.		
Total Vol.:		

How many simultaneous burns are planned?

What distance will separate simultaneous burns?

Are you planning sequential or repeat (not simultaneous) burns?
yes no

Estimated area of oil in uncontrolled burn (square feet) _____

Describe your ability and procedures to extinguish the burn if necessary or directed to do so.

Part 3

Attach a chart with a distance scale. Show estimated spill trajectory and landfalls, with time. Show the location and distance of your proposed burns relative to the following features:

1. Source:
Location _____
Distance from Burn (miles) _____

2. Ignitable slicks:
Location _____
Distance from Burn (miles) _____

3. Nearest Land (burns on water) or Non-Flat Terrain (burns on land):
Location _____
Distance from burn (miles) _____

Nearby Populated Areas (i.e., one or more non-spill-related people present):
Location _____
Distance from Burn (miles) _____

Location _____
Distance from Burn (miles) _____

Location _____
Distance from Burn (miles) _____

For Inland Burns consider

- Ignitable vegetation
- Structures/buildings
- Areas with Fire Danger Rating of extreme, very high, or high
- Nearest airport
- Alaska Class I Area (see Appendix 4)

4. Attach a drawing showing your mechanical recovery and in situ burning equipment configurations.

6. For burns potentially impacting populated areas, provide an air monitoring plan in accordance with the SMART protocols.

7. Identify whether any Class 1 Areas (Appendix 4) will be impacted.

51
Revision 1-August 2008

**Figure E-1
Application and Burn Plan (Continued)**

Appendix 1: APPLICATION AND BURN PLAN In Situ Burning Guidelines for Alaska		
Part 4		
How do you plan to collect burned oil residue? _____ _____		
How do you plan to store and dispose of burned oil residue? _____ _____		
For inland burns, how do you plan to address post- burn erosion if applicable?		
Describe plan for eliminating risk (if any) of accidental (secondary) fires (e.g., structures/buildings and/or vegetation). _____ _____		
Will the burn affect visibility at downwind airports within 20 miles? _____		
Signatures		
_____ _____ _____ _____		
Signature of Applicant		
_____ _____		
Printed name of Applicant		
_____ _____		
Date and Time Submitted to Federal and State On-Scene Coordinators		
_____ _____		
Prepared by: _____	ICS Position: _____	Phone: _____

TABLE OF CONTENTS

APPENDIX F TRAINING AND DRILL INFORMATION [30 CFR 254.29]	F-1
F.1 TRAINING AGENDA FOR MANAGERS OF SPILL RESPONSE TEAM AND QUALIFIED INDIVIDUAL	F-1
F.2 TRAINING AGENDA FOR SPILL RESPONSE TEAM MEMBERS	F-1
F.3 TRAINING RECORD STORAGE.....	F-3
F.4 OTHER TRAINING.....	F-11
F.5 NATIONAL PREPAREDNESS FOR RESPONSE EXERCISE PROGRAM	F-11
F.6 RECORD OF EXERCISES.....	F-13

FIGURES

Figure F-1	Shell IMT / QI Training - January 2012.....	F-6
Figure F-2	Shell IMT / ICS 300 Training - January 2012.....	F-9

TABLES

Table F-1	OSHA 29 CFR 1910.120(q) Emergency Response Training Requirements.....	F-2
Table F-2	Shell Training Records – Contact and Location	F-3
Table F-3	OSRO Training Records – Contact and Location.....	F-4
Table F-4	Response Contractor Training Records – Contact and Location.....	F-4
Table F-5	Training Records – IC, IMT	F-4
Table F-6	IMT Dispersant Application / <i>In Situ</i> Burning Training	F-5
Table F-7	Example MSRC Dispersant Aircraft Flight / Training.....	F-5
Table F-8	Shell 2013 IMT Training.....	F-11
Table F-9	NPREP Spill Response Exercises	F-12

THIS PAGE
INTENTIONALLY
LEFT BLANK

APPENDIX F TRAINING AND DRILL INFORMATION [30 CFR 254.29]

F.1 TRAINING AGENDA FOR MANAGERS OF SPILL RESPONSE TEAM AND QUALIFIED INDIVIDUAL

Shell provides annual IMT training. This training will follow the NIMS-required training guidelines. NIMS training that will be conducted for Shell personnel include online courses and classroom training. In addition, Shell will sponsor IMT workshops that focus on the planning cycle for oil spill response. Examples of ICS training courses include but are not limited to:

1. ICS/100 and ICS/200 (online training);
2. ICS/300 as a two-day training event; and
3. Shell QI / IC training.

Shell's IC, Operations Section Chief, and Planning Section Chief, and their alternates will receive the following training on an annual basis:

1. The location, intended use, operational and logistical requirements as well as deployment strategies of primary equipment named in the OSRP;
2. Trajectory information; and
3. Regulatory agency notification requirements.

Shell's IMT members receive the following training on an annual basis through Drills and Exercises:

- Notification procedures;
- Communication systems used for notifications;
- Location / set up of Incident Command Post;
- Authority of incident commander;
- Organizational structure that will be used to manage the response actions;
- Responsibilities and duties of the SRT member within the organizational structure, in accordance with designated job responsibilities; and
- Record keeping.

Example rosters for Shell's IMT / QI and ICS 300 training, completed in January 2012, are depicted in Figures F-1 and F-2. Additional training is scheduled for the first quarter of 2014.

Shell's OSROs (ACS) and response contractors (ARS and AES-RO) may also provide IMT training for personnel. For example, ACS Tactic A-4 describes Shell's OSRO IMT training program.

F.2 TRAINING AGENDA FOR SPILL RESPONSE TEAM MEMBERS

Shell's OSROs and response contractors conduct equipment training in the field (e.g., boom deployment, skimmer and lightering equipment operation) and on-the-job training to ensure response personnel are trained and kept current in the specifics of plan implementation, equipment deployment, and mobilization of personnel and resources.

Shell requires HSSE programs for all employees, including response contracted organizations. Spill response training is based on the NPREP guidelines (August 2002). Shell OSRO and response contractor spill response training includes:

- Federally mandated: HAZWOPER, HAZCOM: Spill responders are required to have initial emergency response training and annual refresher training, which meets or exceeds the requirements in the HAZWOPER regulations, 29 CFR 1910.120(q). Alaska’s regulations covering Occupational Safety and Health are similar to the federal regulations. OSHA training requirements for emergency response personnel are summarized in Table F-1.
- Company-directed: Shell-chartered equipment providers, and contracted response organizations, participate by their labor category or as-needed. Examples of this training include NSTC topics, first-aid, employee orientation, and CW / HUET training. For example, Shell’s OSRO has specific training established for specific labor categories and response duties (e.g., ACS Tactic A-4, Training Requirements for Response Personnel). Shell also has internal requirements for training, drills, and exercise such as those within the HSSE Control Framework Oil Spill Manual

**Table F-1
OSHA 29 CFR 1910.120(q)
Emergency Response Training Requirements**

POPULATION	INITIAL TRAINING	ANNUAL REFRESHER TRAINING	CERTIFYING ORGANIZATION
FIRST RESPONDER AWARENESS LEVEL 1	Sufficient training or proven experience in specific competencies (generally 2-6 hours for new employees)	Annual refresher or demonstration of competency	Initial-not required Annual-employer
FIRST RESPONDER OPERATIONS LEVEL 2	Level 1 competency and 8 hours initial or proven experience in specific competencies listed in 29 CFR 1910.120 (q)(6)(ii)[A]-[I]	Same as above	Initial - employer Annual - employer
HAZARDOUS MATERIALS TECHNICIAN 3	24 hours of Level 2 and proven experience in specific competencies listed in 29 CFR 1910.120(q)(6)(iv)[A]-[I]	Same as above	Initial - employer Annual - employer
HAZARDOUS MATERIALS SPECIALIST 4	24 hours of Level 3 and proven experience in specific competencies listed in 29 CFR 1910.120(q)(6)(iv)[A]-[I]	Same as above	Initial - employer Annual - employer
ON-SCENE INCIDENT COMMANDER 5	24 hours of Level 2 and additional competencies listed in 29 CFR 1910.120(q)(v)[A]-[F]	Same as above	Initial - employer Annual - employer

As described in ACS Tactic A-4, Shell’s OSRO also offers an ADEC-approved spill prevention and response training program available for Shell and ACS oil spill response personnel. This training includes regulatory-required training as well as training specific to aspects of spill response. Newly identified training needs developed and incorporated these needs into the training program. ACS Tactic A-4 lists minimum training requirements for North Slope spill response personnel to be Initial Emergency Response (24-Hour Hazmat Technician) and H₂S Training. Shell’s OSRO also holds contracts with other response action contractors and OSROs that will be able to provide additional trained and qualified spill responders. A complete list of ACS training courses can be found on their web site at www.alaskacleanseas.org.

Shell OSR Training Academy

The Shell training academy OSR component has been developed to ensure response personnel are current and recently familiar with all aspects of oil spill response management and operations. The training academy addresses regulatory-required, company-required, and hands-on field training involving response equipment familiarization, deployment, and operation. This comprehensive pre-deployment training event and on-the-job training ensures that

personnel documentation and competency criteria have been satisfied prior to the start of the the drilling season.

The Shell Training Academy provides for Shell OSRO and response contractor training on ACS Tactics DT-1, DT-2, DT-3 and Shell Tactics OR-8, OR-9A and OR-9B (as listed in Table 2.7.9.1) that provide for dispersant application and use procedures. Also, select response team members, based upon their assigned responsibilities, will receive ACS training on *in situ* burning methods and techniques including ACS Tactics B-1, B-2, B-3, B-4, B-5, B-6, B-7 and Shell Tactics OR-7 (listed in Table 2.7.9-2). Shell’s North Slope OSRO also conducts *in situ* burning training and competency evaluations several times a year at different North Slope locations. Typically, courses involve classroom instruction and field exercises (Appendix E). Vessel-based responders are trained in use of *in situ* burning equipment and materials to implement SMART protocols.

The Shell spring training academy is in addition to training and qualification provided by contractors that provide a specialized service (e.g., vessel captains, pilots). Records required for specialized services are maintained by each individual contractor and would be made readily available for audit and verification purposes.

F.3 TRAINING RECORD STORAGE

Training records, certificates of completion, and attendance records for Shell IMT and Shell’s Training Academy are maintained electronically. Hard copy records will be maintained for a minimum of five years. Participant records are also maintained and made readily available immediately after the academy for audit and verification purposes at Shell’s Anchorage offices

Table F-2 provides the location and contact information for Shell training records.

**Table F-2
 Shell Training Records – Contact and Location**

LOCATION OF REQUIRED TRAINING RECORDS	
Contact	Emergency Response Coordinator or Designee
Company	Shell
Address	3601 C Street, Suite 1000, Anchorage, AK 99503
Telephone	907-538-1653

Shell’s OSROs and response contractors also maintain records of the courses taken by each employee and contractor. The course description, date completed and the employee or contractor current status are available from these databases. The OSRO or response contractor instructors’ training records and qualifications are also maintained in the database. ACS training records, certificates of completion, and attendance records are stored at their offices (Table F-2). Records are kept for a minimum of five years or for the duration of time that the employee or contractor is assigned responsibilities in this OSRP. Records are available in a timely manner upon request.

Table F-3 provides the location and contact information for Shell’s OSRO training records.

**Table F-3
OSRO Training Records – Contact and Location**

LOCATION OF REQUIRED TRAINING RECORDS		
ACS	Contact	SRT Training Specialist / IMT Training Specialist
	Address	#1 Spine Road, Prudhoe Bay, AK 99734
	Telephone	907-659-3226 / 907-659-3206
MSRC	Contact	Training Specialist
	Address	220 Spring Street, Suite 500, Herndon, VA 20170
	Telephone	703-326-5617

Table F-4 identifies the location for records and the contact information for Response Contractor training records.

**Table F-4
Response Contractor Training Records – Contact and Location**

LOCATION OF REQUIRED TRAINING RECORDS		
ARS	Contact	Operations Manager
	Address	7260 Homer Drive, Anchorage, AK 995118
	Telephone	907-865-4910
AES-RO	Contact	Operations Manager
	Address	3900 C Street, Anchorage, AK 99503
	Telephone	907-339-5484

An overview of training is provided in Table F-5 for the IC, Operations Section Chief, Planning Section Chief and Source Control Section. Training is due annually and completed prior to drilling.

**Table F-5
Training Records – IC, IMT**

TRAINING RECORDS – IC, IMT *			
Title	Location	Date	Type of Training
IC	Anchorage, AK	Spring 2014*	QI / IC / IMT Training
Alternates	Anchorage, AK	Spring 2014	QI / IC / IMT Training
Operations Section Chief	Anchorage, AK	Spring 2014	IMT Training
Alternate	Anchorage, AK	Spring 2014	IMT Training
Planning Section Chief	Anchorage, AK	Spring 2014	IMT Training
Alternate	Anchorage, AK	Spring 2014	IMT Training
Finance Section Chief	Anchorage, AK	Spring 2014	IMT Training
Alternate	Anchorage, AK	Spring 2014	IMT Training
Logistics Section Chief	Anchorage, AK	Spring 2014	IMT Training
Alternate	Anchorage, AK	Spring 2014	IMT Training

*Training completed for IMT positions in Spring 2014, prior to drilling. Reference OSRP Part 2 Table 2.2-1 for IMT personnel assignments.

Additional training is planned specifically for countermeasures such as dispersant and *in situ* burning. This training will be completed prior to commencement of the drilling season and required annually.

Table F-6
IMT Dispersant Application / *In Situ* Burning Training

IMT DISPERSANT APPLICATION / <i>IN SITU</i> BURNING TRAINING (Training is due annually with completion scheduled prior to drilling.)			
Title	Location	Date	Type of Training
IC	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning
Deputy IC	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning
Operations Section Chief	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning
Planning Section Chief	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning
Planning Section Chief Alternate	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning
Logistics Section Chief	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning
Safety Officer	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning
Safety Officer Alternate	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning
Environmental Unit Leader	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning
Environmental Unit Leader Alternate	Anchorage, AK	Spring 2014*	Dispersant / <i>In Situ</i> Burning

*Training verified or provided for identified positions in Spring 2014, prior to drilling. Reference Part 2 Table 2.2-1 for IMT personnel assignments.

MSRC would provide trained personnel to participate in dispersant application via aircraft. Training records for MSRC personnel are maintained at MSRC offices and can be made available for review upon request. Large / joint training exercises are completed annually, such as those conducted by MSRC during 2011, as identified in Table F-7 below.

Table F-7
Example MSRC Dispersant Aircraft Flight / Training

LARGE / JOINT TRAINING EXERCISE - Dynamic Aviation, IAR, and MSRC (MINIMUM CRITERIA: ANNUALLY)		
TRAINING TYPE	LOCATION	DATE(S)
Dispersant Aircraft Flight / Training	Stennis, MS	9/27-28/2011
Dispersant Aircraft Flight / Training	San Diego, CA	10/18-19/2011

Figure F-1 Shell IMT / QI Training - January 2012

ICS 211p - Check-In List (Personnel)									
Incident: IMT/QI Drill JAN.26.2012 WCD Day 1 w/MC					Prepared By: Hyder, Craig at 1/26/2012 08:36				
Period: Period 1 (9/2/2011 04:15 - 9/3/2011 04:15)					Version Name: Anchorage International				
Check-In Location -- <input checked="" type="checkbox"/> Command Post <input type="checkbox"/> Staging Area <input type="checkbox"/> Other - Anchorage International									
Personnel Check-In Information									
In/Out Status	Name (Last, First)	Contact # (Mobile Phone)	Company / Agency	Classification	Assigned Section	Assigned Position	Home State	Check-In Date/Time	Check-Out Date/Time
IN	Hyder, Craig	[REDACTED]	ACS	Other	Truth/Control		AK	1/26/2012 08:45	
in	Bourgeois, Renee	[REDACTED]	Shell		Contingency Response Team Foreleader			1-26-12	
in	Sorenson, Chad	[REDACTED]	Shell		"	"		1-26-12	
in	Thurmond, Wesley	[REDACTED]	Shell		Logistics	Section Chief		1-26-12	
in	Wentler, Brent	[REDACTED]	Shell		ENVL	Lead		1-26-12 0900	
in	Franco, Lewis	[REDACTED]	Shell		"	"		0900	
IN	REEVE, KEVIN	[REDACTED]	UMIAA		CR	CONTINGENCY TEAM		0900	
ICS 211p - Check-In List (Personnel)									
© 1997-2012 dbSoft, Inc.									

ICS 211p - Check-In List (Personnel)									
Incident: IMT/QI Drill JAN.26.2012 WCD Day 1 w/MC					Prepared By: Hyder, Craig at 1/26/2012 08:36				
Period: Period 1 (9/2/2011 04:15 - 9/3/2011 04:15)					Version Name: Anchorage International				
Check-In Location -- <input checked="" type="checkbox"/> Command Post <input type="checkbox"/> Staging Area <input type="checkbox"/> Other - Anchorage International									
Personnel Check-In Information									
In/Out Status	Name (Last, First)	Contact # (Mobile Phone)	Company / Agency	Classification	Assigned Section	Assigned Position	Home State	Check-In Date/Time	Check-Out Date/Time
IN	Hyder, Craig	[REDACTED]	ACS	Other	Truth/Control		AK	1/26/2012 08:45	
IN	Kelliker, Roegan	[REDACTED]	Shell		Planning	Documentation Unit		1/26/12 08:45	
IN	Smith, Carol	[REDACTED]	Shell		Planning	Documentation Unit		1/26/12 08:45	
IN	Wright, Curtis	[REDACTED]	Shell		QI Ops	QI Ops		1/26/12 08:45	
IN	Haras, Pops	[REDACTED]	Shell		on scene group sup.			0845	
IN	Magneda, Carlos	[REDACTED]	Shell		Logistics			1/26/12 0850	
IN	Leighty, Wayne	[REDACTED]	Shell		Planning	Resource Unit Lead		1/26/12 08:22	
IN	Powell, Scott	[REDACTED]	Superior		-	-		1-26-12 08:50	
IN	Progers, Jeff	[REDACTED]	Superior		-	-		1-26-12 08:50	
IN	Mika Noel	[REDACTED]	Superior		ops			1-26-12 08:50	
IN	Joe Logistics	[REDACTED]	AES Ro		ops deputy			1-26 0851	
IN	Craig Blancher	[REDACTED]	Shell		ops deputy	Section Chief		1-26-08:50	
IN	Darla Dare	[REDACTED]	Shell		Planning Section	Deputy Section Chief		1-26-12 0855	
ICS 211p - Check-In List (Personnel)									
© 1997-2012 dbSoft, Inc.									

Figure F-1 Shell IMT / QI Training - January 2012 (continued)

ICS 211p - Check-In List (Personnel)									
Incident: IMT/QI Drill JAN.26.2012 WCD Day 1 w/MC					Prepared By: Hyder, Craig at 1/26/2012 08:36				
Period: Period 1 (9/2/2011 04:15 - 9/3/2011 04:15)					Version Name: Anchorage International				
Check-In Location - <input checked="" type="checkbox"/> Command Post <input type="checkbox"/> Staging Area <input type="checkbox"/> Other - Anchorage International									
Personnel Check-In Information									
In/Out Status	Name (Last, First)	Contact # (Mobile Phone)	Company / Agency	Classification	Assigned Section	Assigned Position	Home State	Check-In Date/Time	Check-Out Date/Time
IN	Hyder, Craig		ACS	Other	Truth/Control		AK	1/26/2012 08:45	
	Travis McNaair		Shell		Contingency Response	Task Force Leader	AK	1/26/2012 09:57	
	Taylor, Jennifer		Shell		JIC	PIO	AK	1/26/2012 09:00	
	Ellsworth, Steve		AES		Planning	Trainer		1/26/2012 9:01	
	Child, Susan		Shell		Deputy JIC/UC	Deputy JIC	AK	1/26/12 9:00 am	
	Stoll, Ken		Shell		Functions	CP		9 am 26 Jan 2012	
	WONG, SICAS		SHELL		OBSERVER	OBSERVER		9 am 1/26	
ICS 211p - Check-In List (Personnel)									
© 1997-2012 dbSoft, Inc.									

ICS 211p - Check-In List (Personnel)									
Incident: IMT/QI Drill JAN.26.2012 WCD Day 1 w/MC					Prepared By: Hyder, Craig at 1/26/2012 08:36				
Period: Period 1 (9/2/2011 04:15 - 9/3/2011 04:15)					Version Name: Anchorage International				
Check-In Location - <input checked="" type="checkbox"/> Command Post <input type="checkbox"/> Staging Area <input type="checkbox"/> Other - Anchorage International									
Personnel Check-In Information									
In/Out Status	Name (Last, First)	Contact # (Mobile Phone)	Company / Agency	Classification	Assigned Section	Assigned Position	Home State	Check-In Date/Time	Check-Out Date/Time
IN	Hyder, Craig		ACS	Other	Truth/Control		AK	1/26/2012 08:45	
	Maender, Gra		Shell		Log	Med Unit Lead		1/26/2012 8:55	
	Plak, Heather		Shell		Planning	Waste Coord.		1/26/2012 8:55	
IN	Laurie		Shell		Logistics	ICR		8:57	
IN	Moore, Susan		Shell		QI/IC	QI/IC		8:57 am	
IN	Miller, Jim		Shell		Source Cont.	"		1/26 09:00	
IN	Sans, Sandy		Shell/UC		Disposal			9:00 AM	
IN	Sandul, Walt		Shell		Sit It			9:00 am	
IN	Mike Coffey		Shell		Off Safety			9:00 am	
✓	JEAN LUCY		✓		SOFR	SOFR		9 A	
IN	Hocap, D. Pops		Shell		OFFSHORE OPERATIONS GROUP SUP.			09:00	
ICS 211p - Check-In List (Personnel)									
© 1997-2012 dbSoft, Inc.									

Figure F-2 Shell IMT / ICS 300 Training - January 2012

Attendance Training Roster

Print all information neatly. User form for all training conducted outside of Robert Training Center. Complete all sections. Send or fax to Asset Training Coordinator, Shell Alaska Venture, 907-646-7130 or email to Christine.Romero@shell.com

Course Title ICS 300	Training Location Shell Anchorage Frontier Bldg / CF 1023	ATC (Name & signature) GREGG MERRILL	Date 1/19/2012
Course Code HSSEMR000504	Instructor EMSI SHAWN ESSERT	Supervisor (signature) required for all self-taught training PETER VELAZ	Duration of session 16 hr

Last Name	First Name	Gender	Contractor /Employing Company	Work Location	Shell and GI-D Contractors must include Computer User ID	Cost Code	Signature
Boufrow	Kemal	M	SHELL	ANCH			[Signature]
Mercier	Matthew	M	SHELL	ANCH			[Signature]
Reagle	Zachary	J	SHELL	ANCH			[Signature]
THELLEN	CAROL	F	SHELL				[Signature]
BRZYBY	Louis	M	SHELL	WCK			[Signature]
VELAZ	PETER	M	SHELL	WCK			[Signature]

Data Privacy Statement
The personal data you provide Managed Account Creation forms will be held and processed for the purpose of Shell Learning record keeping and management. The personal data will be controlled by (or on behalf of) your Shell Learning representative and the Shell Open University (the 'datacontroller(s)'). The information will be retained only for as long as is permitted by local legislation and then destroyed.
In order to process the personal data you provide on these Managed Account Creation forms for the purposes indicated, your personal data may be disclosed to/ transferred to internal Shell applications.
The datacontroller (s) will try to ensure that your personal data is protected adequately wherever possible, even where countries outside the European Union (EU) to which it is transferred may provide a different level of (legal) protection of personal data from that offered by legislation in the EU. Countries to which your application form and other personal data you have supplied have been transferred can be provided on request.
By signing and returning this application form, you (1) declare you have read, understood and accepted the statements set out in this data protection form and (2) give your consent to the processing of the information contained in the attached Managed Account Creation forms.

Attendance Training Roster

Print all information neatly. User form for all training conducted outside of Robert Training Center. Complete all sections. Send or fax to Asset Training Coordinator, Shell Alaska Venture, 907-646-7130 or email to Christine.Romero@shell.com

Course Title ICS 300	Training Location Shell Anchorage Frontier Bldg / CF 1023	ATC (Name & signature) GREGG MERRILL	Date 1/23-24/2012
Course Code HSSEMR000504	Instructor EMSI SHAWN ESSERT	Supervisor (signature) required for all self-taught training PETER VELAZ	Duration of session 16 hr

Last Name	First Name	Gender	Contractor /Employing Company	Work Location	Shell and GI-D Contractors must include Computer User ID	Cost Code	Signature
McNair	Travis	M	SHELL	ANC			[Signature]
Sampson	Chad	M	SHELL	ANC			[Signature]
Romak	Michelle	F	SHELL	ANC			[Signature]
Taylor	Jennifer	F	SHELL	ANC			[Signature]
Craddock-Melin	Jeanette	F	SHELL	ANC			[Signature]
Brown	Donald	M	SHELL	ANC			[Signature]
HORAN	DENNIS POPE	M	SHELL	ANC			[Signature]
Euphantis	Mark	M	SHELL	ANC			[Signature]
Cameron	GARY	M	SHELL	ANC			[Signature]
Stone	Marc	M	SHELL	ANC			[Signature]
Scott	Peter	M	SHELL	ANC			[Signature]
Musre	Susan	F	SHELL	ANC			[Signature]

Data Privacy Statement
The personal data you provide Managed Account Creation forms will be held and processed for the purpose of Shell Learning record keeping and management. The personal data will be controlled by (or on behalf of) your Shell Learning representative and the Shell Open University (the 'datacontroller(s)'). The information will be retained only for as long as is permitted by local legislation and then destroyed.
In order to process the personal data you provide on these Managed Account Creation forms for the purposes indicated, your personal data may be disclosed to/ transferred to internal Shell applications.
The datacontroller (s) will try to ensure that your personal data is protected adequately wherever possible, even where countries outside the European Union (EU) to which it is transferred may provide a different level of (legal) protection of personal data from that offered by legislation in the EU. Countries to which your application form and other personal data you have supplied have been transferred can be provided on request.
By signing and returning this application form, you (1) declare you have read, understood and accepted the statements set out in this data protection form and (2) give your consent to the processing of the information contained in the attached Managed Account Creation forms.

Figure F-2 Shell ICS 300 / IMT Training - January 2012 (continued)

Attendance Training Roster

Print all information neatly. User form for all training conducted outside of Robert Training Center. Complete all sections. Send or fax to Asset Training Coordinator, Shell Alaska Venture, 907-646-7130 or email to Christine.Romero@shell.com

Course Title ICS 300	Training Location Shell Anchorage Eganster Bldg / CF 1046	ATC (Name & signature) GEOFF MERRILL	Date 1/23-24/2012
Course Code HSSEMR000504	Instructor SHAWN ESSERT-EMSI	Supervisor (signature) required for all self-taught training PETER VEREZ	Duration of session 16 hr

Last Name	First Name	Gender	Contractor /Employing Company	Work Location	Shell and GI-D Contractors must include Computer User ID	Cost Code	Signature
FROST	Herschel	M	Shell	ANC			Herschel Frost
WESTLIEN	ERLING	M	Shell	ANC			Ernst Westlien
MILLER	JIM	M	Shell	ANC			Jim Miller
Magneda	Carlos	M	Shell	HOU			Carlos Magneda
JEAN	LUCY	F	✓	ACR			Lucy Jean
Dare	Darla	F	Shell	ANC			Darla Dare
Becker	Gary	M	SEPCO	ANC			Gary F. Becker
LoScuro	Joseph	M	ASS Response OPS	ANC			Joseph LoScuro
Pete Gaily	Pete	M	Shell	ANC			Pete Gaily
EMMERTSON	Jord	M	Shell	ANC			Jord Emmertson

Data Privacy Statement

The personal data you provide Managed Account Creation forms will be held and processed for the purpose of Shell Learning record keeping and management. The personal data will be controlled by (or on behalf of) your Shell Learning representative and the Shell Open University (the 'datacontroller(s)'). The information will be retained only for as long as is permitted by local legislation and then destroyed.

In order to process the personal data you provide on these Managed Account Creation forms for the purposes indicated, your personal data may be disclosed to/ transferred to internal Shell applications.

The datacontroller (s) will try to ensure that your personal data is protected adequately wherever possible, even where countries outside the European Union (EU) to which it is transferred may provide a different level of (legal) protection of personal data from that offered by legislation in the EU. Countries to which your application form and other personal data you have supplied have been transferred can be provided on request.

By signing and returning this application form, you (1) declare you have read, understood and accepted the statements set out in this data protection form and (2) give your consent to the processing of the information contained in the attached Managed Account Creation forms.

Attendance Training Roster

Print all information neatly. User form for all training conducted outside of Robert Training Center. Complete all sections. Send or fax to Asset Training Coordinator, Shell Alaska Venture, 907-646-7130 or email to Christine.Romero@shell.com

Course Title ICS 300	Training Location Shell Anchorage Eganster Bldg / CF 1046	ATC (Name & signature) GEOFF MERRILL	Date 1/23-24/2012
Course Code HSSEMR000504	Instructor SHAWN ESSERT-EMSI	Supervisor (signature) required for all self-taught training PETER VEREZ	Duration of session 16 hr

Last Name	First Name	Gender	Contractor /Employing Company	Work Location	Shell and GI-D Contractors must include Computer User ID	Cost Code	Signature
Childs	SUSAN	F	Shell	ANC			Susan Childs
BECKAR	LAURIE	F	SEPCO	ACR			Laurie Beckar
Margander	A. Michael	M	Shell	ANC			A. Michael Margander
MERRILL	GEORGE	M	SHELL	ANC			Geoff Merrill

Data Privacy Statement

The personal data you provide Managed Account Creation forms will be held and processed for the purpose of Shell Learning record keeping and management. The personal data will be controlled by (or on behalf of) your Shell Learning representative and the Shell Open University (the 'datacontroller(s)'). The information will be retained only for as long as is permitted by local legislation and then destroyed.

In order to process the personal data you provide on these Managed Account Creation forms for the purposes indicated, your personal data may be disclosed to/ transferred to internal Shell applications.

The datacontroller (s) will try to ensure that your personal data is protected adequately wherever possible, even where countries outside the European Union (EU) to which it is transferred may provide a different level of (legal) protection of personal data from that offered by legislation in the EU. Countries to which your application form and other personal data you have supplied have been transferred can be provided on request.

By signing and returning this application form, you (1) declare you have read, understood and accepted the statements set out in this data protection form and (2) give your consent to the processing of the information contained in the attached Managed Account Creation forms.

A summary of 2013 ICS drills and training completed by Shell IMT personnel (through November 2013) is provided in Table F-8. This was a non-drilling year.

**Table F-8
Shell 2013 IMT Training**

2013 IMT TRAINING	
Training Type	Date
ICS 300 Training	Jan 23
ICS 300 Training	May 19
ICS Drill – Fire on the Fennica	May 30
ICS 300 Training	Jun 25
ICS Drill – Hyperbaric injury to diver / medevac	Jul 2
ICS 300 Training	Jul 23
ICS 342 Documentation Unit Leader	Aug 26
ICS 346 Situation Unit Leader	Aug 26
ICS 348 Resource Unit Leader	Aug 28
ICS 320 Intermediate Incident Team	Oct 3
ICS Tabletop Exercise – OSRP and Environmental	Sept 16
IMT Exercise - Exercise scenario and objectives: Exercise WCD / well control event in Chukchi Sea; Prepare Day 1 IAP using proactive planning process; Exercise 201 process.	Sept 18
IMT Exercise - Exercise scenario and objectives: Exercise WCD / well control event in Beaufort Sea; Prepare Day 1 IAP using proactive planning process; Exercise 201 process.	Sept 25
ICS 320 Intermediate Incident Team	Oct 3
ICS 450 Advanced Logistics Section Chief	Oct 15-17
ICS 300 Training	Oct 23-24
ICS 430 Advanced Operations Section Chief	Oct 29-31

F.4 OTHER TRAINING

Based on applicable safety standards, a description of the steps necessary to develop an incident-specific safety plan for conducting a response are included in the following documents:

- Shell Tactics Manual, Tactics S-1 through S-4;
- ACS Technical Manual, Tactics S-1 through S-8, which include site entry procedures, site safety plan development, and personnel protection procedures;
- Shell Contractor Safety Handbook; and
- Shell’s HSSE Policy Statement and HSSE Management System.

Mandatory safety orientations are conducted for all Shell employees and contractors working at Shell-operated facilities, including additional training for employees in safety-critical positions.

F.5 NATIONAL PREPAREDNESS FOR RESPONSE EXERCISE PROGRAM

Shell will notify the BSEE Alaska Region OSRD Unit and other appropriate agencies 30 days in advance of any exercises that meet the requirements of 30 CFR 254.42(b)(2) or (4).

The NPREP guidelines (August 2002) is the basis for Shell’s spill response exercises. Section 6 of these guidelines describes the expected participants, scope, and objectives of exercises for Offshore Facilities.

The current plan for internal Shell response exercises includes:

- Pre-mobilization training exercises using the oil spill response equipment and selected vessels prior to the mobilization of personnel and equipment to the Chukchi Sea.
- Pre-startup exercises prior to the commencement of critical drilling activity, to be conducted in the vicinity of the first drilling location.
- Regularly scheduled exercises to maintain response capability while drilling is underway.
- Periodic IMT tabletop exercises will also be conducted during active drilling seasons.

Additional drills, both scheduled and unscheduled, may be conducted at the request of BSEE or other authorities. Three types of spill response exercises are described in Table F-9.

**Table F-9
 NPREP Spill Response Exercises**

SPILL RESPONSE EXERCISES		
Notification Exercise	Shell will conduct IC Notification Exercises at all offshore facilities manned 24 hours per day. Field personnel initiating the drill will document who was called, the time and date of the notification, and any phone number changes necessary as a result of the exercise. These drills will be documented.	Annually
Incident Management Team Tabletop Exercise	IMT tabletop exercises will be held in order to test the Team’s knowledge of the OSRP, and the individual roles on the team. The exercise will be announced; however, the scenario will remain unannounced. Fifteen components of PREP will be tested in a three-year period. The drill will be documented. Lessons learned will be discussed.	Annually
Equipment Deployment Exercise	Shell will verify that the major equipment providers identified in this plan participate in annual equipment deployment either as a result of an actual spill, training, or an exercise. Deployment will include a representative example of equipment as outlined in PREP.	Annually

As a member of Mutual Aid through Shell’s OSRO, Shell may be called upon to participate in a MAD to be conducted once a year as per NPREP guidelines. The MAD exercise may satisfy the NPREP requirements to exercise all aspects of the response plan at least every three years. To demonstrate Shell’s procedures for ensuring a response plan is exercised, and the IMT organization, communication and decision-making is acceptable for managing a response compliance, the spill response drill history for 2013 is presented in Table F-8.

Frequency and content are similar each year, except for inclusion of field drills when personnel and assets are conducting operations at a work site. Some drills and exercises are internal for Shell employee training purposes, and some are for regulatory invitation and evaluation. Drills that are hosted for regulatory participation include sufficient notice to allow regulatory participants to plan and coordinate their attendance.

F.6 RECORD OF EXERCISES

Exercise completion records for Shell IMT training are kept at Shell's offices. Typical forms that would be used to document exercise completion are presented at the end of this appendix. These records will be maintained for a minimum of five years. Exercise completion records are maintained and stored at Shell's Anchorage offices and are available in a timely manner upon request. Drill/Exercise completion certificates and attendance records are maintained at Shell's offices at 3601 C Street, Suite 1000, Anchorage, AK 99503.

ACS maintains a database as a record of the courses taken and exercises successfully completed by each employee and contractor. The course/exercise description, date completed and the employee or contractor current status are available from the database. The ACS instructors' training records and qualifications are also maintained in the database. Records are kept for a minimum of five years or for the duration of time that the employee or contractor is assigned responsibilities in this OSRP. Records are available in a timely manner upon request.

THIS PAGE
INTENTIONALLY
LEFT BLANK

**NPREP: INTERNAL EXERCISE DOCUMENTATION FORM - NOTIFICATION EXERCISE
(SHELL PERSONNEL MAY USE THE SPILL REPORT FORM FOR QI NOTIFICATION EXERCISE)**



Training / NPREP Exercise Documentation Form

Exercise / Event Name:		Date Prepared	
Exercise / Event Location:		Time Prepared	
Date of Exercise / Event:	Start Time:	End Time:	
<input type="checkbox"/> Exercise	<input type="checkbox"/> Event	<input type="checkbox"/> Internal Drill	<input type="checkbox"/> External Drill
<input type="checkbox"/> Announced		<input type="checkbox"/> Unannounced	
Exercises Performed	<input type="checkbox"/> Notification Exercise	<input type="checkbox"/> Spill Team Tabletop	<input type="checkbox"/> Area Exercise
	<input type="checkbox"/> Emergency Procedures	<input type="checkbox"/> Equipment Deployment	<input type="checkbox"/> Government Initiated
Notification Exercise	Person Notified:		<input type="checkbox"/> Business Hours <input type="checkbox"/> Non-Business Hours
	Is Person Identified in OSRP?	Position:	Listed as Qualified Individual
	<input type="checkbox"/> Yes <input type="checkbox"/> No		<input type="checkbox"/> Yes <input type="checkbox"/> No
	Method Used to Contact:		
Description of Notification Procedure:			
Emergency Procedures Exercise	Vessel/Barge/Facility Name:		
	<input type="checkbox"/> Response to Collision <input type="checkbox"/> Response to Spill On Deck <input type="checkbox"/> Response to Vessel Fire <input type="checkbox"/> Other		
	Description of Exercise:		
Spill Team Tabletop Exercise	Response Plan Scenario		<input type="checkbox"/> Average Most Probable Discharge
			<input type="checkbox"/> Maximum Most Probable Discharge
	Size of spill:	<input type="checkbox"/> bbls <input type="checkbox"/> gals	<input type="checkbox"/> Worse Case Discharge
	Description of Exercise:		
Lessons Learned	Description of Lessons Learned:		

NPREP: INTERNAL EXERCISE DOCUMENTATION FORM - NOTIFICATION EXERCISE
(SHELL PERSONNEL MAY USE THE SPILL REPORT FORM FOR QI NOTIFICATION EXERCISE) – Continued



Training / NPREP Exercise Documentation Form

Equipment Deployment Exercise	Equipment Owned By: <input type="checkbox"/> Plan Holder <input type="checkbox"/> ARS <input type="checkbox"/> AES <input type="checkbox"/> ACS				
	<input type="checkbox"/> Other:		Equipment in Preventative Maintenance Program? <input type="checkbox"/> Yes <input type="checkbox"/> No		
	Deployment Location:			In Intended Operating Environment? <input type="checkbox"/> Yes <input type="checkbox"/> No	
	Number of Support Personnel Involved:				
	Describe how Objectives were Exercised:				
Lessons Learned:					
Types of Skimming Systems Used			Types of Boom Systems Used		
Type	Asset Numbers	Amount	Type	Asset Numbers	Amount
<input type="checkbox"/> Lamor Brush - Oliophilic	_____	_____	<input type="checkbox"/> Conventional - Foam Filled	_____	_____
<input type="checkbox"/> Rope Mop - Oliophilic	_____	_____	<input type="checkbox"/> Coastal - Pressure Inflate	_____	_____
<input type="checkbox"/> Duplex Disc - Oliophilic	_____	_____	<input type="checkbox"/> Ocean - Pressure Inflate	_____	_____
<input type="checkbox"/> Duplex Drum - Oliophilic	_____	_____	<input type="checkbox"/> ShoreGuardian - Tidal Seal	_____	_____
<input type="checkbox"/> Transrec - Weir	_____	_____	<input type="checkbox"/> Fire Boom	_____	_____
<input type="checkbox"/> Oliophilic - Other: _____	_____	_____	<input type="checkbox"/> Other Boom: _____	_____	_____
<input type="checkbox"/> Weir - Other: _____	_____	_____	<input type="checkbox"/> Other Boom: _____	_____	_____
<input type="checkbox"/> Suction: _____	_____	_____	<input type="checkbox"/> Containment Boom <input type="checkbox"/> Protection Boom		
Core Plan Components Fulfilled in Exercises	<input type="checkbox"/> Notifications		<input type="checkbox"/> Protection of Sensitive Areas		
	<input type="checkbox"/> Staff Mobilizations		<input type="checkbox"/> Disposal of Recovered Material		
<input type="checkbox"/> Operate in Response Management System		<input type="checkbox"/> Communication			
<input type="checkbox"/> Unified Command <input type="checkbox"/> IMT		<input type="checkbox"/> Transportation			
<input type="checkbox"/> Source Control		<input type="checkbox"/> Personnel Support			
<input type="checkbox"/> Assessment		<input type="checkbox"/> Equipment Maintenance and Support			
<input type="checkbox"/> Containment		<input type="checkbox"/> Procurement			
<input type="checkbox"/> Recovery of Spilled Material		<input type="checkbox"/> Documentation			
Supporting Documents	ICS Forms <input type="checkbox"/> 201 <input type="checkbox"/> 204 <input type="checkbox"/> 214 <input type="checkbox"/> _____ <input type="checkbox"/> _____				
	<input type="checkbox"/> Lessons Learned Form <input type="checkbox"/> Action Item Form <input type="checkbox"/> Photo Page <input type="checkbox"/> _____				
Signatures	_____		Signature of Plan Holder Representative	_____	Company
	_____		Signature of OSRO Representative	_____	Company
	_____		Signature of Federal Representative	_____	Company
	_____		Signature of State Representative	_____	Company
				Date	

NPREP: INTERNAL EXERCISE DOCUMENTATION FORM - NOTIFICATION EXERCISE
 (SHELL PERSONNEL MAY USE THE SPILL REPORT FORM FOR QI NOTIFICATION EXERCISE) – Continued



Training / NPREP Exercise Documentation Form

Lessons Learned				
Safety Observations:				Was a STOP™ Card Used? <input type="checkbox"/> Yes <input type="checkbox"/> No
Equipment Involved	Asset Number	Equipment Involved	Asset Number	Damage to Equipment? <input type="checkbox"/> Yes <input type="checkbox"/> No (Check Equipment Box if Yes.)
<input type="checkbox"/>		<input type="checkbox"/>		
<input type="checkbox"/>		<input type="checkbox"/>		
<input type="checkbox"/>		<input type="checkbox"/>		
<input type="checkbox"/>		<input type="checkbox"/>		
Did Equipment Perform as Intended? <input type="checkbox"/> Yes <input type="checkbox"/> No	Comments:			
What Went Well				
Recommendations for Improvement				
Tactics Exercised	Comments or Recommendations for Improvement			

**NPREP: INTERNAL EXERCISE DOCUMENTATION FORM - NOTIFICATION EXERCISE
 (SHELL PERSONNEL MAY USE THE SPILL REPORT FORM FOR QI NOTIFICATION EXERCISE) – Continued**



Training / NPREP Exercise Documentation Form

Actionable Items				
Task No.	Task Description	Lead	Due Date	Comments
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
Was All Equipment Returned to Response Ready Status? <input type="checkbox"/> Yes <input type="checkbox"/> No		Was a Work Request / Work Order Initiated? <input type="checkbox"/> Yes <input type="checkbox"/> No (List Below)		
		Asset #		
		WR/WO #		
Prepared by:		Position:		Contact:

TABLE OF CONTENTS

APPENDIX G LOGISTICAL SUPPORT SERVICES AND SUPPLIES..... G-1

FIGURES

Figure G-1	Primary and Secondary North Slope Airfields	G-7
Figure G-2	Main Shell Locations and Transit Times.....	G-8

TABLES

Table G-1	Logistical Support Contractors	G-3
Table G-2	Primary Logistical Airfields	G-6

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

APPENDIX G LOGISTICAL SUPPORT SERVICES AND SUPPLIES

The Logistics Section Chief is responsible for providing facilities, transportation, communications, services, and material in support of the incident. The Logistics Services Branch may include communications, information technology, medical, and food units. The Support Branch may include transportation, personnel, equipment, facilities, and supplies. Primary logistical support for spill response is provided through response contractors.

Additional personnel and equipment resources may be accessed via ACS's APICOM mutual aid agreement as described in ACS Tactic L-10. APICOM has a mutual aid agreement to provide equipment and personnel to members on an as-available basis. Other qualified staff can be mobilized from within the Royal Dutch Shell Group in the U.S. and abroad. For notification and mobilization of additional Royal Dutch Shell Group staff, the Shell SART telephone contact is 713-241-2532. Through the SART link, access to as many as 2,000 Shell employees is available. ACS has implemented a number of master services agreements with a variety of contractors for services that may be required in a spill response. These are described in ACS Tactic L-9. Table G-1 presents a list of vendors in Alaska that Shell may call upon to support spill response operations. Additionally, Shell maintains a fleet of logistics vessels as described in the EP to provide ocean freight service during the drilling season. In the unlikely event of emergency, Shell will have access to additional fire boom through contracts with other OSROs such as MSRC, Clean Gulf Associates, and OSRL. Shell Logistics maintains call-out contracts with a variety of marine, road, aviation, expediting and logistics management service providers world-wide to support operations. This robust logistics support network is Shell-managed and available on short notice. Much of the heavy-lift capability, either marine or air based, would be consolidated in staging yards at either Dutch Harbor (marine) or the Anchorage airport (aviation) vicinity and forwarded to the operating areas as previously described.

Depending on the severity of a situation, federal and state logistics may also support the response. Examples of these functions include ordering, tracking and servicing government resources, arranging for transportation and lodging for government response staff, providing communications to government oversight staff, and performing other logistical functions specifically in support of the government oversight role. These governmental functions may become an integral part of the overall Logistics Section.

Out-of-Region Resource Mobilization

In the unlikely event that out-of-region resources are requested to supplement the response, additional personnel or equipment may be mobilized (from other stockpiles) via Shell-chartered or commercial aircraft. Personnel and equipment would first be flown to the Anchorage airport for assignment and deployment. The city of Anchorage has sufficient accommodations and storage areas for these resources until they are assigned or pre-staged on site. Tier III assets will be alerted and placed on stand-by status in the unlikely event that additional assets may be required. Resources may be requested, loaded, and flown from anywhere in the U.S. to the Anchorage airport in less than 24 hours. Equipment can arrive in Anchorage from most international locations in less than 72 hours.

Aviation support is available from current Shell Alaska Venture contracts, as depicted in Table G-1 and through ACS Tactic L-4, or through Shell Canada and Shell in the lower 48 states (Houston and New Orleans). Anchorage International Airport (Anchorage airport) is designated as the primary hub for initial distribution of personnel and equipment. The Anchorage airport can handle all heavy-lift operations to receive resources arriving from around the world. Examples of aircraft operating limitations are presented in Appendix A.

During a Tier II or III incident, air operations would primarily be conducted from the Shell hangar at the Barrow airport and from Deadhorse airport. Each airport has IFR (Instrument Flight Rules) capability with 200-ft ceiling and ½ mile restrictions. Jet A fuel is available at both airports. The airstrips at Wainwright, Point Hope, and Point Lay (to a limited extent) may be utilized as back-up landing sites, or to position response equipment, as needed, along the coast. Limitations for these airports are provided in Table G-2 and Figure G-1. Wainwright and Point Hope airports each have sufficient gravel runways to land a fully loaded C-130. Aviation fuel may also be delivered to remote areas via chartered fixed-wing air services. Specific runway composition and lengths are listed in the Shell Landing Locations (Figures G-1 and G-2). Flight times vary depending on type of aircraft; however, Figure G-2 provides distance and times to pre-identified staging areas.

Barrow and Deadhorse are controlled public airports that can handle heavy air traffic. Wainwright, Point Hope and some other North Slope Villages are uncontrolled but have maintained runways. All airports and associated communities have sufficient support contractors and lay-down areas for preliminary staging of resources. Shell has a permanently established, fully-functional, 50-man camp at Wainwright, provided by Olgoonik Corporation. Shell could supplement this camp with 200-man camp provided by OK's Cascade Company. This well-equipped facility is transportable via air and can be fully functional within five days.

Mobile Command Post

In the event that a forward command post is deemed necessary, Shell may activate command posts at existing facilities, or activate the Mobile Response Center available through ACS (Tactic L-4). Command posts at existing facilities are located in Barrow and Wainwright at Shell hangars at the respective airports. The Mobile Response Center may be deployed to other forward locations as dictated by the UC. The amount of equipment to outfit the command post will be determined by the size of the response, but in general the following list of materials and equipment should be considered in addition to equipment identified in ACS Tactic L-4.

- Telephones and telephone books
- Appropriate number of copy and facsimile machines and computer printers
- Desktop and portable computers with printers and facsimile/modem capability
- Internet and email access
- Office furniture
- Portable radios and marine communications base station
- Cameras and video recording/playback capability
- Office supplies (pens, pencils, paper, flash drives, blank CDs and DVDs, etc.)
- Chart paper with easels and status boards (dry-write)
- Overhead and computer projectors
- Applicable ESI maps
- Applicable MESA maps
- Copies of the Shell Chukchi Sea Regional Exploration Program Oil Spill Response Plan
- Copies of any appropriate local emergency response plans
- Copies of the Unified Plan and the North Slope Subarea Contingency Plans
- Copies of the Shell Upstream Americas Incident Management Handbook

**Table G-1
 Logistical Support Contractors**

COMPANY	SERVICES	CONTACT
TRANSPORTATION		
Era Helicopters 6160 Carl Brady Drive Anchorage, AK 99502	Rotary-wing Passenger Transport, Medevac, Small Cargo, Aerial Ignition	907-248-4422 907-550-8600
Frontier Flying Service 5245 Airport Industrial Road Fairbanks, AK 99709	Fixed-wing Passenger Transport, Cargo Transport, Medevac	907-450-7250 800-432-1359
Peninsula Airways, Inc. 6100 Boeing Avenue Anchorage, AK 99502	Fixed-wing Passenger Transport, Cargo Transport, Medevac	907-243-2485
Cook Inlet Tug & Barge, Inc. 812 Delaney St Anchorage, AK 99501	Marine Transportation, Tugs, Deck Barge	907-277-7611
Crowley-Alaska 201 Arctic Slope Ave Anchorage, AK 99518	Marine Transportation, Tugs, Barges, Petroleum Transport	907-777-5505
Cruz Marine, LLC 7000 E Palmer-Wasilla Highway Palmer, AK 99645	Marine Transportation, Tugs, Deck Barges	907-746-3144
Dunlap Towing Company 617 North First Street La Conner, WA 98257	Marine Transportation, Tugs, Barges	425-259-4163
Foss Maritime 660 W Ewing St Seattle, WA 98109	Marine Transportation, Tugs, Barges, Petroleum Transport, Lighterage	206-281-3800 800-562-2711
Harley Marine 910 SW Spokane St. Seattle, WA 98134	Marine Transportation, Tugs, Petroleum Transport	206-628-0051
Kirby Offshore Marine 2700 W Commodore Way Seattle, WA 98199	Marine Transportation, Tugs, Tank Barges	206-443-9418 (Seattle) 206-628-0051 (Dutch Harbor)
Carlile Transportation Systems 1800 E. First Avenue Anchorage, AK 99501	Ground Transportation	907-276-7797 800-478-1853
Lynden Transport 3027 Rampart Drive Anchorage, AK 99501	Ground Transportation	907-276-4800 800-326-5702

**Table G-1 (Continued)
 Logistical Support Contractors**

COMPANY	SERVICES	CONTACT
COMMUNICATIONS		
Sutaris 301 Calista Court, Suite B Anchorage, AK 99518	Remote Site Systems, Microwave/Satellite Radio Systems, VHF/UHF handheld radios, satellite and cellular telephones	907-344-1223
ASTAC 4300 B Street, Suite 500 Anchorage, AK 99503	Local & long-distance telephone service, Internet service (DSL, dial, wireless) cellular service	907-563-3989 (Anchorage) 907-852-7100 (Barrow)
AT&T Alascom 505 E. Bluff Drive Anchorage, AK 99501	Long-distance telephone service, Internet service, and WAN connectivity within AK and lower 48 states	800-620-6520
GCI 2550 Denali Street, Suite 1000 Anchorage, AK 99503	Cellular Services, Local and Long- distance telephone service, WAN connectivity within AK and lower 48 states. Internet service (dial, DSL, T1)	907-265-5454
North Slope Telecom 2020 E. Dowling #3 Anchorage, AK 99507	Telecommunications Services Feasibility Studies & System Design Operations and Maintenance Services Aviation, Marine, & Power Systems	907-751-8200
ProComm Alaska, LLC 4831 Old Seward Hwy, Suite 111 Anchorage, AK 99503	Radio Communications Motorola Service Wireless	907-563-1176

Table G-1 (Continued)
Logistical Support Contractors

COMPANY	SERVICES	CONTACT
FACILITIES		
Arctic Structures 9312 Vanguard Dr. Anchorage, AK 99507	Planning, Design, and Construction of Remote Camps Metal and Modular buildings.	907-522-2425
Bering Marine 6441 S. Airpark Place Anchorage, AK 99502	Barge Camps	907-248-7646 800-922-7501
Doyon Universal Services, LLC 11500 C Street, Suite 100 Anchorage, AK 99515	Camps and Catering	907-522-1300
Marsh Creek LLC 2000 E. 88 th Avenue, Suite 100 Anchorage, AK 99507	Housekeeping and Catering	907-258-0050
PacificRim Logistics 421 West 1 st Avenue, Suite 250 Anchorage, AK 99501	Remote Logistics Transportation Services	907-261-9440
Olgoonik Corporation P.O. Box 29 Wainwright, Alaska 99782	Wainwright Hotel and Man Camps	907-763-2613
Taiga Ventures 2700 S. Cushman St. Fairbanks, AK 99701	Remote Camps Camp Services Drilling Supplies	907-452-6631
OK'S Cascade Company 1429 Avenue D, #166 Snohomish, WA 98290-1742	Mobile Camps Personnel Base Camps	800-458-8061

**Table G-2
 Primary Logistical Airfields**

CITY	FAA LOCATION ID	REGION	AIRPORT NAME	TYPE	RUNWAY INFORMATION					MANNED	LANDING AIDS
					LENGTH (FT)	WIDTH (FT)	SURFACE	NUMBER AND ORIENTATION			
Anchorage	ANC	Southcentral	Ted Stevens Anchorage International	Primary	11,584	150	Asphalt	1	6/24	Continuous	dusk-dawn lights; VOR; NDB; ODALS; ALSF2; MALSR
Barrow	BRW	North Slope Borough	Wiley Post-Will Rogers Memorial	Primary	6,500	150	Asphalt	1	5/23	Sept - May 0600-1830, Jun - Aug 0700-2230	24 hr lights; MALSR approach lights; NDB; VOR
Deadhorse	SCC	North Slope Borough	Deadhorse	Primary	6,500	150	Asphalt	4	1/19	0700-1730	dusk-dawn lights; VOR; NSB; MALSR
Fairbanks*	FAI	Interior	Fairbanks International	Primary	11,800	150	Asphalt	2	9/27; 17/35	Continuous	dusk-dawn lights; VOR; NDB; ALSF2 & MALSR
Wainwright	AWI	North Slope Borough	Wainwright Airport	Commercial	4,494	90	Gravel	1	3/21	Unattended	dusk-dawn lights; NDB

*Back-up Staging Location

Figure G-1 Primary and Secondary North Slope Airfields


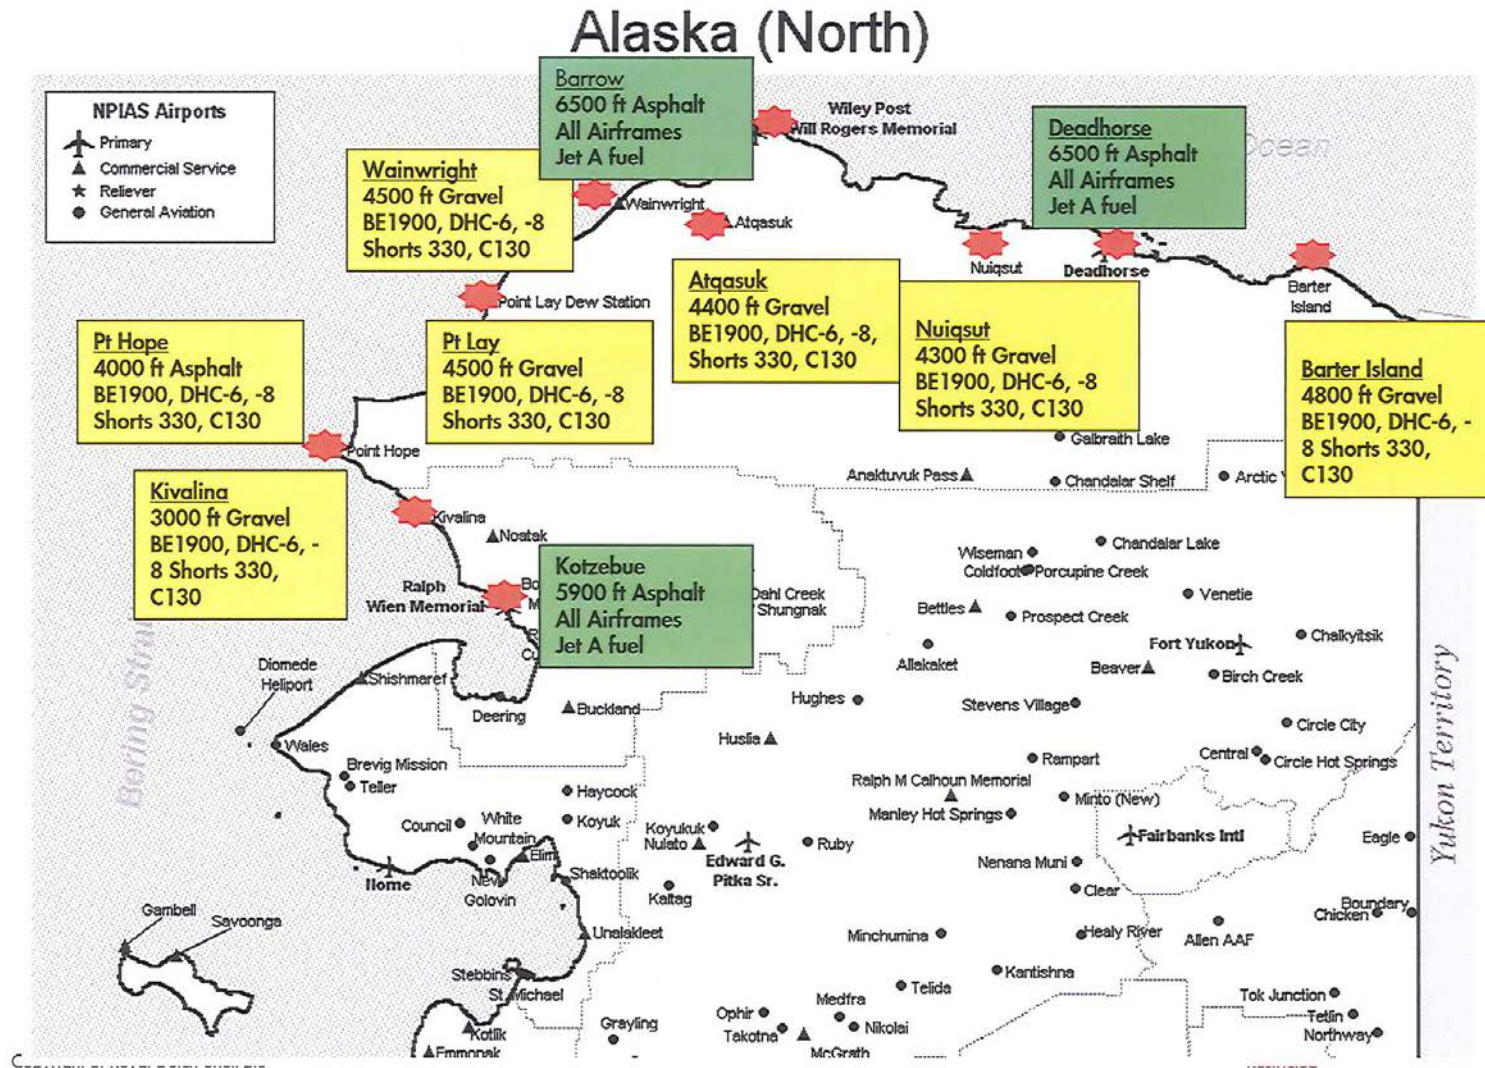


Figure G-2 Main Shell Locations and Transit Times

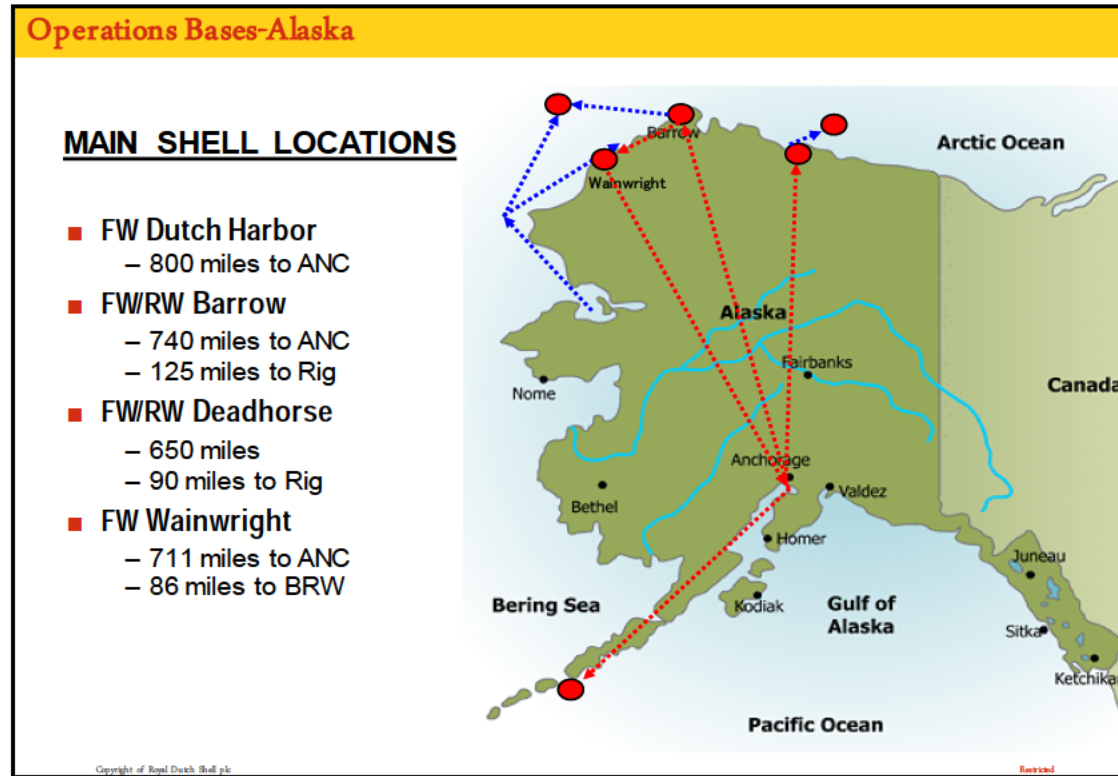

Transportation Mode	Anchorage to Deadhorse	Anchorage to Barrow	Anchorage to Wainwright	Deadhorse to Wainwright	Barrow to Wainwright	West Dock to Wainwright	Barrow to Drill Site	Wainwright to Drill Site	Goodhope Bay to Wainwright
Light-Transport Fixed Wing (150 mph)	4.3 hr	4.9 hr	4.7 hr	1.8 hr	0.6 hr	--	0.8 hr	0.5 hr	--
Heavy Transport Fixed Wing (300 mph)	2.2 hr	2.5 hr	2.4 hr	0.9 hr	0.3 hr	--	0.4 hr	0.3 hr	--
Helicopter (100 mph)	6.5 hr	7.4 hr	7.1 hr	2.7 hr	0.9 hr	--	1.2 hr	0.8 hr	--
Vessel-Based Transport (5 knots)	--	--	--	--	≈ 38 hr	≈ 54 hr	--	--	~75 hr
Vessel-Based Transport (10 knots)	--	--	--	--	--	--	≈ 11 hr	≈ 7 hr	~37 hr

Commercially available air transportation service providers and the specifications for their aircraft capacities and runway requirements are detailed below.


Alaska Air Cargo

Alaska Air Cargo has stations in Anchorage, Fairbanks, Barrow, Deadhorse and Kotzebue which provide shipment handling and tracking services. Alaska Airlines typically uses either a Boeing 737-400 Combi (Passenger and Freight) or a Boeing 737-400 Freighter (freight only). There are several cargo options available depending on delivery schedule and shipment weight or dimensions. Gold Streak service is a small package service booked on the next available flight. General and Priority Freight services are for heavier shipments with time-sensitive shipments sent Priority.

ULDs, typically referred to as “igloos” are also available and are more economical for frequent shipments. Igloo dimensions are 125 inches long by 88 inches wide by 77.5 inches high and are provided by Alaska Airlines to shippers for self-loading. Each igloo has a maximum payload of 6,000 lbs. Alaska Airlines sets customer service rates for igloos based on total weight of shipments over a period of time.



Alaska Airlines 737-400 Combi Aircraft in Barrow, Alaska

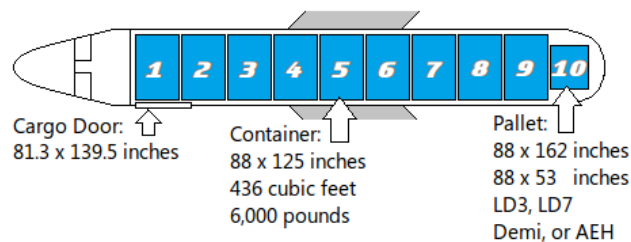

Alaska Airlines Boeing 737-400 Freighter Load Configuration


Everts Air Cargo

Everts headquarters are in Fairbanks, Alaska. Everts mainly focuses on business within interior Alaska, but provides charter and flagstop service to Barrow, Deadhorse and Wainwright and scheduled service to Kotzebue. Flagstop service is for shipments too small for a charter. Delivery to the final destination is provided through a second air carrier with smaller aircraft suited for rural Alaska runways. Everts offers small-package, general and priority service for scheduled and flagstop destinations. Shipments from Anchorage to Fairbanks are trucked into Fairbanks and then loaded onto outbound flights. Everts also offers bulk fuel service on a charter basis.

Everts only operates DC-6 and C-46 aircraft. The DC-6 can land on paved, gravel and ice airstrips with a minimum runway length of 3,500 feet. The C-46 has similar specifications to the DC-6.

DC-6 Specifications

- All cargo configuration including oversize and Hazmat
- Payload capacity up to 28,000 lbs
- 4,200 to 4,400 cu ft capacity
- Loading door dimensions = 76 inches by 124 inches
- Interior floor dimensions = 65 ft long by 80 inches wide by 83.5 inches high
- Accommodates 28 to30 pallets

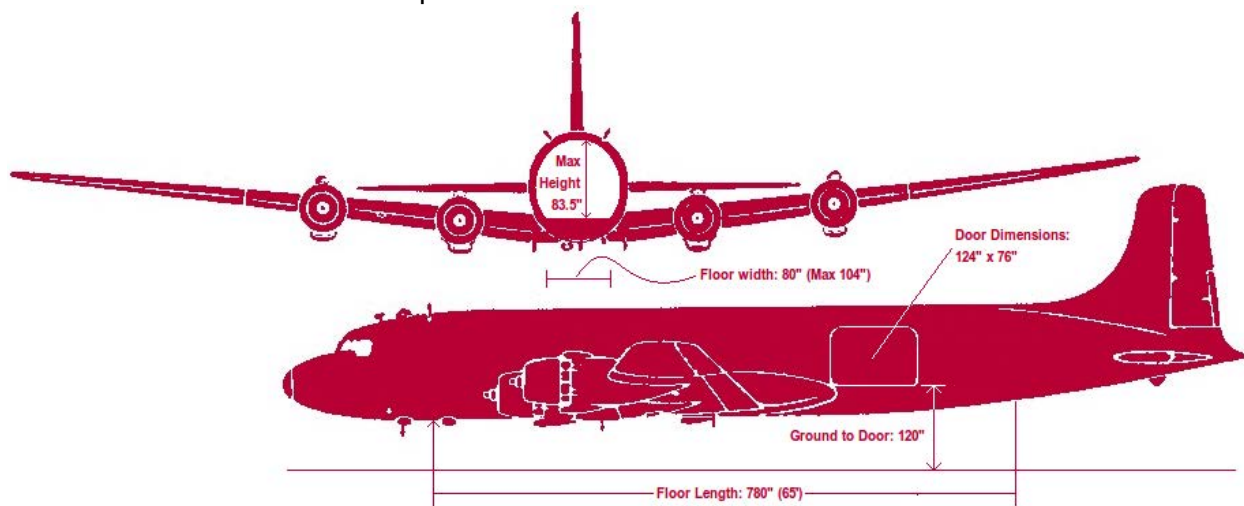

DC-6 Diagram

Lynden Air Cargo

The Lynden family of companies provides freight transportation via land, water or air or any combination thereof. Lynden's capabilities include truckload and less-than-truckload transportation, scheduled and charter barges, rail barges, intermodal bulk chemical hauls, scheduled and chartered air freighters, domestic and international air forwarding, international ocean forwarding, customs brokerage, trade show shipping, remote site construction, sanitary bulk commodities hauling, and multi-modal logistics.

Lynden Air Cargo headquarters are located in Anchorage, Alaska. Lynden offers charter and flagstop service to most locations including Barrow, Deadhorse and Wainwright. Scheduled service is limited, but is provided for Kotzebue. Lynden offers small package, general and priority service for scheduled and flagstop destinations.


Lynden operates the L-382 Hercules, capable of landing on packed earth, gravel, ice or short runways.



L-382 Hercules (photograph courtesy of Lynden Air Cargo)

L-382 Hercules Specifications

- Payload capacity up to 48,000 lbs
- 6,057 cu ft capacity
- Cargo hold of 54 ft long by 10 ft wide by 9 ft
- Bonus space over rear door with 4,000 lb load capacity
- Accommodates
 - five standard 88 inch by 125 inch pallets
 - a combination of 8 ft by 8 ft intermodal containers
 - oversize shipments equivalent to the cargo hold
- Straight-in loading through the rear-cargo ramp door
- Integrated winch and adjustable roller system for quick loading.

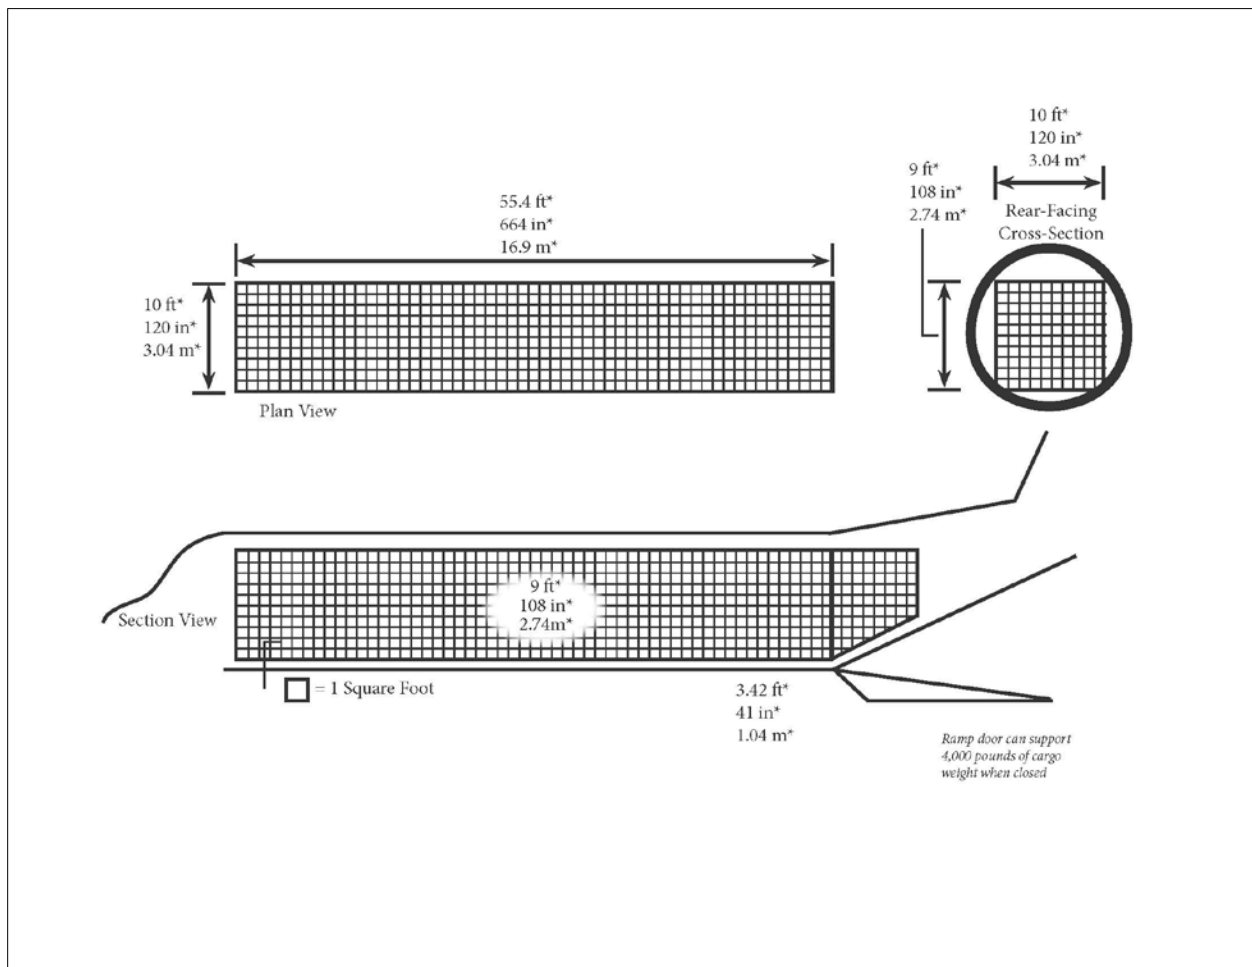

L-382 Hercules Load Planner Schematic

Northern Air Cargo

NAC, along with Totem Ocean Trailer Express and FOSS, are the Saltchuk Alaska-based companies providing both domestic and international multi-modal freight transportation. Similar to Lynden, the family of companies offers a broad range of freight services.

NAC has offices in Anchorage and Fairbanks with NAC agents available in Barrow, Kotzebue and Deadhorse. NAC provides scheduled service to Barrow, Deadhorse, Fairbanks and Kotzebue. Chartered service is available at most locations through the use of sister companies with smaller aircraft suitable for rural Alaska runways. NAC offers small package, general and priority service for scheduled and flagstop destinations.

NAC operates Boeing 737-200 jets that require state-maintained, paved runways over 5,000 ft for safe operations. The large cargo door permits oversized freight to be transported on scheduled flights.

Boeing 737-200 Specifications

- All cargo configuration for freight including oversize and Hazmat
- Roller deck flooring
- Payloads up to 30,000 lbs
- Accommodates pallets of 88 inches by 108 inches; and 88 inch by 125 inches
- Door dimensions = 81 inches by 134 inches
- Maximum floor length of 60 ft
- Floor width = 137 inches
- Maximum floor load intensity of 100 lbs/sq ft
- 4,000 cu ft capacity

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

TABLE OF CONTENTS

APPENDIX H RESPONSE OPERATING CONDITIONS AND LIMITATIONS H-1

H.1	OPERATIONS.....	H-1
H.2	METEOROLOGICAL CONDITIONS.....	H-1
H.3	PHYSICAL OCEANOGRAPHY	H-1
H.4	DISCUSSION REGARDING OPERATIONAL LIMITATIONS FOR RESPONSE EQUIPMENT	H-2
H.5	ADVERSE WEATHER CONDITIONS	H-6
	H.5.1 High Winds	H-6
	H.5.2 Temperature	H-7
H.6	SEA STATES, TIDES AND CURRENTS.....	H-8
	H.6.1 Sea State.....	H-8
	H.6.2 Tides and Currents	H-10
H.7	STRUCTURAL ICING	H-10
H.8	HOURS OF DAYLIGHT AND VISIBILITY.....	H-10
	H.8.1 Hours of Daylight	H-10
	H.8.2 Visibility.....	H-11
H.9	SEASONAL ICE CONDITIONS.....	H-11
	H.9.1 Breakup	H-12
	H.9.2 Response in Broken Ice.....	H-13
	H.9.3 Effectiveness of <i>In Situ</i> Burning in Open Water and in Ice	H-14
	H.9.4 Open Water with Current	H-14
	H.9.5 Open Water with Little or No Current	H-14
	H.9.6 Low to Moderate Ice Concentrations (With and Without Current).....	H-15
	H.9.7 High Ice Concentrations and Continuous Layers of New Ice in Early Winter..	H-16
	H.9.8 Very Close Winter Pack Ice (Greater Than 9/10 Concentration)	H-17

FIGURES

Figure H.9-1	Comparison of Regional Ice Conditions	H-13
--------------	---	------

TABLES

Table H.4-1	Ice Alert Levels	H-4
Table H.4-2	Ice Alert Roles and Responsibilities	H-5
Table H.5-1	Average and Maximum Wind Speeds	H-7
Table H.5-2	Percentages of Days per Month that Temperature Could Reduce Response Effectiveness for Worker Threshold Limit Values	H-8
Table H.6-1	Beaufort Wind Force and Sea State Relationship Between Wind and Wave Conditions in Fully Developed Seas.....	H-9

THIS PAGE
INTENTIONALLY
LEFT BLANK

APPENDIX H RESPONSE OPERATING CONDITIONS AND LIMITATIONS

H.1 OPERATIONS

Operations in the Chukchi Sea would begin with the drillship traveling to the Chukchi Sea accompanied by support vessels, including the OSR vessels. The vessels may arrive at the project location after July 1. The movement and positioning of the fleet is dependent on the timing and extent of breakup of the arctic sea ice. Project activities will commence after July 1 and continue into freezeup.

H.2 METEOROLOGICAL CONDITIONS

In general, meteorological and oceanographic conditions at the project location are moderate during the summer months. Winds are predominately from the ENE June through November with occasional low-pressure systems moving into the area from the western Pacific through the Bering Strait bringing warm air and moisture. Wet conditions producing fog and rain can result in periods of low visibility on the open ocean. Storms are more common during the winter months than the summer. The frequency of storms and associated high winds increase with the transition of open water season into the fall freezeup time frame. Severe storms generally originate from the SW, progress swiftly into the area, and last a relatively short time, although rough weather will on occasion persist for many days.

H.3 PHYSICAL OCEANOGRAPHY

The winter offshore ice in the Chukchi Sea is dynamic with the prevailing easterly winds across the northern Chukchi Sea frequently create an open water lead, or polynya, up to 30 mi (~50 km) paralleling the fast ice edge along the coast between Cape Lisburne and Point Lay. Breakup along the coast typically proceeds rapidly, changing from high ice concentration to open water in a few days. The timing of breakup is variable, ranging from early June to late July. Breakup tends to occur on the central coast one to three weeks earlier than at Point Barrow.

When drilling in water depths of 130 ft (~40 m) or more, the environment will be dominated by open water throughout the drilling season. In midsummer, the Chukchi Sea pack ice is typically composed of a mixture of broken, eroded blocks and small floes. The edge of the ice pack is irregular and usually remains well north of the proposed operational area in the summer months. Storm events can rapidly drive multiyear floes south at rates exceeding 7.5 mi/day (12 km/day). The fleet, consisting of the drillship and support vessels, would exit the exploration sites through the open water pathway before winter ensues and the pack ice encroaches on the shoreline.

The majority of Shell leases in the Chukchi Sea are located 60 n mi or more offshore. The waters of the Chukchi Sea begin just north of the Bering Strait and extend northward to the Arctic Ocean. The predominant current in the Chukchi flows northward and slightly eastward at 0.15 to 0.2 m/sec (0.3 to 0.4 knots).

The Chukchi Sea ice free or broken ice season typically extends from June through November/December. However, some portions of the Chukchi Sea are affected by sea ice all year, containing both seasonal first year ice and thicker multiyear arctic pack ice. Several smaller fresh water rivers including the Kobuk and Noatak Rivers empty into the Chukchi Sea. Annually, the waters of the Arctic go through variations in salinity. In the summer, waters are less saline than in the winter because of river inflow and ice melt. In winter, salinity increases

result from reduced fresh water inflow from river freezeup and brine rejection during ice formation (reaching as high as 34.5 ppt). In the eastern Chukchi Sea, Alaska coastal waters also flow along the coast incorporating cooler fresh water at speeds of 0.24 to 0.30 m/sec (0.5 to 0.6 knots) past Point Hope, Cape Lisburne, and Icy Cape (MMS 2007).

Tides in the Chukchi Sea are mixed semidiurnal and increase in range from 0.4 ft (0.1 m) at Barrow to up to 3 ft (1.0 m) in Kotzebue Sound. Fetch distances are significant with relative wave energy levels being consequently greater. The possibility of cross-boundary impacts on Siberian waters does exist.

Predominately, the Chukchi coastal character is composed of cliffs that make up about 249 mi (400 km) of the approximately 385 mi (620 km) of total shoreline between Barrow and Point Hope. Ice-poor tundra cliffs dominate the north with bedrock cliffs exposed south of Kasegaluk Lagoon. The lowland coasts are characterized by low, sand barrier beaches and spits.

H.4 DISCUSSION REGARDING OPERATIONAL LIMITATIONS FOR RESPONSE EQUIPMENT

The following provides a general discussion of the spill response limitations in the OCS waters of the Chukchi Sea.

Certain environmental conditions can sometimes limit the options for response and their overall effectiveness. Some limitations are based on safety and health, and others concern equipment effectiveness or access. The environmental and safety factors potentially impacting a spill response in the Chukchi Sea are primarily weather-related and include:

- reduced visibility and available daylight;
- wind and sea conditions;
- sea ice and structural icing; and,
- cold temperatures.

Generally, response effectiveness is not determined by any one single environmental factor or threshold. Environmental factors interact to compound response operating challenges. Operational efficiency also may be affected from these combined environmental factors. This complicates the task of setting distinct operational limits for each potential environmental factor. To achieve the most effective response, an assessment of on-site environmental conditions by trained response personnel is necessary to determine the operational strategy and tactics appropriate for the actual conditions encountered in the field. Personnel safety would always receive top priority during any spill response.

Environmental conditions that challenge the effectiveness of response operations may also impact drilling operations. Shell's Chukchi Sea COCP and IMP identify drilling restrictions during adverse weather that serve as prevention measures. The plans describe procedures for continuous weather surveillance and heavy-weather policies that aid drilling personnel in determining the correct procedures to follow when storm conditions are expected. Shell, consistent with the COCP, would evaluate the need to suspend operations during periods of adverse ice, weather, or sea states that significantly increase the likelihood of a release or severely hamper the ability to contain or control a release. Should it become necessary to cease critical operations, methods will be followed for securing the well and the drillship, ceasing drilling operations and hanging off the drillpipe. Critical operations will not recommence until it is deemed safe by the appropriate personnel. As part of that decision, the Shell Drilling Foreman will assess the risks associated with drilling, including:

- evaluating the forecast for weather conditions;
- fuel and water sustainability;
- safety of operations: type of operation needed, hazards, and the risks involved; and
- availability of emergency equipment.

The procedures for ice management include identifying the alert status and conditions of ice movement and the site-specific procedures for the support vessels. See Table H.4-1 (Ice Alert Levels) and Table H.4-2 (Ice Alert Roles and Responsibilities).

For discussion and details on response equipment operating in varying ice conditions refer to Appendix C (WCD Scenario), the Shell Tactics Manual (Tactics OR-2C, OR-2D, OR-4A, OR-4B, OR-5A, OR-5B, OR-7), and the ACS Technical Manual (Tactic L-7).

Timing and characteristics of the environmental conditions at Shell's Chukchi drill sites differ in a number of respects from the descriptions and dates under which many of the North Slope Operators function (as detailed in ACS Tactic L-7.) For example, this would include weather, sea conditions, ice, daylight hours, and other environmental conditions. Additional information on seasonal ice conditions in both nearshore and offshore areas is provided in Section H.6.

Under certain conditions, the use of dispersants or *in situ* burning would also be considered in conjunction with, or to augment mechanical recovery operations (Appendix D [Dispersant Use Plan] and Appendix E [*In Situ* Burning Plan]).

**Table H.4-1
 Ice Alert Levels**

ALERT LEVEL	TIME CALCULATION	ACTION
Green	(HT – T-Time) is greater than 24 hrs	Normal operations
Yellow	(HT – T-Time) is greater than 12 hrs but less than 24 hrs	Heightened awareness
Orange	(HT – T-Time) is greater than 6 hrs but less than 12 hrs	Limited well operations in line with COCP, possibly commence securing well
Red	(HT – MT) is less than 6 hrs	Secure well, disconnect riser and commence mooring recovery operations
Black	HT is less than 1 hr	Move drillship to a safe location

Definitions:

Ice Alert Level: The Ice Alert Level is a color-coded hazard category that depends on the time necessary to secure the well and to prepare the drillship to move to a place of safety in event of a confirmed hazardous ice incursion.

Hazard Time (HT): HT is the estimated arrival time, in hours, of hazardous ice at the drill site.

Secure Time (ST): ST is the time, in hours, required to cease drilling operations and temporarily abandon the well in a way that prevents leakage and make ready for departure of the drillship from location.

Move Off Time (MT): MT is the time, in hours, to disconnect from the subsea BOP, recover the riser, lower the marine riser package, safely store all items aboard the vessel, recover the moorings, and make the vessel ready to evacuate the site. The move off time varies depending on the method of anchor recovery, which in turn depends on changing environmental conditions. A very short MT can be achieved in an emergency by actuating the rig anchor releases (RARs) or by simply running the anchor lines off the winches, dropping the entire mooring system on the seafloor for later recovery.

Total Time (T-Time): T-Time is the sum of MT and ST, and represents the total time required to terminate drilling operations, safely secure the well and move the drillship off the drill site.

Hazardous Ice: Hazardous ice is any ice feature that is considered to be a threat to the continued safe operation of the drillship.

**Table H.4-2
Ice Alert Roles and Responsibilities**

Alert	Condition	Shell Drilling Foreman	Noble OIM	Marine Superintendent	Ice Advisor	Ice Pilot/ Ice Management Vessel Captains
Green	Hazardous ice is not expected to arrive at location within T-Time plus >24 hrs	Establishes potential well ST in conjunction with the VMT. Advises OIM and Noble Drilling Supt. regarding any critical operations and curtailment plans. Approves Ice Alert Level.	Monitors ice reports and forecasts, directs ice management operations. Determines Ice Alert Level in conjunction with VMT	Establishes potential MT	Monitors ice conditions and predictions, reports HT to the OIM and VMT, provides link to Ice Pilots for ice management vessel deployment and recon.	Conducts ice recon as directed by OIM through the IA, or designate, and reports to IA and IWC.
Yellow	Hazardous ice is not expected to arrive at location within T-Time plus >12 but <24 hrs	Monitors well operations relative to ice forecast. Establishes potential well ST in conjunction with the VMT. Advises OIM and Noble Drilling Superintendent regarding any critical operations and curtailment plans. Approves Ice Alert Level.	Monitors ice reports and forecasts, directs ice management operations. Determines Ice Alert Level in conjunction with VMT	Establishes MT	Monitors ice conditions and predictions, reports HT to the OIM and VMT, provides link to Ice Pilots for ice management vessel deployment, recon and ice management operations.	Conducts ice recon as directed by OIM, or designate, reports potential hazardous ice conditions and location to IA and IWC. Provides ops link from OIM to vessel Captain
Orange	Hazardous ice is not expected to arrive at location within T-Time plus >6 to <12 hrs	Approves Ice Alert Level. Establishes potential well ST and, if required, initiates well secure operations.	Determines Ice Alert Level with VMT. Monitors and controls ice operations.	Continuously updates all the potential MT. Ensures anchor handling and RAR capability.	Monitors ice conditions and predictions, reports HT to the OIM and VMT, provides link to Ice Pilots for ice management operations.	Supports ice management operations. Continues to provide ice data to IA and IWC. Assists in predicting HT.
Red	Hazardous ice is expected to arrive at location within MT plus < 6 hrs	Approves Ice Alert Level. Manages well secure operations and updates OIM on well status. Establishes availability of additional support for site departure operations.	Monitors ice conditions and directs ice management operations for return to drill site. Confers with the Drilling Foreman on course of action to be taken	Manages mooring recovery operations	Monitors ice conditions and predictions, reports HT to the OIM and VMT, provides link to Ice Pilots for ice management operations.	Supports ice management and anchor handling operations.
Black	Hazardous ice is expected to arrive at location within 1 hour	Approves Ice Alert Level. Confers with OIM and monitors ice conditions for return to drilling location. Prepares well reentry prognosis with Drilling Engineers, and reviews with BSEE Field Representative.	Monitors conditions for return. Confers with Drilling Foreman on the return Ice Alert Level and tentative timing.	Safely clears drilling location with the drillship. Prepares for return	Continues to monitor ice conditions, prepares new estimates of HT for any hazardous ice features, assist in establishing time to return to drill site.	Supports ice management, anchor handling, and towing operations. Conducts ice recon as directed, assists in estimating return time.

HT = Hazard Time
IA = Ice Advisor
IWC = Ice and Weather Information Center

MT = Move Off Time
OIM = Offshore Installation Manager
RAR = Rig Anchor Release

ST = Secure Time
VMT = Vessel Management Team

H.5 ADVERSE WEATHER CONDITIONS

BSEE regulations (30 CFR 254.23 and 30 CFR 254.26(d)) for an Oil Spill Response Plan require consideration of how a spill response would be managed during adverse weather conditions. The effectiveness of mechanical containment and response equipment and tactics may be impacted by extreme weather conditions. Activities at the drill site may be curtailed due to safety considerations. Temperatures below -35° F may cause failures in hydraulic equipment. Winds above 15 knots with 30-knot gusts are strong enough to make hoists and lifts unsafe 10 to 20 ft (3 to 6 m) above ground, with whiteouts restricting visibility to a few feet. Drill site activity may also be curtailed if crucial materials or supplies cannot be delivered. If conditions should arise that effectively prohibit the recovery or containment of an oil spill as per the USCG Marine Safety Manual and 30 CFR 254.23, the Shell Drilling Foreman will lead a risk assessment with the participation of the Toolpusher, location personnel and Shell Management. A joint decision is made by the VMT as to the level of risk in accordance with Shell's Chukchi Sea Ice Management Plan. Alternative response options, including but not limited to *in situ* burn and dispersant use, that can remain effective in some adverse weather conditions may be considered for use. Refer to Appendix D (Dispersant Use Plan) and Appendix E (*In Situ* Burning Plan) for discussion of these response options.

In general, meteorological and oceanographic conditions at the project location are moderate during the summer months of June through August. Winds are predominately from the ENE June through November with occasional low-pressure systems moving into the area from the western Pacific through the Bering Strait bringing warm air and moisture. Wet conditions producing fog and rain can result in periods of low visibility on the open ocean. Storms are more common during the winter months than the summer. The frequency of storms and associated high winds increase with the transition of open water season into the fall freezeup time frame. Severe storms generally originate from the SW, progress swiftly into the area, and last a relatively short time, although rough weather may on occasion persist for many days.

H.5.1 High Winds

Deployment of oil spill response equipment in the Chukchi Sea would not normally be limited solely by high winds. Chukchi winds on the whole are moderate (10 to 13 knots). Winds exceeding or 20 knots are less common and tend to occur predominately from October through March and near the coast. Extreme winds, recorded at the Barrow weather station for all months, may be directly attributed to the large fetch of the Arctic Ocean to the north, east, and west, as well as the lack of physical barriers and level tundra stretching 200 mi to the south.

The majority of Shell leases in the Chukchi Sea are located 60 miles or more offshore.. Table H.5-1 presents average and maximum wind speed values for the months June through November that were gathered by Shell within the lease vicinity. These data represent measurements for the period June to November of 1980, 1982, and 1983. Based upon these measurements, the aggregate and predominant offshore winds during the June through November season were NE to SE 54 percent of the time and NW to SW 23 percent of the time. Winds equal to or exceeding 15 knots occurred approximately 22 percent of the time and winds exceeding 30 knots were considerably less than 1 percent for the data collected.

**Table H.5-1
 Average and Maximum Wind Speeds**

MONTH	MAXIMUM SPEED (KNOTS)	AVERAGE SPEED (KNOTS)
June	21	9.6
July	25	9.9
August	25	11.5
September	36	13.3
October	32	13.1
November	34	15

Wind can impact mechanical response operations by hampering the ability of vessels to maintain position, limiting the ability of the crews to work on deck, impeding equipment and work boat deployment and retrieval, and may limit containment of oil within the boom.

Mechanical spill response equipment for the Chukchi Sea was selected for the variable conditions that may be encountered. The offshore/coastal boom and the skimmer systems may be deployed and operated in sea states associated with up to Beaufort Wind Force 6. The corresponding wind speeds for these sea states are up to 22 knots. Alternative countermeasures would be considered to extend response operations beyond these wind speeds.

Response efficiencies may also be dependent upon other compounding variables (e.g., temperature, sea state, or visibility) that may make the specific wind speed problematic. The wind-chill factor addresses safety concerns for personnel. Heavy clothing, while being the primary means of protecting personnel from the effects of wind chill, may also hinder the ability of personnel to work quickly and efficiently in cold weather.

H.5.2 Temperature

Lower temperatures affecting response efficiencies are compounded by several factors including: sustained (long-term) cold temperatures and wind-chill factor; icing on vessels and barge decks (structural icing); safety and efficiency of personnel; effectiveness of iced response equipment; and oil viscosity. Personnel safety is priority. Response operations will provide for personnel safety based upon the *Threshold Limit Values, Chemical Substances and Physical Agents and Biological Exposure Indices* (American Conference of Governmental Industrial Hygienists, Inc. 1994-1995) as per ACS Tactic L-7).

Considering temperature alone and based upon the number of average monthly temperatures below -20°F, response capabilities begin to be affected in November through April. Workers in temperatures below -25°F must take more breaks with time indoors. At temperatures below -45°F, all non-emergency work will stop. Table H.5-2 lists the percentage of days per month when the average monthly temperature falls below -20°F and response effectiveness may be reduced solely due to temperature.

**Table H.5-2
 Percentages of Days per Month that
 Temperature Could Reduce Response Effectiveness
 for Worker Threshold Limit Values**

JAN	FEB	MAR	APRIL	MAY	JUNE	JULY	AUG	SEPT	OCT	NOV	DEC
50%	64%	58%	17%	0%	0%	0%	0%	0%	0%	17%	42%

Based upon the averaged monthly minimum temperature data for Barrow, AK from <http://climate.gi.alaska.edu/climate/>

Temperature also affects the viscosity of oil, complicating recovery efforts. Shell is fully aware of the challenges of responding to spills during freezing temperatures and has selected equipment that addresses a wide range of variable operating conditions. This equipment is capable of recovering oil of typical viscosities as well as highly viscous, waxy, or emulsified oils.

H.6 SEA STATES, TIDES AND CURRENTS

H.6.1 Sea State

Rough seas may affect the ability to deploy equipment, boom and skimmer efficiencies, the ability of vessels to maintain position, the ability of crews to work on a vessel, and the ability to track and encounter oil.

Consideration must be given to both wave height and wave period when evaluating sea state and the effectiveness of spill response options. Short-period waves or chop has a greater effect than long-period swells. While personnel safety is the primary consideration, a response that is ongoing and working may continue to be effective in long-period swells up to a Sea State 5 up to about 10 ft (3 m) in height correlated to a Beaufort Wind Force 6 (22 to 27 knots). Based upon measurements collected by Shell for the years 1980, 1982, and 1983, winds exceeding 22 knots occurred approximately 17 percent of the time. The effects wind speed and open water fetch on sea state are dampened with the onset of ice in November. Table H.6-1 summarizes the relationship between the Beaufort Wind Force, sea state, and wind and wave conditions.

The compounding influence of other environmental factors together with sea state can only be evaluated on a case-by-case basis. Alternative response methods, from both aerial and vessel-based platforms, may continue to be used beyond this sea state.

**Table H.6-1
 Beaufort Wind Force and Sea State
 Relationship Between Wind and Wave Conditions in Fully Developed Seas**

BEAUFORT NUMBER	WIND SPEED			WIND FORCE	SEA SURFACE	SEA STATE	HEIGHT (m)
	knots	mph	kph				
0	< 1	< 1	< 1	Calm	Calm	0	0
1	1-3	1-3	1-5	Light air	Ripples with the appearance of scales; no foam crests.	0	0
2	4-6	4-7	6-11	Light Breeze	Small wavelets; crests of glassy appearance, not breaking.	1	0-0.1
3	7-10	8-12	12-19	Gentle Breeze	Large wavelets; crests begin to break; scattered whitecaps.	2	0.1-0.5
4	11-16	13-18	20-28	Moderate Breeze	Small waves, becoming longer; numerous whitecaps.	3	0.5-1.25
5	17-21	19-24	29-38	Fresh Breeze	Moderate waves, taking longer form; many whitecaps; some spray.	4	1.25-2.5
6	22-27	25-31	39-49	Strong Breeze	Larger waves forming; whitecaps everywhere; more spray.	5	2.5-4
7	28-33	32-38	50-61	Near Gale	Sea heaps up; white foam from breaking waves begins to blow in streaks.	6	4-6

Adapted: (<http://www.psych.usyd.edu.au/vbb/woronora/maritime/beaufort.html>)

kph = kilometers per hour

Storm surges are coastal phenomena and can depend not only upon the storm characteristics, but also on the topography onshore and bathymetry offshore. The characteristics of a storm that affect the surge height include atmospheric pressure, wind speed and direction, as well as the storm's direction and speed. Storm surges are greater when air temperature is colder than the water and the sea has little ice cover, providing a long fetch to generate waves and swells. The area from Point Lay to NW of Barrow is generally of low relief and the offshore ocean floor is gently sloping. When the waters of the Chukchi are ice-free (July to October/November), storms from the W or SW may result in surges up to 10 ft (3 m) along this section of the coast. Surges of 6 to 10 ft (2 to 3 m) are projected to be 10-year events (Brower et al. 1988).

Storm surges in themselves are not expected to affect offshore drilling or response operations. However, the high winds and sea states associated with these storms may hamper offshore response operations. Shell, consistent with the COCP, will evaluate the need to suspend operations during these conditions.

H.6.2 Tides and Currents

The tides in the Chukchi Sea are semidiurnal ranging from 0.3 ft to 2.5 ft (0.1 to 0.8 m) and generally would have negligible influence on offshore response efforts. However, strong coastal currents may affect shoreline protection strategies or cleanup efforts through the impact to boom effectiveness and the ability of vessels to maintain station.

Currents in the Chukchi Sea typically range from 10 to 30 cm/sec (0.2 to 0.6 knot). Because open water currents occur over a broad area, the entire response system would be relatively affected as a whole; therefore, the system would not be impacted unless localized eddies or tidal rips occur. Schematics of the Chukchi Sea currents may be found on the Unified Plan, Subarea Plan Web site at <http://www.asqdc.state.ak.us/maps/cplans/base/AK-Circ.pdf>.

H.7 STRUCTURAL ICING

The primary concern for structural icing in the Chukchi Sea is from sea spray. Structural icing of ships or drilling facilities is a concern in open water and coastal areas. Icing may cause hazards to personnel (e.g., slippery work surfaces such as decks or railings, moveable parts become inoperable because of icing). Environmental conditions that may cause significant spray icing are water temperatures less than 46°F, winds of 25 knots or more, and air temperatures less than 28°F. From December to June in the Shell lease area, structural icing has a very unlikely possibility of impacting response operations because of a fairly complete sea ice cover. Structural icing becomes a concern as breakup occurs in June. By July, the air temperature has warmed enough that only light to moderate superstructure icing is a concern. By August the temperatures begin to cool and the possibility of icing increases in the northern part of the Chukchi Sea. Structures from the pack ice edge to Cape Lisburne are most likely to be at risk in September (Brower et al. 1988).

Based upon Shell's accumulated wind data for the months of June through November, winds recorded over 25 knots or more occurred just under 3 percent of the time. This same value may be extrapolated to the possibility of structural ice occurrence for the months of June through November. However, this value does not reflect the amount of time that structural icing will result in unsafe ice accumulations that could affect both drilling or response operations. Vessels may take evasive action to avoid the accumulation of an excessive amount of ice by either heading directly into the wind or heading downwind (Brower et al. 1988). Ice accumulations may also be mitigated by mechanical removal. Drilling operations shall be managed under the provisions of the COCP.

H.8 HOURS OF DAYLIGHT AND VISIBILITY

H.8.1 Hours of Daylight

Visibility can be hampered by several environmental factors including fog, snow, heavy precipitation, or low clouds. If wind, sea state, temperature, visibility and/or precipitation result in the reduction of response efficiencies, the additional factor of darkness may further complicate efforts to track and encounter oil and may limit flight operations.

In Barrow, the sun does not set between May 10 and August 2 in summer, and does not rise between November 18 and January 24 in winter. From January 24 to May 10, daylight increases each day by not less than 9 minutes. By May 10 daylight has increased to 24 hrs/day. The sun remains visible from that time to August 2, when it again sets for 1 hour and 25 minutes. By September 1 there is just over 15 hours of daylight and by October 7 there is just

10 hours of daylight. Daylight hours decrease at the same rate as the increase (<http://climate.gi.alaska.edu/Stations/Arctic/Barrow.html>).

As the daylight hours diminish, visual aids shall be employed to continue open water response. Operations will continue by using lighting on booms, skimmers, and vessels. Buoy tracking systems, strobe lights, and infrared systems will be used to track oil in open water recovery efforts. On land, the use of portable lighting or infrared will be used to locate oil and assist recovery operations during periods of darkness.

H.8.2 Visibility

The increase of daylight also parallels the occurrence of cloudiness, precipitation, and heavy fog. All three build up to a maximum concurrent with the increased hours of daylight. Annual precipitation is light, averaging 5 inches (12 cm) (<http://climate.gi.alaska.edu/Stations/Arctic/Barrow.html>), and summer season pressure patterns are variable. June through August, the occurrence of reduced visibility on the open sea ranges from 25 to 30 percent. This is primarily from a high frequency of fog generated from Western-Pacific low-pressure systems that move northeasterly through the Bering Sea into the Chukchi Sea and along the Alaskan coastline.

For booming and skimming vessels, the visibility limitation varies between 0.125 and 0.5 n mi (200 to 800 m), depending upon temperature, sea state, wind, and precipitation. The operational limitation for visibility depends upon whether response vessels are already recovering oil. For vessels actively booming and skimming oil, the operating limits would be set by the master of the vessel based on safety and operational efficiency. When vessels require aircraft assistance to locate recoverable slicks, the limitations would likely be for the aircraft. A realistic maximum response operation, based solely on hours of daylight, could only be determined on a case-by-case basis. Depending on other environmental factors, the visibility of less than 0.5 n mi (800 m) presents challenges for vessels tracking oil. Response efforts would continue below this level using the same tools that are employed for nighttime operations (e.g., lighting on booms, skimmers, and vessels) as long as it is safe to do so. Buoy tracking systems, strobe lights, and infrared systems will be also used to track oil in open water recovery efforts.

In the event of adverse weather, flight limitations caused by adverse ceiling and visibility combinations may restrict offshore operations and response. Customary North Slope standards for flight surveillance operations, based on VFR for rotary- and fixed-wing aircraft are:

- 500-ft (152-m) ceiling and 1 mi (1.6 km) visibility if in sight of land, or
- 500-ft (152-m) ceiling and 3 mi (4.8 km) visibility if over open water and land is not in sight.

H.9 SEASONAL ICE CONDITIONS

Sea ice can present a significant challenge for encountering oil with mechanical recovery equipment; however, ice also can provide natural containment of oil, and cold water temperatures can inhibit evaporation and weathering, thus extending the window of opportunity for mechanical recovery and *in situ* burning when the oil becomes accessible as the ice concentration or cover lessens.

The start of on-site project activities will begin after July 1 which coincides with the retreat of the ice in most years (early June to late July). The duration of open water ($\leq 1/10$ ice concentration) in the central Chukchi Sea has lengthened by up to four weeks over the past 30 years to a summer average of 17 weeks. However, the range of open water is variable from year to year

and ice could be present at the drill site. An Ice Management Plan will be implemented to ensure safe operations at all times. Exploration drilling will conclude by October 31. Other project activities will conclude with freezeup, which historically varies from late October to mid-December.

In the Chukchi Sea, frequent “break-away” events of landfast ice can substantially alter the extent of the nearshore solid ice in a matter of hours. Freezeup at the shoreline in this region is highly variable with first new ice appearing as early as the first week in October and as late as the end of November. The inter-annual variability at a given coastal location is greater than the average north-south difference in timing of first ice (for example, comparing Wainwright and Barrow). Historically, the average freezeup dates at these two locations have differed by less than a week.

Important ice characteristics in this area (first-year ice thickness, multiyear ice occurrence, and open water season duration) are related strongly to latitude. The winter offshore ice cover is highly dynamic in response to wind and current driving forces and the nearshore fast ice tends to be unpredictable in extent and stability.

Prevailing easterly winds across the northern Chukchi Sea often create an open water/thin ice “flaw” lead or polynya paralleling the fast ice edge. The broadest extent of this zone [up to 30 mi (~50 km) out from the coast] occurs between Cape Lisburne and Point Lay an average of 65 percent of the time in the winter. The lead increases in frequency and extent after April. However, in extreme cases, sustained westerly winds can prevent the lead from opening in late winter and maintain the pack ice along the coast until mid or late summer. Figure H.9-1 provides an overview of general regional ice conditions in the Chukchi Sea.

H.9.1 Breakup

Breakup along the central coast (vicinity of Wainwright) tends to be short-lived with ice concentrations dropping from close to complete cover at the shore to open water within a 5- to 10-day window. The timing of breakup at the coast is highly variable with historic dates over the past decade ranging from early June to late July. Breakup in the Wainwright area tends to occur between one and three weeks earlier than at Point Barrow.

Breakup offshore (defined as first date with less than 9/10 ice coverage) spanned a two-month period of variability over the past 12 years, from mid-May to mid-August in the extremes. In most years (10 out of 12) the range in timing of initial breakup fell between early June and late July. The period of intermediate concentrations (2/10 to 8/10) tends to be very short with the transition from close to complete ice cover to open water occurring within one week in every year examined.

**Figure H.9-1
 Comparison of Regional Ice Conditions**

Region	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
Chukchi Offshore	[Fast ice pattern]						Open Water (1/10 or less)			[Very open to open drift ice pattern]		
Chukchi Nearshore	[Fast ice pattern]					[Close to very close pack ice pattern]		[Predominantly open water or ice up to 1/10 conc. pattern]			[Fast ice pattern]	
LEGEND												
[Fast ice pattern]	Fast ice: 1.6 to 1.8 m max, edge 5-15 m early winter/20-30 m late winter											
[Close to very close pack ice pattern]	Close to very close pack ice or fractured fast ice: 7-9/10 conc.											
[Very open to open drift ice pattern]	Very open to open drift ice: 1-6/10 conc., slush between floes at freeze-up											
[Predominantly open water or ice up to 1/10 conc. pattern]	Predominantly open water or ice up to 1/10 conc.											

There is extreme variability in the timing of breakup and freezeup in the Chukchi Sea. Summer ice conditions are highly variable from year to year. For example, the duration of the summer open water period ranged from 8 to 24 weeks, reflecting the variability in breakup and freezeup dates. A record year of ice retreat in 2005 was followed by a late developing summer in 2006 and then a dramatic new record for minimum ice cover in the Chukchi region in 2007.

Over the past 12 years (1996 to 2007) the onset of freezeup (first appearance new ice) in the vicinity of the previously drilled Burger prospect occurred between early October and the third week of November. The offshore transition period from very open drift ice to 9/10 or more ice concentrations is highly unpredictable, taking anywhere from one week to a month. Nearly complete ice cover has covered the area offshore of Wainwright as early as October 22 and as late as December 11 (1996 to 2007).

H.9.2 Response in Broken Ice

Ice may serve to reduce oil spreading and concentrate oil into thicker pools for more effective recovery or use of *in situ* burning or dispersant countermeasures. Recovery techniques in broken ice conditions would be similar to those employed during an open water response, such as locating pockets of oil contained by ice for skimming or burning. As freezeup begins and ice concentrations beyond 10 percent develop, various techniques and equipment that can be used to respond include managing drift ice by deflection to sustain or create open water pockets for skimming, releasing ice accumulations within containment boom, strategically recovering oil that concentrates in pockets between ice floes, and the potential to use alternative countermeasures such as *in situ* burning to augment mechanical response techniques when ice concentrations limit or preclude recovery options.

As offshore ice becomes too concentrated or dynamic to mount any significant mid-winter on-ice recovery operations, mechanical response options become more targeted. The response scenario (Appendix C, WCD Scenario) illustrates the recovery and treatment methods that can be used when conditions preclude the use of conventional boom for capturing oil and directing it to a skimming devise. Tracking buoys and satellite monitoring are employed to track the movement of potentially oiled ice. As ice encapsulates oil, the location can be marked and tracked for removal when the ice is safe to work on, or the oil could be tracked until spring. During breakup the following spring, response efforts would continue.

H.9.3 Effectiveness of *In Situ* Burning in Open Water and in Ice

The consensus of research regarding *in situ* burning of oil on open water and with ice is that burning is an effective technique with removal rates of 85 to 95 percent in most situations (Shell et al. 1983; S.L. Ross 1983; S.L. Ross and D.F. Dickins 1987; Allen 1990; Allen 1991; Allen and Ferek 1993; Singsaas et al. 1994). Results of considerable research have demonstrated the success of *in situ* burning in broken ice. The research includes several smaller-scale field and tank tests (S.L. Ross et al. 2003; Shell et al. 1983; Brown and Goodman 1986; Buist and Dickins 1987; Smith and Diaz 1987; Bech et al. 1993; Guénette and Wighus 1996) and one large-field test (Singsaas et al. 1994). Most of the tests involved large volumes of oil placed in a static test field of broken ice resulting in substantial slick thicknesses for ignition. Tests in unrestricted ice fields or in moving ice have indicated that the efficacy of *in situ* burning is sensitive to ice concentration and dynamics and thus the tendency for the ice floes to naturally contain the oil, the thickness (or coverage) of oil in leads between floes, and the presence or absence of brash or frazil ice which can absorb the oil.

The following information addresses the practicality of burning in open water and with varying concentrations of ice while recognizing the effect that current (primarily wind-driven) could have upon the distribution of oil and, therefore, the feasibility of collecting and igniting the oil.

H.9.4 Open Water with Current

The initial distribution of the surfacing oil droplets in open water could involve a surface area with a diameter of several hundred meters. The outer reaches of this area would involve a relatively small percentage of the total blowout release as the largest droplets would surface more quickly near the center and the smallest droplets would rise more slowly, riding with the induced currents to the outer regions of the slick. Authorization for ignition of the gas cloud directly over the blowout would normally be requested as early as possible to avoid any risk of exposure to personnel on location and any accidental ignition that could expose personnel and equipment to fire.

Burning of the oil in this situation would require containment or deflection with boom to concentrate and thicken the oil while it is relatively fresh without emulsification. Towed open-apex boom configurations could be used downstream of the blowout to thicken and release concentrated bands of oil into fire boom being towed in a U-configuration. Once such fire booms reach their holding capacity, they could be moved a safe distance from the open-apex, where ignition and sustained combustion could be quite successful. While burning the contained oil, a second fire boom could be positioned downstream of the open-apex to collect oil for a second burn. The elimination of oil at the first boom could easily be completed in time to relieve the second collection effort before the fire boom reaches its holding capacity.

H.9.5 Open Water with Little or No Current

Should oil and gas be released from the seabed with little or no current, it is likely that authorization would have been secured (as in the previous scenario) to ignite the free gas directly over the blowout to avoid harmful exposures to personnel and any accidental ignition of the gas plume. Without current to carry surfaced oil away from the blowout, there would be an accumulation of oil droplets at the surface allowing for the build-up and re-coalescence of those droplets into a layer that could support combustion. In this case, it is likely that the heat generated by the burning of free gas would be sufficient to ignite vapors from the surfacing oil, thereby enlarging the burn area and removing a substantial portion of the blowout.

However, the efficiency of removal by burning could be improved if it was safe to deploy fire boom in a U-configuration at and immediately downstream of the surfacing oil and gas. The positioning of fire boom in this mode could be carried out safely if there was at least a light wind and/or a slight current that could carry the burning oil back into the apex of the U-configuration. Two boom-towing boats could be positioned well upstream of the surfacing oil and gas (using longer than normal tow lines) at a distance that would preclude any unsafe exposure to heat and smoke from the fire. Effective burning could be conducted without personnel, boats and boom when the surfacing oil is held naturally at and near the spill source. In fact, the heated air rising above the blowout would produce a thermally induced wind along the surface working radially inward toward the fire. Even a very light breeze of this kind could help reduce spreading of the oil and maintain oil thickness for improved combustion. If currents less than 1 knot and/or light winds were available to move the burning oil away from the source, boom-tending boats could work at a safe distance from the burning source, and substantially improve the efficiency of burn.

H.9.6 Low to Moderate Ice Concentrations (With and Without Current)

Even at relatively low ice concentrations ($\leq 2/10$), the effectiveness of conventional or fire booms may be reduced (depending upon the size and distribution of the ice pieces) for the collection of oil. If the distribution of ice is such that ice could not be avoided or deflected away from the opening of a boom configuration, then ice could accumulate in high concentrations within the boom. However, low ice concentrations are often present as discontinuous wind-consolidated strips separated by broad open water areas that limit use of boom to capture oil. In more scattered ice concentrations, responders could access oil at low speeds and encounter rates between ice floes. At such low ice concentrations, there are times when burning could be conducted with fire boom.

Should broken ice (from as little as 2/10 to 3/10 to as high as 7/10 to 8/10 concentrations) move into and over the blowout, the ice could actually help in a number of ways. The ice would tend to dampen waves, reduce surface spreading radially over the blowout, and promote re-coalescence of the surfacing oil droplets in the reduced water surface between ice cakes or floes. Under these conditions there would be an increased potential for the accumulation of oil on water at thicknesses that could support sustained combustion.

As long as the ice concentrations do not become excessive (greater than 8/10 to 9/10) and/or the ice comes under pressure, there should remain sufficient oil-on-water area to support combustion. Also, as in the previous open water scenarios, if water movement over the blowout drops to little or no current, the increased accumulation of oil between ice floes would only enhance the overall efficiency of burning. Induced radial currents over, and adjacent to the blowout may prevent much of the oil from sticking to the underside of ice cakes and small floes. Therefore, most oil would be exposed for combustion while it is fresh and relatively free of emulsification. Should the natural floes be large enough to entrap some of the oil beneath them and keep the oil from surfacing, efforts could be initiated with ice management vessels at a safe distance upstream of the blowout to break such ice into smaller pieces or deflect large floes away from the blowout.

Ice management is a proven technique that can completely modify the composition of the ice moving over a drilling location. For example, a 2004 coring program at 88°N saw two ice management vessels successfully work to maintain a drillship on location in high concentrations of 7 to 9 ft (2.1 to 2.7 m) ice thickness. Floes drifting towards the drill site were over 3,000 ft (914 m) in diameter. By the time they arrived the ice management vessels had reduced the average ice piece size to between 35 and 43 ft (10.6 to 13.1 m) (Keinonen et al. 2006). In

addition to managing the floe sizes, oil could be dislodged from the underside of ice (before it becomes encapsulated within the ice) using prop-wash from vessels on location.

Another approach that could enhance combustion of oil with moving ice concentrations involves the use of large ice-deflection barriers such as a barge with tug assist or a vessel with dynamic positioning. Shell has conducted extensive mathematical and ice-tank modeling efforts to show that such large-scale deflection of ice appears safe and feasible for the creation of a relatively ice-free surface downstream of the deflection operation. Pending the results of full-scale trials with ice, it is likely that moving broken ice and early freezeup ice (new ice, nilas) could be deflected with a barge or vessel positioned sideways to the current/ice flow. Temporary paths of relatively open water several hundred feet wide could be created downstream of the deflection system to facilitate the use of conventional containment and recovery tactics and/or the use of fire boom in a conventional burn mode.

H.9.7 High Ice Concentrations and Continuous Layers of New Ice in Early Winter

The movement of a continuous layer of new ice or very high ice concentrations over a subsea blowout could reduce the effective use of *in situ* burning. There could be a reduction in the air/water surface area to accumulate oil and allow for efficient sustained combustion. This could be remedied in two ways: one involving the natural processes, and the other involving ice management. Experience has shown that large gas accumulations beneath ice will accumulate and rupture continuous ice layers (Dickins and Buist 1981) during early freezeup. The ice would likely break up, move out and away from the blowout, rafting and accumulating to create a natural barrier within which burning of the oil and free gas could take place. The other remedy involves the use of large ice-deflection systems upstream of the blowout as described above. Such deflection would provide an opening for burning on ice until prevented by excessive ice thickness. If the ice was continuous (even at relatively thin layers such as 3 to 6 inches) tank-test results suggest that it would be necessary to use ice management vessels forward of the deflection system. As long as the ice could be broken, and not too thick or pressured, it is possible that a relatively ice-free path could be opened just forward (or upstream) of the blowout. Oil (even widely scattered particles) surfacing within the cleared path downstream of the deflection system would soon be trapped within the downstream opening bounded on each side by ice. Even if bounded by broken ice and slush, these “walls of ice” would help contain and limit the spread of oil. The ice boundaries would provide considerable natural containment for the oil and enhance the potential and efficiency of elimination by burning.

As the ice boundaries continue to collapse inward on the cleared path of nearly open water, any contained oil would build in thickness, improving its condition for sustained and efficient combustion. Burning could occur in that ice-contained pocket as it moves away from the blowout. If the blowout was sufficient in flow rate and/or the currents were low, the buildup of oil at and immediately downstream of the blowout could be thick enough to support an ongoing efficient elimination of oil.

If conditions made it impossible or impractical to use the ice-deflection system, oil could surface beneath the continuous or solidly packed ice field where it would quickly become immobilized at the ice/water interface. If left undisturbed, new ice growth would soon provide a “lip” around the oil (typically within hours to a day, depending upon air temperature and ice thickness) further ensuring that the oil would not migrate out over a larger area. Typically within a day or two, new ice would completely surround the oil, encapsulating, immobilizing and preserving the condition of the oil. The ice-encapsulated oil can be marked and tracked for removal when the ice is safe to work on, or the oil could be tracked until spring. At that time the oil would become exposed at the surface through brine-channel migration or through surface melt down to the small

entrapped oil droplets. The location and “mining” of oil from solid ice continues to be tested and enhanced; and, as long as it is safe to access the oiled ice by helicopter, these tactics could be implemented throughout most of the winter months. Of equal importance is the success with which oil has been burned after surfacing into melt pools in the spring. The elimination of evaporation, emulsification and other weathering phenomena while the oil is frozen within the ice, makes it possible to burn the exposed oil safely and efficiently using well-established aerial ignition techniques.

Still another tactic during this early freezeup phase involves the use of vessels to break the newly formed ice with oil under it, or about to be encapsulated within it. By breaking the ice and using the vessel’s prop-wash to dislodge oil from below the ice, oil can be flushed to the surface and trapped on or between pieces of ice. If there is sufficient oil present, the oil could be ignited and burned.

H.9.8 Very Close Winter Pack Ice (Greater Than 9/10 Concentration)

There is the possibility that an incursion of older, multiyear ice could move in over a subsea blowout, and that a blowout could continue into the winter months exposing it to mix of growing first-year and multiyear ice. While highly unlikely, this scenario could involve the deposition of oil and gas beneath the closely packed ice floes. Depending upon the ice thickness and the volume of gas released with the blowout, the ice cover could fracture, thereby exposing both oil and gas at the surface. Depending upon the current and the rate of ice transport over the blowout, the rupturing of the ice could provide sufficient oil/gas exposure to support combustion. Previous studies of the possible effects of gas bubbles under the ice concluded that ice rupturing and gas/oil venting was likely with ice sheets up to three feet thick (Dickins and Buist 1981).

In this situation, it might be possible to keep some of the larger ice management vessels on location until it is no longer feasible to physically break the ice forward and/or downstream of the blowout. Between natural rupturing of the ice (gas lift) and deliberate breakup with ice management vessels, every effort would be made to entrap oil at or near the surface for immediate combustion or for enhanced combustion later during breakup.

As in the previous scenario with high ice concentrations, mid-winter response could (if it is safe to access the oiled ice) involve the location and recovery of oil using on-ice “mining” techniques. Promising results of tests with Ground Penetrating Radar and other remote-sensing systems could lead to the development and refinement of detection and tracking techniques for oil that is trapped deep within a thick ice layer (Dickins et al. 2006). Should the location and removal of oil be impractical during the winter months, oil deposited beneath and trapped within the ice in this way could be dealt with (as described above) when it becomes naturally exposed in the spring/summer period.

THIS PAGE
INTENTIONALLY
LEFT BLANK

TABLE OF CONTENTS

APPENDIX I	WILDLIFE RESPONSE PLAN	I-1
I.1	INTRODUCTION.....	I-1
I.2	WILDLIFE RESPONSE PLANNING MEASURES	I-2
I.2.1	Wildlife Risk Assessment.....	I-2
I.2.2	Wildlife Reconnaissance.....	I-2
I.2.3	Wildlife Hazing	I-3
I.2.4	Wildlife Recovery and Care.....	I-5
I.3	WILDLIFE RESPONSE STRATEGIES.....	I-9
I.4	MIGRATORY BIRDS.....	I-9
I.5	MARINE AND TERRESTRIAL MAMMALS.....	I-12

TABLES

Table I.2-1	State and Federal Permits and/or Authorizations Required for Hazing, Collecting, or Holding Live Animals.....	I-4
Table I.4-1	Migratory Birds.....	I-10
Table I.5-1	Marine Mammals	I-14
Table I.5-2	Terrestrial Mammals	I-14

ATTACHMENTS

Attachment I-1	Wildlife Response Contact List.....	I-15
Attachment I-2	Facilities and Permit Applications.....	I-17
Attachment I-3	Polar Bear Interaction Measures.....	I-43

THIS PAGE
INTENTIONALLY
LEFT BLANK

APPENDIX I WILDLIFE RESPONSE PLAN

I.1 INTRODUCTION

This WRP has been developed by Shell in order to provide for coordinated, immediate, and effective protection, rescue, and rehabilitation of (and minimization of risk of injury to) wildlife resources present in the Chukchi Sea region during Shell's Chukchi Sea Exploration Drilling Program. The WRP includes general planning considerations, response strategies, specific protocols, and key resources to guide oil spill response operations in providing protective measures for migratory birds (including waterfowl, seabirds, shorebirds, and raptors), marine mammals, and terrestrial mammals. Species lists for migratory birds, marine mammals, and terrestrial mammals provide population densities for species commonly found in the Chukchi Sea or at onshore locations. The plan incorporates standards established by ACS in their Technical Manual and the ARRT Unified Plan, Annex G – Wildlife Protection Guidelines for Alaska (revised October 2012). These plans serve as the foundation for Shell's WRP and are referenced throughout this document.

Shell's principal wildlife response objectives are to:

- Provide best achievable protection to wildlife and habitats from releases;
- Minimize injuries to wildlife and habitats from releases;
- Minimize injuries to wildlife from the cleanup operations;
- Provide best achievable care for injured wildlife;
- Document adverse effects that result from the release and cleanup; and
- Prevent injuries to responders and the public.

In addition, techniques will be used to specifically prevent: (1) unnecessary or illegal disturbance to sensitive species and habitats such as marine mammal haulouts; (2) potential injury and/or disturbance of bears by spill-related response personnel; (3) illegal collection of wildlife parts by spill-response personnel; and (4) wildlife contacts with spill response treatments. Although the precise techniques need to be identified on a spill-specific basis, general suggestions to minimize adverse effects to wildlife from response activities are provided in Sections 301.B.1 and 302.B.1 of the Wildlife Protection Guidelines for Alaska.

As presented in this WRP, these objectives are achieved through the implementation of primary, secondary, and tertiary response strategies. During oil spill response operations that have the potential to affect migratory birds and marine mammals, the primary response strategy is to control the release and spread of spilled oil at the source to reduce impacts to wildlife and their habitats. In addition, the primary response strategy includes the removal of oiled debris, particularly contaminated food sources (such as dead wildlife carcasses) both in water and on land. With the approval of the appropriate wildlife resource agency and FOSC, and consideration of the welfare of the animal, secondary response techniques (e.g., such as herding and deterring) would be employed to prevent the oiling of animals. The tertiary response during response operations is to attempt to capture and treat oiled birds and mammals.

Response actions concerning the protection, identification, rescue, processing and rehabilitation of oiled wildlife or wildlife at risk will be performed by the Wildlife Branch (sometimes referred to as Wildlife Operations), a branch in the Operations Section within the ICS. Shell maintains a Wildlife Response Contact List (see Attachment I-1) which is updated on a regular basis.

I.2 WILDLIFE RESPONSE PLANNING MEASURES

Wildlife response activities are conducted within four main categories: (1) Wildlife Risk Assessment, (2) Wildlife Reconnaissance, (3) Wildlife Hazing, and (4) Wildlife Recovery and Care. The planning measures associated with these activities are discussed below. These activities are fully integrated with Shell's OSRP.

I.2.1 Wildlife Risk Assessment

A comprehensive Wildlife Risk Assessment will be critical to a successful wildlife response, and will help determine the magnitude and nature of staffing and equipment needs. A Wildlife Risk Assessment includes a variety of wildlife resource information including potentially affected species, estimated species distribution, habitat types, spill trajectory, and preliminary hazing or treatment options.

The Wildlife Risk Assessment is best performed by trained biologists with support from locals with Traditional Knowledge of the species affected, such as subsistence hunters. Because wildlife concentration areas may change based on weather and season, this input may require direct reconnaissance by trained biologists (see Section I.2.2). Although objectives and strategies are clearly identified in this plan, priority actions and tactics must be decided on the basis of an incident-specific Wildlife Assessment.

I.2.2 Wildlife Reconnaissance

Baseline information on the status and distribution of wildlife and sensitive habitats are important in assessing Resources at Risk and developing appropriate response actions. This information is available during a spill response from the Environmental Unit of the Planning Section (Resources at Risk Specialist). However, variations from historic baseline conditions, due to daily and seasonal movements of birds and mammals, necessitates rapid, real-time reconnaissance of wildlife concentrations in the spill area. Depending upon the size and type of the spill and the habitats involved, real-time data will be collected using aircraft, boat, and/or ground surveys. Reconnaissance activities should begin immediately, as appropriate, upon notification of a spill event.

The main objectives of wildlife reconnaissance surveys are to evaluate the numbers, species, and locations of animals that could be or have been impacted by a spill. This information will be used to help direct wildlife hazing and/or recovery efforts, will be used by the Planning Section to develop response strategies that minimize adverse effects on wildlife, and will keep the UC informed regarding potential impacts.

Experienced personnel are essential for effective wildlife reconnaissance. Observers should be able to identify species, behavioral characteristics, and be knowledgeable about local ecological factors. At a minimum, personnel conducting wildlife reconnaissance should be experienced at identifying species of marine mammals and birds and be able to determine at a distance whether a live animal is oiled.

Vessel-Based Marine Mammal Observation

During a response operation, PSOs positioned on vessels to monitor for marine mammals could be a resource to provide professional guidance in species identification. The PSOs have been trained in the identification of marine mammals, estimating the number of animals in a group, and general distance calculations. PSOs have been provided with a handbook that contains

overview descriptions of marine mammals, Incidental Harassment authorizations from NMFS and USFWS.

Aerial Surveys

In addition to the PSOs trained in performing vessel-based surveys, additional personnel trained in aerial survey procedures could be available during a response operation. General methodologies to ensure personnel safety and prevent the disturbance of marine mammals, specifically bowhead whales, have been established. The aircraft are generally flown at 120 knots ground speed and usually at an altitude of 1,000 ft. Surveys in the Chukchi Sea are directed at bowhead whales and Pacific walrus and an altitude of 900 ft to 1,000 ft is the lowest survey altitude that can normally be flown without concern about potential aircraft disturbance.

I.2.3 Wildlife Hazing

Wildlife hazing is intended to minimize injuries to wildlife by attempting to keep animals away from oil and/or cleanup operations. Hazing activities must take place only under the authority and oversight of wildlife resource (trustee) agencies, in coordination with the UC. Any recommendation to haze or deter wildlife is made to the UC. The recommendation will be guided by site-specific and species-specific factors present at the time of the spill, and availability of proven hazing techniques.

Hazing contractors (or other hazing personnel) must be properly trained in the use of hazing equipment, and must use appropriate PPE and other safety precautions. For guidelines regarding hazing strategies, refer to Wildlife Response Strategies in this WRP and the Wildlife Protection Guidelines for Alaska.

Permit Requirements

Permits are required for secondary and tertiary wildlife response activities. The permits relate to the jurisdiction and resource protection interests of each agency. There are three federal laws for the protection of wildlife that are relevant to spill response: the MBTA, the MMPA, and the ESA. In addition, the Bald Eagle Protection Act protects Bald Eagles and Golden Eagles, but would rarely be relevant to spill response activities.

Migratory Bird Treaty Act

The MBTA prohibits anyone without a permit from pursuing, hunting, killing, possessing, or transporting (or attempting to do any of these things) most native birds in the United States. The MBTA applies to live and dead birds, and active nests (nests with eggs or chicks). The trustee agency overseeing the MBTA is the USFWS.

Marine Mammal Protection Act

The MMPA prohibits the “take” of marine mammals (including pinnipeds, cetaceans, and sea otters). Take is defined under the MMPA as: “to harass, hunt, capture, kill or collect, or attempt to harass, hunt, capture, kill or collect.” Under Section 109(h) of the MMPA, federal, state and local government officials, or designees of the relevant Secretaries of the Departments of the Interior and Commerce, may take marine mammals during the course of official response duties if such taking is for the protection or welfare of the mammal, the protection of public health and welfare, or the non-lethal removal of nuisance animals. Other exemptions to the take prohibition that are relevant to oil spill response include activities conducted under a permit or agreement issues by NMFS.

Endangered Species Act

The ESA prohibits take of species listed as Threatened or Endangered under the Act. “Take” under the ESA is defined as “to harass, harm, pursue, hunt, shoot, wound, kill, trap, capture, or collect, or to attempt to engage in any such conduct.” The USFWS oversees permitting authorization issues for the allowed take of listed terrestrial species, non-marine fish, birds, and sea otters. NMFS oversees permitting authorization of the allowable take of other marine mammals, sea turtles (in water), and marine and anadromous fishes.

In 2001, the USFWS and other federal agencies signed a MOU regarding oil spill planning and response activities related to the ESA. This MOU recognized that oil spill response is a federal action, and thus is subject to Section 7 of the ESA, which involves inter-agency consultations regarding Threatened and Endangered Species. The MOU includes guidelines for pre-spill planning (including protocols for listed species, as included in this WRP) and guidelines for emergency Section 7 consultations during and after spill response.

The MMPA of 1972 granted NMFS responsibility for the management and conservation of all cetaceans (whales) and pinnipeds (seals and sea lions), except walrus. NMFS is also responsible for the administration of the ESA as applied to its trust species. The USFWS has responsibility for managing and protecting walrus, polar bears, terrestrial mammals and migratory bird species. USFWS is also responsible for the administration of the ESA as applied to its trust species. USFWS has joint statutory responsibility with ADF&G for management of wildlife on all federal lands in Alaska.

The UC can apply for permits during a response using the checklists and permit applications provided in the ARRT Annex G in the Wildlife Protection Guidelines of the Unified Plan for Alaska (see Attachment I-2). Permits for the hazing, capture, and holding of live animals are summarized in Table I.2-1, as adapted from ACS Tactic W-1.

**Table I.2-1
 State and Federal Permits and/or Authorizations Required for Hazing,
 Collecting, or Holding Live Animals**

SPECIES	ADF&G		USFWS		NMFS	
	COLLECT AND HOLD	HAZE	COLLECT AND HOLD	HAZE	COLLECT AND HOLD	HAZE
Migratory birds	No	Yes	Yes	No	No	No
Walrus and polar bears	No	No	Yes	Yes	No	No
Whales, porpoises, and seals	No	No	No	No	Yes	Yes
Terrestrial mammals	Yes	Yes	No	No	No	No
Endangered species*	Yes	Yes	Yes	Yes	No	No

Source: App. 16 of the ARRT Wildlife Protection Guidelines, Alaska Unified Plan

*Endangered and threatened species are listed in Appendices 2 through 4 of the ARRT Wildlife Protection Guidelines. Confirm the current listing status at the time of the response operations.

I.2.4 Wildlife Recovery and Care

Recovery of oiled wildlife involves collecting dead and capturing live animals and transporting them to processing and rehabilitation centers. Wildlife recovery and care by any agency or organization must be conducted under the direction of the UC (see below and Attachment I-2). Wildlife recovery and care activities must comply with agreements and permits from the appropriate management agencies as discussed under Wildlife Hazing. Recovery efforts are typically based at the Field Stabilization facility or other staging area. This staging site will act as a check-in and check-out site for staff, a staging area for capture equipment, and a site for personnel decontamination. Recovery personnel are drawn from state and federal trustee agencies and approved contractors. Wildlife recovery may be integrated with wildlife reconnaissance operations.

It is important that dead animals are collected, documented, and held until disposal is approved by the trustees. The prompt removal of dead oiled animals from the environment can be critical to minimize the effects of secondary oiling such as poisoning of predators and scavengers. While conducting beach surveys and/or capturing wildlife during a response, it is not always feasible, reliable, or practical to attempt to discriminate between spill-related and non-spill-related casualties; thus all dead animals should be collected.

Although the standard method for recovery of birds is capture on the ground or on the water with long-handled nets, various other techniques may be considered depending on conditions. Standard protocols will be used to capture/collect marine mammals, in coordination with the NMFS Marine Mammal Stranding Network Coordinator. For guidelines regarding recovery strategies, refer to Wildlife Response Strategies in this WRP.

Wildlife care involves field stabilization, treatment, and processing:

- Field stabilization provides triage in the field prior to transportation to a primary care facility;
- Care ensures that wildlife exposed to petroleum products receive the best achievable care by providing access to veterinary services and to rehabilitation centers; and
- Processing ensures oiled animals are fully evaluated and data are captured, so the UC can obtain oiled wildlife statistics used for a variety of purposes, such as response strategy development and media updates.

Establishing Wildlife Collection Programs and Treatment Facilities

The decision to establish a capture and treatment program for oiled birds and/or marine and terrestrial mammals can only be made by the federal OSC based on recommendations of representatives of appropriate wildlife resource agencies.

The following factors will be considered when determining when to begin and end a wildlife capture and treatment program. The resulting information will be documented by Shell and the appropriate wildlife resource agencies.

- Appearance of species in Migratory Birds species, Marine Mammal species, or Terrestrial Mammal species.
- Wildlife Response Team safety considerations.
- Legal status of the species affected (e.g., special management concern, threatened, endangered).

- Population status of the species affected (e.g., international, national, and regional significance).
- Estimated percentage of the population affected.
- Use of the species as a subsistence resource.
- Logistical constraints in treating oiled animals (e.g., airports/runways and equipment availability).
- Anticipated success in effectively treating oiled animals (i.e., expected survival rate of treated wildlife).
- Public concern.
- Projected cost of treatment program and funding availability.
- Whether adequate treatment facilities exist (i.e., facilities must maintain wildlife in an environment that has low risk of disease).
- Whether capture and treatment program and subsequent release poses any risk (due to disease, social disruption, or mortality) to wild animal populations.
- Whether sufficient facilities exist for keeping wildlife in captivity that cannot be released back into the wild.
- Whether wildlife resource agencies are able to assume lead responsibility for all components of a wildlife capture and treatment program.

In the event that a wildlife capture and treatment program is initiated, Shell, through appropriate contractors and organizations, will take the lead for the following:

- Contracting with the appropriate organizations and/or individuals for wildlife collection, transportation, and treatment.
- Obtaining necessary equipment and materials for wildlife collection, transportation, and treatment.
- Acquiring appropriate size and number of treatment facilities.
- Capturing oiled wildlife and transporting them to treatment facilities.
- Treating oiled wildlife.
- Transporting, in coordination with USFWS and NMFS, treated wildlife to release sites or securing space in appropriate marine aquariums or zoos.
- Ensuring that people involved in the collection, handling, or transportation of wildlife have appropriate training.
- Ensuring that necessary permits are requested expeditiously.
- Ensuring that appropriate and accurate data are recorded regarding the numbers, condition, and location of all wildlife collected or observed by response personnel.
- Ensuring that necropsies are performed, when necessary, by federal and/or state pathologists or a pathologist approved by appropriate wildlife resource agencies, and that all results from necropsies are provided to appropriate wildlife resource agencies and treatment workers in a timely manner.
- Ensuring responsible handling, care and humane treatment of wildlife at all facilities.
- Controlling and limiting public access to all wildlife facilities.

As specified in the Wildlife Protection Guidelines for Alaska, USFWS and NMFS (as appropriate) will take the lead for the following:

- Ensuring that necessary permits (with clauses regarding capturing, holding, cleaning, treating, euthanizing, and releasing wildlife) are issued expeditiously to appropriate individuals and/or organizations.
- Providing personnel and/or the names of specially trained personnel to Shell when marine or terrestrial mammals are involved.
- Providing agency oversight for each treatment facility to ensure that wildlife are handled properly by contracted individuals or organizations.
- Ensuring that wildlife receives humane and appropriate treatment from their point of capture through their release to the wild or into marine aquariums or zoos.
- Approving releases to the natural habitat or transfers of wildlife to marine aquariums or zoos.

Staffing and Equipment

Wildlife response staffing and procurement of equipment resources should be tailored specifically to meet the needs of each incident. Number of personnel needed may vary from a few personnel necessary to implement a Wildlife Branch under the Operations Section to hundreds of personnel for a very large oil spill. Primary personnel include Branch Director, Deputy Director, GIS Specialist, Data Manager, Unit Leaders, Rehabilitation Specialists (veterinarians and pathologists), and various field team leaders. Primary personnel to conduct wildlife response operations typically come from wildlife resource agencies and approved contractors. The largest staffing needs are for recovery and care operations (tertiary responses). However, in the event of a very large oil spill or a spill affecting an exceptionally sensitive area, many additional staff may be needed.

Mobilization of equipment is highly dependent on the situation, and the level of activation for equipment must be determined on a case-by-case basis by the Wildlife Branch and the Environmental Unit in consultation with the UC. Entities in Alaska with equipment and materials stockpiled for deterring oiled wildlife and capturing and treating oiled wildlife are provided in Attachment I-2. Specialized equipment needs and activation protocols are also specified in greater detail as part of Shell's Regional OSRP.

Wildlife Experts/Contractors

There are a number of wildlife experts and contractors that can assist with Wildlife Response operations (e.g., for wildlife reconnaissance). Included in this category are staff of other wildlife resource (trustee) agencies, including the USFWS, National Park Service, NOAA/NMFS, ADF&G, and other local agencies (e.g., NSB Department of Wildlife). Shell maintains a Wildlife Response Contact List (see Attachment I-1) which is updated on a regular basis.

The following provides a general overview of resources available:

- Local residents possessing Traditional Knowledge
 - whaling captains and crews
 - AEWG
 - Village elders and leaders
 - PSOs
 - Subsistence Advisors

- Agency personnel
 - NSB Department of Wildlife Management
 - ADF&G
 - ADNR
 - USFWS
 - NMFS
- Trained biologists and scientists with wildlife response expertise
 - Polaris Applied Sciences, Inc.
 - Cardno ENTRIX
 - AES-RTS personnel
 - ABR Inc. Environmental Research & Services
 - LGL Alaska Ecological Research
- Alaska Clean Seas
 - ACS permits for birds and terrestrial mammals (ACS Tactic W-1)
 - Master Service Agreement with International Bird Rescue and Rehabilitation Center (IBRRC)
 - ACS Mobile Wildlife Stabilization Center
- Wildlife response contractors
 - IBRRC, including IBRRC's network of subcontractors
 - Tri-State Bird Rescue and Research, Inc.
 - Alaska SeaLife Center, Seward, Alaska
 - The Alaska Zoo, Anchorage, Alaska

Safety Considerations

Worker safety must be considered before any wildlife reconnaissance, protection or retrieval effort is conducted. If a wildlife response cannot be conducted safely, it should not be attempted. An incident-specific Site Safety Plan can be modified to address specific Wildlife Response needs.

Safety hazards that may confront Wildlife Response personnel include, but are not limited to: toxic vapors, fire hazard, hazardous weather and seas, unsafe footing, diseases or injuries inflicted by wild animals, and fatigue. Therefore, all Wildlife Response activities must conform to the Site Safety Plan for the response, and all personnel involved in Wildlife Response operations must have appropriate job-specific safety training for the tasks to be performed. They must be adequately protected with the appropriate PPE. Those people involved with animal handling should be trained in techniques that ensure worker safety and present the least amount of stress to wildlife.

I.3 WILDLIFE RESPONSE STRATEGIES

Strategies for the protection of migratory birds and wildlife during a response operation are readily available. The ACS Technical Manual and the ARRT Wildlife Protection Guidelines for Alaska, for example, provide in-depth guidance specific to birds and wildlife determent, hazing, capture, transportation, stabilization, and treatment protocols. Numerous other federal and state plans have also been developed that contain guidelines and protocols for different response strategies. At the national level, the USFWS has prepared two related plans, the Best Practices for Migratory Bird Care During Oil Spill Response and the Fish and Wildlife Service National Oil Spill Contingency Plan. Both USFWS plans can be viewed at: <http://www.fws.gov/contaminants/>. NMFS's Marine Mammal Health and Stranding Response Program has developed Marine Mammal Oil Spill Response Guidelines, available at: http://www.nmfs.noaa.gov/pr/pdfs/health/eis_appendixl.pdf. This WRP is compatible with those plans.

This section provides detailed response strategies for migratory birds, marine mammals, and terrestrial mammals. Although objectives and strategies are clearly identified in this WRP, priority actions and tactics must be decided on the basis of incident-specific information. As indicated repeatedly, responders must either be pre-authorized or receive authorization from the appropriate wildlife resource (trustee) agency (e.g., USFWS, NMFS, and ADF&G) during any response activity involving birds and other wildlife.

I.4 MIGRATORY BIRDS

A variety of migratory birds may be present during a response operation on the Chukchi Sea. Various categories to differentiate migratory bird species have been developed (see Table I.4-1). The major group to which each migratory bird species belongs is indicated as follows: waterfowl (WF), seabird (SE), and other diving bird (DB), shorebird (SH), raptor (RA), and upland bird (UB). Also indicated are endangered species (ES), threatened species (TS), and those of special management concern (SMC) to the ADF&G. Species of SMC are generally defined as species established as a priority for study and management by public agencies to prevent their populations from declining to a level warranting a listing action under the ESA.

While the behavior of birds varies with species and season, general sensitive locations can be identified for their biological importance. The areas that should be prioritized during response operations include migration stopovers, such as lagoons along the Chukchi Sea coastline, seabird colonies that may include large on-water flocks, major feeding areas, wintering areas, and coastal habitats.

Strategies for protecting migratory birds from oil include containing the oil before it reaches the birds, hazing them from oiled areas, and capturing and treating oiled birds. Information on the feasibility of applying various response strategies to migratory bird species (including waterfowl) is provided in Appendix 6 of Wildlife Protection Guidelines for Alaska. This information includes their relative sensitivity to oiling, their relative sensitivity to disturbance during critical periods of their life cycles, and general recommendations for minimizing adverse effects during an oil-spill response. Citations for deterrent, capture, and treatment techniques are also included.

Any response activity involving migratory birds must have the approval of the appropriate wildlife resource agency and the FOSC.

**Table I.4-1
Migratory Birds**

SPECIES OF CONCERN	POPULATION DENSITY CODE	SPECIES OF CONCERN	POPULATION DENSITY CODE
Loon (DB)	P/S	American golden plover (SH)	P
Grebe (DB)	A	Semipalmated plover (SH)	U
Tundra swan (WF)	P/S	Aleutian tern (SE)	A
Greater white-fronted goose (WF)	P/S	Arctic tern (SE)	U
Snow goose (WF)	P/S	Gulls (SE)	P/S
Emperor goose (WF)	R/S	Murres (SE)	P/S
Black brant (WF)	P/S	Guillemots (SE)	U
Canada goose (WF)	P/S	Murrelets (SE)	R
Oldsquaw (WF)	P/S	Kittlitz's murrelet (SE)(SMC)	R
Greater scaup (WF)	U/S	Puffins (SE)	R
Red-breasted merganser (WF)	R/S	Scoter (WF)	U/S
Northern pintail (WF)	P/S	Mallard (WF)	R/S
Bufflehead (WF)	A	Bald eagle (RA)	A
Goldeneye (WF)	A	Osprey (RA)(SMC)	A
Canvasback (WF)	A	Arctic peregrine falcon (RA)	P
Northern shoveler (WF)	R	Snowy owl (RA)	U/S
Spectacled eider (WF)(TS)	U/S	Sandhill crane (SH)	U/S
Steller's eider (WF)(TS)	U/S	Wandering tattler (SH)	A
King eider (WF)	P/S	Bristle-thighed curlew (SH)(SMC)	R
Common eider (WF)	P/S	Northern fulmar (SE)	R
Harlequin duck (WF)(SMC)	R	Black-legged kittiwake (SE)	P
American widgeon (WF)	U/S	Cormorant (SE)	R
Green-winged teal (WF)	U/S	Ptarmigan (UB)	P/S
Wandering tattler (SH)	A	Semipalmated plover (SH)	U
Bristle-thighed curlew (SH)(SMC)	R	Aleutian tern (SE)	A

A = Casual/Accidental
DB=Diving Bird
ES=Endangered Species
O = Pelagic (well offshore)
P = Present
R = Rare
RA=Raptor
S = Subsistence Species

SE= Seabird
SH=Shorebird
SMC=Special Management Concern
TS=Threatened Species
U = Uncommon
UB=Upland Bird
WF = Waterfowl

Primary Response Strategy

The primary strategy for protecting migratory birds during a response operation is preventing birds from contacting oil by containing the oil before it reaches their location. This can be accomplished by using either booms and skimmers or, where environmental considerations allow, using chemical dispersants and/or *in situ* burning. Booms and skimmers and *in situ* burning are preferable near concentrations of birds because dispersants, being detergents, reduce the insulating value of their plumage and therefore may cause mortality to some birds. If possible, spraying dispersants directly into large concentrations of birds should be avoided. After dispersants have mixed with water, their danger to birds is reduced, although not eliminated. In addition, oiled debris (particularly contaminated food sources) should be removed from the environment as soon as possible to prevent scavenging by birds, which results in secondary effects due to the ingestion of oil.

Birds concentrate in various areas, depending on the species and season. If possible, the following types of areas where birds concentrate should be protected following an oil spill:

- 1) Migration stopovers ("staging areas"): Some migratory birds form immense flocks during spring and fall migrations. Shorebirds and waterfowl gather at lagoons and estuaries to feed. Critical areas include lagoons of the Chukchi Sea coast.
- 2) Seabird colonies: Many seabirds nest in colonies that range from a few dozen to several million birds. Birds are vulnerable to oil contamination when they are in large flocks on the water near the colony. Highest priority should be given to colonies containing rare species, the largest colonies in a region, and those with many species.
- 3) Major feeding areas of seabirds: Most seabirds obtain their food at sea away, from land. While they may feed in areas that are close to land or more than 100 miles offshore, they are often concentrated in small areas. As a result, the presence of oil in some feeding areas could disable the majority of seabirds in the region. Feeding areas shift with the tides and seasons, so the position of large flocks fluttering over or sitting on the water should be carefully noted during reconnaissance flights and avoided, if possible, when applying dispersants.

Secondary Response Strategy

Any secondary response activities must have the approval of the appropriate wildlife resource agency and the FOSC.

The secondary response strategy to protect birds is to deter them from a slick or contaminated shoreline using established deterrent methods: visual, auditory, and combinations of visual and auditory. A deterrent may be used to discourage birds from landing in or near an oil-contaminated area. In many cases, birds must be deterred from contaminated areas repeatedly and frequently. Often the techniques require frightening birds to keep them away. While the selection of the appropriate technique may be determined by the availability of technology and the specific situation, general selection methods include:

- In situations where waterfowl, shorebirds, and raptors are dominant, use exploders to disperse birds, unless the birds are flightless. Young and molting birds may need to be herded with boats and/or vehicles.
- In situations where diving birds are dominant, underwater sound (if effective) should be used. Some birds, such as auklets, are attracted to lights while other species, such as loons and grebes, may be repelled.

Additional visual and auditory methods are provided in the ARRT Wildlife Protection Guidelines for Alaska and in the ACS Tactics W-1 through W-6.

Tertiary Response Strategy

Any tertiary response activities must have the approval of the appropriate wildlife resource agency and the FOSC.

The tertiary response to protect birds during response operations is to attempt to capture and treat oiled birds. Capturing and treating oiled birds is the protection method of last resort. Although methods for cleaning birds are well established, only a small proportion of birds can be saved once their plumage has become oiled.

Refer to Section I.2.4 of this WRP (Establishing Wildlife Collection Programs and Treatment Facilities) for a description of Shell and regulatory agency responsibilities in a bird capture and treatment program.

Response contractors that handle bird operations and agency contacts for the USFWS and ADF&G for operations involving birds are available. For example, ACS maintains a service agreement with IBRRC and maintains a Mobile Wildlife Stabilization Center located on the North Slope but that can be transported to other locations if necessary.

Equipment and Material

Information on equipment and materials for deterring unoiled migratory birds and capturing and treating oiled migratory birds is presented in Appendices 17, 18, and 19 of Wildlife Protection Guidelines for Alaska. In addition, Appendix 20 (see Attachment I-2) provides a list of entities in Alaska with equipment and materials stockpiled for deterring unoiled wildlife and capturing and treating oiled wildlife, including migratory birds.

I.5 MARINE AND TERRESTRIAL MAMMALS

During response operations a variety of marine and terrestrial species may be encountered. A list of species and density descriptions are provided for marine mammals (see Table I.5-1) and terrestrial mammals (see Table I.5-2).

The sensitivity of marine and terrestrial mammals to spilled oil is highly variable. It appears to be most directly related to the relative importance of fur and blubber to thermoregulation. Cetaceans are the least sensitive of marine mammals to spilled oil. Direct exposure to oil also can result in reversible conjunctivitis; ingestion of oil can result in digestive tract bleeding and liver and kidney damage. Ingestion of oil is of greater concern for species that groom themselves with their mouth, such as polar bears. Inhalation of hydrocarbon volatiles can result in nerve damage and behavioral abnormalities.

Wildlife response options for marine mammals in the Arctic Ocean and terrestrial mammals remain limited due to regulatory restrictions and the practicality of capturing and handling large animals for treatment. Primary response strategies that involve either removing the oil threat from the animal or its habitat or removing the animal from the threat are most important and effective.

Secondary response options are available and can be effective for certain terrestrial mammals. However, hazing large marine is difficult and success has been varied. In addition, the risk of oiling may be a lesser concern than the consequences of hazing, such as when seals abandon their pups. Due to these considerations, capture, treatment, and rehabilitation options need to

be biologically founded and sensitive to local concerns and knowledge. While specific tertiary response guidelines have been established for birds, methods to capture and clean oiled marine mammals have not been standardized. Procedures that have been developed for sea otters and polar bears may be adapted to other small species of marine mammals such as smaller pinnipeds.

Information on the feasibility of various response strategies for each marine mammal species or group of species is provided in Appendix 7 of the Wildlife Protection Guidelines for Alaska. This information includes population status, their relative sensitivity to oiling, their relative sensitivity to disturbance during critical periods of their life cycles, and general recommendations for minimizing adverse effects during an oil-spill response. Citations for deterrent, capture, and treatment techniques are included.

Information on the feasibility of various response strategies for each terrestrial mammal species or group of species is provided in Appendix 8 of the Wildlife Protections Guidelines for Alaska. This information includes their relative sensitivity to oiling and disturbance, and general recommendations for minimizing adverse effects during an oil-spill response. In addition, citations for deterrent, capture, and treatment techniques are included.

Given the potential to encounter polar bears during a response operation, Attachment I-3 (Polar Bear Interaction Measures) provides response strategies, mitigation measures, and notification procedures to minimize the risk of injury to personnel and disturbance to bears.

Primary Response Strategy

In response operations that involve marine and terrestrial mammals, the primary response strategy is to control the release and spread of spilled oil at the source to reduce impacts to species and their habitats. In prioritizing response operations for marine mammal habitats, emphasis should be placed on protecting pinniped-haulout beaches.

A primary response should also include the removal of oiled carrion to prevent marine and terrestrial mammals, such as polar bears and grizzly bears, from ingesting oil as they scavenge for food. All primary response operations should be conducted as far from marine and terrestrial mammals as operations allow.

Secondary Response Strategy

With the approval of the appropriate wildlife resource agency and FOSC and the consideration of the welfare of the animal, secondary response techniques such as herding and deterring would be employed to prevent the oiling of animals. These options are most feasible for pinnipeds at haulout and rookery areas during the period when territorial bonding is weakest. It may be possible to deter polar bears when they are swimming. It may also be possible to deter grizzly bears and other terrestrial mammals from impacted beaches.

Tertiary Response Strategy

Any tertiary response of attempting to capture and treat oiled animals must have the approval of the appropriate wildlife resource agency and the FOSC. These activities should be performed by people with the experience in capturing and handling the subject species. Trained professionals are available within Alaska to respond should a tertiary response be necessary (see Attachment I-1). The Alaska SeaLife Center located in Seward, Alaska maintains statewide permits for the handling and transport of stranded animals, and retains a veterinarian trained in responding to oiled animals. The Alaska Zoo also provides handling and transport capability for terrestrial mammals.

**Table I.5-1
 Marine Mammals**

SPECIES OF CONCERN	POPULATION DENSITY CODE	SPECIES OF CONCERN	POPULATION DENSITY CODE
Polar bear	P/S	Killer whale	P
Ringed seal	P/S	Fin Whale	U
Spotted seal	P/S		
Bearded seal	P/S		
Pacific walrus	P/S		
Ribbon seal	P(pack ice)/S		
Bowhead whale (ES)	P/S		
Gray whale	P		
Minke whale	U		
Beluga whale (SMC)	P/S		
Harbor porpoise	P/S		

ES = Endangered Species, O = Pelagic (well offshore), P = Present, R = Rare,
 SMC = Special Management Concern, S = Subsistence Species, TS = Threatened Species, U = Uncommon

**Table I.5-2
 Terrestrial Mammals**

SPECIES OF CONCERN	POPULATION DENSITY CODE	SPECIES OF CONCERN	POPULATION DENSITY CODE
Brown Bear	P/S/SMC	Red Fox	P/S
Black Bear	P/S	Aquatic Furbearers	P/S
Caribou/Reindeer	P/S		
Moose	P/S		
Muskoxen	P/S		
Dall Sheep	P/S		
Wolf	P/S		
Arctic Fox	P		

ES = Endangered Species, O = Pelagic (well offshore), P = Present, R = Rare,
 SMC = Special Management Concern, S = Subsistence Species, TS = Threatened Species, U = Uncommon

Equipment and Material

Information on equipment and materials for deterring unoiled mammals and capturing and treating oiled mammals is located in Appendices 20, 23, 24, 25 of Wildlife Protection Guidelines for Alaska. In addition, Appendix 21 (see Attachment I-2) provides a list of entities in Alaska with equipment and materials stockpiled for deterring unoiled wildlife and capturing and treating oiled wildlife, including mammals.

**Attachment I-1
Wildlife Response Contact List**

TITLE	NAME	EMAIL	MOBILE	OFFICE	OTHER
USFWS Spill Response Coordinator*	Philip Johnson	Philip_johnson@fws.gov	907-242-6893	907-786-3483	907-345-0300
USFWS Alternate	Deborah Rudis	Deborah_Rudis@fws.gov	907-723-9981	907- 780-1183	
USFWS Walrus Hazing Advisor	James MacCracken	james_maccracken@fws.gov	907-952-3778	907-786-3803	
USFWS Polar Bear Hazing Advisor	Craig Perham, USFWS	Craig_Perham@fws.gov	907-887-3082	907-786-3810	
USFWS Endangered Species	Ted Swem	Ted_Swem@fws.gov		907-456-0441	
USFWS Wildlife Advisor	Don Dragoo	Don_Dragoo@fws.gov		907-226-4626	
USFWS Wildlife Advisor	David Payer	David_Payer@fws.gov		907-455-1830	
USFWS Supervisor	Jenifer Kohout	Jenifer_Kohout@fws.gov	907-223-5829	907-786-3687	
USFWS Chief Waterfowl Mgmt.	Eric Taylor	eric_taylor@fws.gov	907-903-7210	907-786-3446	
USFWS Chief Fisheries	Jeff Adams	jeff_adams@fws.gov	907-978-1861	907 456-0218	
NMFS Field Office Supervisor	Brad Smith	Brad.smith@noaa.gov		907-271-5006	907-248-4211
NMFS Alternate	Matt Eagleton	Matthew.eagleton@noaa.gov		907-271-6354	
NMFS Marine Scientist	Robin Angliss, NMFS	robyn.angliss@noaa.gov		206-526-4032	
ADF&G Spill Response Coordinator	Brad Dunker	Bradley_Dunker@alaska.gov	907-529-6258	907-267-2541	907-562-1612
ADF&G Alternate	Todd Nichols	todd.nichols@alaska.gov		907-459-7363	907-479-2320
Alaska Clean Seas	Lee Majors / Ken Linderman	Planning@alaskacleanseas.org	907-659-0812	907-659-3207	
Polaris Applied Sciences	Greg Challenger (Polaris)	gchallenger@polarisappliedsciences.com	206-369-5686	425-823-4841	
Alaska SeaLife Center	Halley Werner (Alaska SeaLife Center)	halleyw@alaskasealife.org		907-224-6399	888-774-7325
Alaska SeaLife Center	Pam Tuomi (Alaska SeaLife Center)	pam_tuomi@alaskasealife.org		907-224-6340	888-774-7325
Valdez SERVS	Duty Officer			907-834-6901	
IBRRC	Barbara Callahan	barbara.callahan@ibrcc.org	907-230-2792	907-562-1326	888-477-1743 (24 hr)
NSB Wildlife Biologist	J. Craig George, NSB	Craig.George@north-slope.org		907-852-0350	
NSB Wildlife Biologist	Robert Suydam, NSB	Robert.Suydam@north-slope.org		907-852-0350	
Alyeska Pipeline Service Company	Kate Montgomery	MontgomeryKA@alyeska-pipeline.com	907-659-2437	907-787-4185	
Alaska Chadux Corporation	Matt Melton	mmelton@chadux.com	907-348-2348		
Shell Environmental Unit Leader	Michael Macrander	a.macrander@shell.com	907-317-9314	907-646-7123	
Shell Technical Specialist	Victoria Broje	victoria.broje@shell.com	281-660-4353	281-544-7437	

* In the event of a spill, the initial notification should be made to the USFWS primary point of contact, the Spill Response Coordinator (or their alternate).

THIS PAGE
INTENTIONALLY
LEFT BLANK

Attachment I-2
Facilities and Permit Applications
ARRT Annex G Wildlife Protection Guidelines for Alaska
(Appendices 20, 24, and 25)

The most current versions of the ARRT Annex G Wildlife Protection Guidelines for Alaska are available online at: <http://www.dec.state.ak.us/spar/perp/plans/uc.htm>.

Appendix 20

Entities in Alaska with Equipment and Materials Stockpiled for Deterring Unoiled Wildlife and Capturing and Treating Oiled Wildlife

Appendix 24

Oil Spill Response Checklist: Unoiled Wildlife Deterrence Activities

Appendix 25

Oil Spill Response Checklist: Pre-Emptive Capture of Unoiled Wildlife and / or Capture and Rehabilitation of Oiled Wildlife.

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

Appendix 20¹

**Entities in Alaska with Equipment and Materials Stockpiled for
 Deterring Unoiled Migratory Birds, Capturing and Rehabilitating Oiled Migratory Birds and Sea Otters, and
 Holding Polar Bears**

Location	Response Action	Amount of Supplies	Total Animals to be Assisted with Supplies	Owner/Contact Person/ Contact Information
Deadhorse	Bird deterrence	10 kits	Birds at multiple locations	Lee Majors or Ken Linderman Alaska Clean Seas 659-3207 (ph) 659-2405 (24 hr) 659-2616 (fax) planning@alaskacleanseas.org (email)
	Bird capture/field stabilization	10 kits	100 birds	
	Bird stabilization center	1 module ²	350 birds	
	Bird capture	2 net launchers	1 bird per each launch	
	Bird deterrent buoys	11 Breco buoys	Seabirds at multiple locations	
	Bird deterrence	56 propane cannons	Birds at multiple locations	
	Bear holding	3 cages	3 bears	
	Bear transport cage	1 cage	1 bear	
	Bear stabilization kit	3 totes	3 bears	

¹ Information in this appendix was provided by representatives of the oil industry and their wildlife response contractors. The information has not been verified by wildlife resource agencies. The appearance of wildlife response information in this appendix does not constitute compliance by oil spill contingency plan holders with State of Alaska oil spill contingency planning requirements.

² Module may be transported by Hercules L-100 or C-130 aircraft.
 Revision 5 October 2012

Appendix 20, Cont.

Location	Response Action	Amount of Supplies	Total Animals to be Assisted with Supplies	Owner/Contact Person/ Contact Information
Prudhoe Bay (Alyeska Pump Station #1)	Bird deterrence	1 kit	Birds at 2 onshore locations	Kate Montgomery or Cathy Girard Alyeska Pipeline Service Company 787-4185 (ph) or 659-1085 (in Deadhorse) 787-4186 (fax) 659-1007 (security - emergencyonly) envirocoordps1-ps4@alyeska-pipeline.com (email)
	Bird stabilization	1 kit	150 birds	
	Bird capture	5 kits	50 birds	
Fairbanks (Alyeska Response Base -Nordale Yard)	Bird deterrence	2 kits	Birds at 2 onshore locations	Dave Schmidt or Ken Wilson Alyeska Pipeline Service Company 787-8908 or 450-5732 (ph) 590-8939 or 322-2799 (cell) 450-5707 (24 hr) 450-5534 (fax) David.Schmidtdr@alYESKA-pipeline.com (email) Kenneth.Wilsonk@alYESKA-pipeline.com (email)
	Bird stabilization	1 kit	150 birds	
	Bird capture	5 kits	50 birds	
	Bird stabilization	1 module ³	Pass-through facility	
Anchorage	Bird rehabilitation	1 facility	500 birds	Barbara Callahan International Bird Rescue 230-2792 (ph) 1-888-447-1743 (24 hr) 227-4956 (fax) barbara.callahan@ibrcc.org (email)

³ Module may be transported by Hercules L-100 or C-130 aircraft.
 Revision 5 October 2012

Appendix 20, Cont.

Location	Response Action	Amount of Supplies	Total Animals to be Assisted with Supplies	Owner/Contact Person/ Contact Information
Anchorage	Bird rehabilitation	1 mobile trailer pass through facility ⁴	150 birds	Robert E. Heavilin Alaska Chadux Corporation 348-2365 (24 hr) 348-2330 (fax) bheavilin@chadux.com (email)
	Bird capture and stabilization	4 kits	50 birds/kit	
	Bird deterrence	1 kit	Sustained bird deterrence at 3 onshore locations	
	Sea otter capture	4 capture kits	40 sea otters (capture and holding) ⁵	
	Sea otter holding	3 transportable floating pens	30 sea otters	
Anchorage	Bird stabilization	2 kits	100 birds	David Simmerman Navy Supervisor of Salvage 384-2968 (ph) 229-8859 (24 hr) 384-2969 (fax) DWSimmerman@cssmnavy.net (email)
	Sea otter capture	2 capture kits	26 sea otters (capture and holding) ⁶	
	Sea otter holding	2 transportable floating pens	26 sea otters	

⁴ Module may be transported by Hercules L-100 or C-130 aircraft.

^{5,6} Additional sea otters could be captured in a pre-emptive capture and release program.

Appendix 20, Cont.

Location	Response Action	Amount of Supplies	Total Animals to be Assisted with Supplies	Owner/Contact Person/ Contact Information
Valdez (SERVS Annex)	Bird deterrence	4 kits	Birds at 4 onshore locations	SERVS Duty Officer Alyeska Pipeline Service Company 834-6901 (24 hr)
	Bird deterrent buoy	1 Breco buoy	Seabirds	
	Bird stabilization	1 kit	500 birds	Or
	Bird stabilization	1 module ⁷	Pass-through facility	Ken Wilson Alyeska Pipeline Service Company 450-5732 (ph) 907-322-2799 (cell) 450-5707 (24 hr) 450-5534 (fax) Kenneth.Wilson@alyska-pipeline.com (email)
	Bird capture	40 kits	400 birds	
	Sea otter capture	4 kits	40 sea otters	
	Sea otter stabilization	1 lab module 1 holding module	100 sea otters	
	Sea otter rehabilitation	1 facility	100 sea otters initially and up to 200 sea otters per day maximum	

⁷ Module may be transported by Hercules L-100 or C-130 aircraft.

Appendix 20, Cont.

Location	Response Action	Amount of Supplies	Total Animals to be Assisted with Supplies	Owner/Contact Person/ Contact Information
Homer	Sea otter capture	1 kit	25 sea otters	Todd Paxton Cook Inlet Spill Prevention & Response, Inc. 776-7401 (ph) 776-5129 (24 hr) 776-2190 (fax) tpaxton@cipsri.org (email)
	Sea otter holding	1 transportable floating pen, 4 capture cages	25 sea otters	
Nikiski	Bird deterrent	6 kits	Birds at 6 onshore locations	Todd Paxton Cook Inlet Spill Prevention & Response, Inc. 776-7401 (ph) 776-5129 (24 hr) 776-2190 (fax) tpaxton@cipsri.org (email)
	Bird capture	10 kits	500 birds	
	Sea otter capture	2 kits	50 sea otters	
Seldovia	Sea otter holding	6 transportable floating pens, 9 capture cages	72 sea otters (pens)	Todd Paxton Cook Inlet Spill Prevention & Response, Inc. 776-7401 (ph) 776-5129 (24 hr) 776-2190 (fax) tpaxton@cipsri.org (email)
	Sea otter rehabilitation	1 transportable facility, 8 vans	40 sea otters (treat); 80 sea otters (hold)	

Appendix 20, Cont.

Location	Response Action	Amount of Supplies	Total Animals to be Assisted with Supplies	Owner/Contact Person/ Contact Information
Ketchikan Sitka Juneau Petersburg Skagway Craig/Klawock	Bird deterrence	1 kit per each location	Birds at onshore locations	Dave Owings Southeast Alaska Petroleum Resource Organization 225-7002 (24 hr) 617-2831 (cell) 247-1117 (fax) dave@seapro.org (email)
Sitka	Bird capture and field stabilization	1 kit	50-75 birds	Dave Owings Southeast Alaska Petroleum Resource Organization 225-7002 (24 hr) 617-2831 (cell) 247-1117 (fax) dave@seapro.org (email)
Ketchikan	Bird capture Bird capture and field stabilization	1 kit 3 kits	25 birds 75-100 birds	Dave Owings Southeast Alaska Petroleum Resource Organization 225-7002 (24 hr) 617-2831 (cell) 247-1117 (fax) dave@seapro.org (email)

Appendix 20, Cont.

Location	Response Action	Amount of Supplies	Total Animals to be Assisted with Supplies	Owner/Contact Person/ Contact Information
Barrow Nome Unalaska Kodiak Dillingham Kenai Bethel Valdez	Bird deterrence	1 kit per each location	Sustained bird deterrence at 3 onshore locations	Robert E. Heavilin Alaska Chadux Corporation 348-2365 (24 hr) 348-2330 (fax) bheavilin@chadux.com (email)
St. Paul	Bird capture and stabilization	1 kit	50 birds	Robert E. Heavilin Alaska Chadux Corporation 348-2365 (24 hr) 348-2330 (fax) bheavilin@chadux.com (email)

THIS PAGE
INTENTIONALLY
LEFT BLANK

Appendix 24

Approval Request Form: Unoiled Wildlife Deterrence Activities*

Responders who have valid permits to conduct wildlife deterrence activities and initiate a deterrence program will need to: (1) follow the terms of their permit, (2) immediately notify the appropriate wildlife resource agency representatives (see Appendix 26) to advise them of actions taken and planned, and (3) submit Sections I-V of this form to the Federal and State OSCs and appropriate wildlife resource agency representatives within 24-hours following the initiation of a wildlife deterrence program.

Responders who do not have valid permits to conduct wildlife deterrence activities as part of a spill response will need to receive authorization from appropriate wildlife resource agencies (e.g., Fish and Wildlife Service and/or National Marine Fisheries Service and Alaska Department of Fish and Game) and the Federal and State On-Scene Coordinators (OSCs) prior to initiating deterrence activities. Responders may apply for authorization to deter wildlife by completing Sections I-V of this form and submitting it to the appropriate wildlife resource agency representatives for consideration.

Responders who do not have valid permits to deter wildlife should note that completing the requested information in this form does not satisfy wildlife resource agencies permitting requirements. Rather, wildlife resource agencies will determine, based on the information submitted to them, whether or not it is appropriate to issue required permits.

*Any deterrence-related activities for species listed as threatened and/or endangered under the Endangered Species Act will be addressed via Federal OSC ESA consultation with Fish and Wildlife Service and/or National Marine Fisheries Service as appropriate.

I. Spill Data
A. Name of incident: _____
B. Date of incident: _____
C. Spill location: _____ latitude: _____ longitude: _____
D. Spill location: land _____; water _____; land and water _____
E. Distance to nearest water body, if on land: _____ km/mi
F. Product released: North Slope Crude _____; Diesel #2 _____; Cook Inlet Crude _____; Chevron Residual _____; JP4 _____; Other _____
G. Estimated volume of product released: _____ gals/bbls
H. Release status: Stopped _____; Continuing _____; Unknown _____
I. Is spill: Contained _____; Spreading _____; Unknown _____

Appendix 24, Cont.

II. Wildlife Data	
Species/Species Groups	Estimated Numbers of Wildlife and Location Relative To Spill Release
e.g., Waterfowl	e.g., 100 common eiders 1 mile northeast from leading edge of spill

Appendix 24, Cont.

III. Primary Response Actions*
<p>Describe any primary response actions underway or previously taken: (1) to protect wildlife and/or wildlife habitat, <u>and</u> (2) which may affect proposed deterrent activities.</p>
<p>* May include (for example) mechanical cleanup, protective booming, <i>in-situ</i> burning, dispersant use, and/or removal of oiled debris including oiled wildlife carcasses.</p>

IV. Secondary Response Actions: Deterrence Activities
<p>A. Describe deterrence plan for each species or species group identified in Section II, including objectives, procedures, equipment, number of persons, location(s), and duration:</p>

Appendix 24, Cont.

IV. Secondary Response Actions: Deterrence Activities, Cont.
<p>B. Names of Individual(s) Conducting Deterrence Activities and Date(s) of Training*</p>
<p>* Only individuals trained and currently certified in bird deterrence techniques by the U.S. Department of Agriculture Animal and Plant Health Inspection Service will be authorized to conduct migratory bird deterrence activities.</p>
<p>C. Person in Charge of Deterrent Activities</p> <p>Name: _____</p> <p>Affiliation: _____</p> <p>Address: _____</p> <p>Deterrence training date and instructor: _____</p> <p>Telephone number: _____</p> <p>Fax number: _____</p> <p>Deterrence permittee: _____</p>

Appendix 24, Cont.

V. Requestor Sign-Off*	
Signature of requestor:	_____
Printed name of requestor:	_____
Title of requestor:	_____
Requestor affiliation (i.e., employer):	_____
Requestor representing:	_____
Sections I-V of this form submitted to the following wildlife resource agency representatives (print names below):	
_____	, FWS
_____	, NMFS
_____	, ADF&G
Date, time, and method of submittal to FWS:	_____
Date, time, and method of submittal to NMFS:	_____
Date, time, and method of submittal to ADF&G:	_____
*If request is made by a wildlife resource agency representative (rather than the Responsible Party), the wildlife resource agency representative will sign as the requestor and will then complete the appropriate information in Section VI.	

Appendix 24, Cont.

VI. Wildlife Resource Agency Response to Request	
A. Date and time request received by wildlife resource agency representative(s):	
Alaska Department of Fish and Game (ADF&G)	
Name:	_____
Date:	_____ Time: _____ Phone #: _____
Fish and Wildlife Service (FWS)	
Name:	_____
Date:	_____ Time: _____ Phone #: _____
National Marine Fisheries Service (NMFS)	
Name:	_____
Date:	_____ Time: _____ Phone #: _____
B. ADF&G Recommendation/Decision:	
<input type="checkbox"/> Approve requested program(s) as proposed	
<input type="checkbox"/> Approve requested program(s) with the following conditions: _____	
<input type="checkbox"/> Deny requested program(s) for the following reason(s): _____	
Signature:	_____ Time: _____ Date: _____
C. FWS Recommendation/Decision:	
<input type="checkbox"/> Approve requested program(s) as proposed	
<input type="checkbox"/> Approve requested program(s) with the following conditions: _____	
<input type="checkbox"/> Deny requested program(s) for the following reason(s): _____	
Signature:	_____ Time: _____ Date: _____
D. NMFS Recommendation/Decision:	
<input type="checkbox"/> Approve requested program(s) as proposed	
<input type="checkbox"/> Approve requested program(s) with the following conditions: _____	
<input type="checkbox"/> Deny requested program(s) for the following reason(s): _____	
Signature:	_____ Time: _____ Date: _____

Appendix 24, Cont.

VII. Federal and State On-Scene Coordinator Response To Request	
A.	State On-Scene Coordinator's decision regarding wildlife response program: Request received by State On-Scene Coordinator: Time: _____ Date: _____ ___ Concur with wildlife resource agencies ___ Do not concur for the following reason(s): _____ Signature: _____ Time: _____ Date: _____
B.	Federal On-Scene Coordinator's decision regarding response program: Request received by Federal On-Scene Coordinator: Time: _____ Date: _____ ___ Concur with wildlife resource agencies ___ Do not concur for the following reason(s): _____ Signature: _____ Time: _____ Date: _____

Appendix 25

Approval Request Form: Pre-Emptive Capture of Unoiled Wildlife and/or Capture and Rehabilitation of Oiled Wildlife¹

Responders who wish to conduct pre-emptive capture of unoiled wildlife and/or capture and rehabilitation of oiled wildlife as part of a spill response will need to receive authorization from appropriate wildlife resource agencies; e.g., Fish and Wildlife Service and/or National Marine Fisheries Service and Alaska Department of Fish and Game and the Federal and State On-Scene Coordinators (OSCs) prior to initiating those activities. Responders may apply for authorization to conduct pre-emptive capture of unoiled wildlife and/or the capture and rehabilitation of oiled wildlife by completing Sections I-V of this form and submitting it to the appropriate wildlife resource agency representatives for consideration.

It should be noted that completing the requested information on this form does not satisfy wildlife resource agencies permitting requirements. Only permitted wildlife rehabilitator(s) with experience in the capture, rehabilitation, and care of oiled wildlife will be authorized for this activity.

I. Spill Data
A. Name of incident: _____
B. Date of incident: _____
C. Spill location: _____ latitude: _____ longitude: _____
D. Spill location: land _____; water _____; land and water _____
E. Distance to nearest water body, if on land: _____ km/mi
F. Product released: North Slope Crude _____; Diesel #2 _____; Cook Inlet Crude _____; Chevron Residual _____; JP4 _____; Other _____
G. Estimated volume of product released: _____ gals/bbls
H. Release status: Stopped _____; Continuing _____; Unknown _____
I. Is spill: Contained _____; Spreading _____; Unknown _____
J. Estimated volume of product potentially released: _____ gals/bbls

¹ Any pre-emptive capture-related activities for unoiled wildlife and/or capture- and rehabilitation-related activities for oiled wildlife species listed as threatened and/or endangered under the Endangered Species Act will require Federal OSC to initiate Section 7 consultation with Fish and Wildlife Service and/or National Marine Fisheries Service.

Appendix 25, Cont.

II. Wildlife Data	
Species/Species Groups	Estimated Numbers of Wildlife and Location Relative to Spill Release
e.g., Waterfowl	e.g., 100 common eiders 1 mile northeast from leading edge of spill

Appendix 25, Cont.

III. Primary Response Actions*
<p data-bbox="360 478 1247 592">Describe any primary response actions underway or previously taken: (1) to protect wildlife and/or their wildlife habitat, <u>and</u> (2) which may affect proposed (a) capture, handling, transportation, holding, and release of unoiled wildlife and/or (b) capture, handling, transportation, stabilization, rehabilitation, and/or release of oiled wildlife.</p> <p data-bbox="360 1512 1247 1558">* May include (for example) mechanical cleanup, protective booming, <i>in-situ</i> burning, dispersant use, and/or removal of oiled debris including oiled wildlife carcasses.</p>

Appendix 25, Cont.

IV. Secondary Response Actions: Pre-Emptive Capture of Unoiled Wildlife*
<p>A. Describe pre-emptive capture plan for each species or species group , including estimated numbers requiring capture; estimated duration of capture activities; location(s) where capture would occur; techniques to be used for capture; estimated number of capture personnel required; equipment, materials and logistics support required; description of holding facility; estimated length of time wildlife would be held; and release plan:</p>
<p>B. Information on Person in Charge of Pre-emptive Capture</p> <p>Name: _____</p> <p>Affiliation: _____</p> <p>Address: _____</p> <p>Pre-emptive capture training date and instructor: _____</p> <p>Telephone and fax numbers: _____</p> <p>Email: _____</p> <p>Pre-emptive capture permittee: _____</p> <p>* In accordance with 50 CFR 21.31(f)(1)(i), permitted rehabilitators are authorized to temporarily possess healthy, unaffected wildlife for the propose of removing them from imminent danger. However, those activities will need to be authorized in accordance with procedures outlined in this appendix.</p>

Appendix 25, Cont.

V. Tertiary Response Actions: Capture, Handling, Transportation, Stabilization, Rehabilitation, and Release of Oiled Wildlife

- A. Describe each element of the capture, handling, transportation, stabilization, rehabilitation, and release plan for each species or species including: estimated numbers requiring capture, estimated duration of capture activities; location(s) where capture would occur; techniques to be used for capture; estimated number of capture personnel required; equipment, materials (including “OILED-TREATED” bands for migratory birds that could be harvested for subsistence use) and facility (e.g., stabilization and rehabilitation) requirements; and logistics and other technical support required; estimated length of time wildlife would be held; and release plan:

Appendix 25, Cont.

<p>V. Tertiary Response Actions: Capture, Handling, Transportation, Stabilization, Rehabilitation, and Release of Oiled Wildlife, Cont.</p>
<p>B. Information on Stabilization Facility</p> <p>Address: _____</p> <p>Specific location (if not discernible from address): _____</p> <p>Telephone number: _____</p> <p>Fax number: _____</p>
<p>C. Information on Rehabilitation Facility</p> <p>Address: _____</p> <p>Specific location (if not discernible from address): _____</p> <p>Telephone number: _____</p> <p>Fax number: _____</p>
<p>D. Information on Person in Charge of Tertiary Response Activities</p> <p>Name: _____</p> <p>Affiliation: _____</p> <p>Address: _____</p> <p>Training dates and instructor(s) for tertiary response activities: _____</p> <p>Telephone and fax numbers: _____</p> <p>Email: _____</p> <p>Capture, transportation, stabilization, and rehabilitation permittee(s): _____</p>

Appendix 25, Cont.

VI. Requestor Sign-Off*	
Signature of requestor:	_____
Printed name of request:	_____
Title of requestor:	_____
Requestor affiliation (i.e., employer):	_____
Requestor representing:	_____
Sections I-VII of this form submitted to the following wildlife resource agency representatives (print names below):	
_____	, FWS
_____	, NMFS
_____	, ADF&G
Date, time, and method of submittal to FWS:	_____
Date, time, and method of submittal to NMFS:	_____
Date, time, and method of submittal to ADF&G:	_____
* If the request is made by a wildlife resource agency representative (rather than the Responsible Party), the wildlife resource agency representative will sign as the requestor and then will complete the appropriate information in Section VII.	

Appendix 25, Cont.

VII. Wildlife Resource Agency Response to Request*
<p>A. Date and time request received by wildlife resource agency representative(s):</p> <p>Alaska Department of Fish and Game (ADF&G) Name: _____ Date: _____ Time: _____ Phone #: _____</p> <p>Fish and Wildlife Service (FWS) Name: _____ Date: _____ Time: _____ Phone #: _____</p> <p>National Marine Fisheries Service (NMFS) Name: _____ Date: _____ Time: _____ Phone #: _____</p>
<p>B. ADF&G Recommendation/Decision:</p> <p>___ Approve requested program(s) as proposed ___ Approve requested program(s) with the following conditions: ___ Deny requested program(s) for the following reason(s): _____</p> <p>Signature: _____ Time: _____ Date: _____</p>
<p>C. FWS Recommendation/Decision:</p> <p>___ Approve requested program(s) as proposed ___ Approve requested program(s) with the following conditions: ___ Deny requested program(s) of the following reason(s): _____</p> <p>Signature: _____ Time: _____ Date: _____</p>
<p>D. NMFS Recommendation/Decision:</p> <p>___ Approve requested program(s) as proposed ___ Approve requested program(s) with the following conditions: ___ Deny requested program(s) of the following reason(s): _____</p> <p>Signature: _____ Time: _____ Date: _____</p>

* See Appendix 1 for a list of factors to be considered by wildlife resource agency representatives when determining whether to recommend beginning a wildlife capture and rehabilitation program.

THIS PAGE
INTENTIONALLY
LEFT BLANK

Attachment I-3 Polar Bear Interaction Measures

This Attachment to the WRP provides applicable information and measures specific to polar bear interactions. The information is based on Shell's *Polar Bear, Pacific Walrus, and Grizzly Bear Avoidance and Human Encounter/Interaction Plan* available in the Revised Outer Continental Shelf Lease Exploration Plans.

The following three forms are located at the end of this Attachment: Notification Flow Chart, Polar Bear Sighting Report, and Grizzly Bear Observation Form.

General Objectives

The barrier islands and the adjacent coastline are considered important habitat for polar bears. Response activities occurring along the barrier islands in the Chukchi Sea will necessitate a plan that includes the potential for interactions with polar bears and provides measures to mitigate the risks associated with bear encounters. No single critical period has been established for polar bears; however, bears are most sensitive during denning which begins in late November with family groups emerging during late March and early April.

An avoidance and interaction plan particular to interacting with polar bears has been established by Shell. This plan provides the following objectives:

- preventing the association of humans and facilities with food;
- preventing human-bear interactions;
- protecting workers and bears;
- reporting protocol;
- safety and communication;
- risk assessment;
- take actions; and
- plan of cooperation.

Polar Bear Response Strategies

Primary Response

The primary response strategy of preventing the oiling of polar bears should be emphasized; however, disturbing a den during operations could result in the death of a cub and sow. Areas with dens should be avoided by personnel.

Secondary Response

With the approval of the USFWS and FOSC, effective secondary methods include propane cannons and other firearms, and herding polar bears with vehicles, boats, and aircraft. As animals may habituate to the noise of the cannon or firearm, the auditory method may be limited to a short-term deterrence method.

Tertiary Response

Tertiary responses including the capturing and handling of polar bears should give priority to pregnant females and sows with cubs, and should consider the added handling stress and potential for spreading disease. Severely oiled animals should be euthanized and the carcasses disposed of in an approved manner that prevents the impacts to scavengers. Any handling and treatment of individual polar bears must receive authorization from the USFWS prior to the action. Agency contacts are provided in Attachment I-1 of this WRP – Wildlife Response Contacts List.

Polar Bear Avoidance and Encounter Procedures

During response operations, the safety of personnel is the first priority. In preventing human-bear interactions, early detection of bears can avert conflict situations. To ensure the safety of response operation personnel, specific polar bear avoidance and encounter procedures include:

- Survey the response operations area to ensure that bears will not have the opportunity to enter the area without being detected. Personnel should become familiar with the local environment.
- Avoid maternal denning locations during winter work and travel. In the past, dens have been identified in the project area based on the USFWS radio collar-tracking program, suitable habitat exists and caution must be practiced. The purpose is to avoid any disturbance that may cause a sow to abandon her den and expose her cubs to possible harm.
- Assign a designated “bear watch” to ensure continuous monitoring of polar bear activity.
- Check behind doors prior to exiting facilities and be cautious when passing structures that may hide bears.
- Conduct periodic safety sessions to address and elevate awareness of bear avoidance techniques and activities. When applicable, maintain illumination during hours of darkness if workers are present. Be especially alert in dark conditions and areas of poor visibility.
- Alert personnel in the area to alter or stop work activities to avoid interactions. Personnel will be contacted by the designated representative (bear watch) whenever a bear is sighted. Depending on the distance between the bear and the activities, this may mean retreating to the safety of vehicles, emergency shelter, temporary buildings, or other appropriate places of refuge.
- If work assignment requires you to be outside of areas that are secure from bears (e.g., buildings, heavy equipment cabs.) check directly with your supervisor for the latest report from the designated representative bear watcher to find out whether bears or bear sign were reported. Potential at-risk situations include walking between enclosed structures at drill pads, outside vehicles and at various work locations.
- Arrange with your crew foreman to maintain radio or visual contact with the designated bear watch person so that you can be alerted immediately to select a secure place if a bear is sighted. Plan the best route in advance to reach safe locations from your work area.

- Do not approach or crowd bears. Give bears plenty of room. Every bear has a “personal space” – the distance in which they feel threatened. The more distance between personnel and the bear, the better for conflict avoidance.
- Personnel should use the buddy system during response operations. In areas of poor visibility, loud noise should be made prior to walking into the area.
- Never feed bears or any other wildlife. Separate trash to ensure that no food-associated waste is placed in an inappropriate container. Do not take food with you. Consume food and beverages in enclosed areas when possible, and place food-associated waste in dedicated bear-proof trash containers. Do not leave food in unoccupied areas or other unsecured areas.
- Contact the appropriate individual when bear hazing activities are necessary. Individuals should not attempt hazing activities without the appropriate authority.
- Report all bear sightings (including sign, tracks) immediately to the designated Shell representative when you are in a secure location. Do not expose yourself to look at the bear. Do not try to photograph a bear unless you are in a secure location. Early bear detection is essential to limit human/bear encounters.
- Use the Notification Flow Chart, USFWS Polar Bear Sighting Report form, and Oilfield Grizzly Observation Form at the end of this Attachment to report bear sightings.

At-Risk Locations

At-risk locations that may increase the risk of either encountering or attracting a polar bear include:

- access roads;
- coastal bluffs;
- food consumption areas;
- blind areas that are obscured by facilities, equipment, or other obstacles; and
- exits from facilities or structures.

At-Risk Situations and Activities

At-risk situations and activities that may increase the risk of either encountering or attracting a polar bear include:

- response operations;
- field support;
- dark/unlit and visually obscured area; and
- activities associated with odor.

Take Actions

Early detection and personnel awareness will reduce chance encounters with a polar bear. If a bear remains on site for an extended period of time, consult the USFWS contact (Craig Perham) or ADF&G contact (Dick Shideler) for advice. Firearms with rubber bullets, cracker shells and

other noisemakers will be available to provide deliberate and intentional harassment of bears to ensure worker safety. Prior to any hazing activity, ensure that the appropriate agency authorization has been obtained.


Despite preventive actions, if a “take” occurs to protect a human life the following information must be recorded and actions taken. A designated and trained bear watch is responsible for completing the following measures:

1. Record all details of the event including time, exact location, behavior of bear, preventive measures followed, and other details provided on the report form;
2. Record all witness statements; and
3. Immediately notify Craig Perham with USFWS at (907) 786-3810 [Alternate office number (907) 786-3800]. If there is a lethal “take”, transport the entire animal carcass to Deadhorse for sealing and processing under the direction of a responsible USFWS agent designee. USFWS will determine disposition of useable meat (e.g., donation to a Native village).

SHELL

BEAR AVOIDANCE AND INTERACTION PLAN

NOTIFICATION FLOW CHART

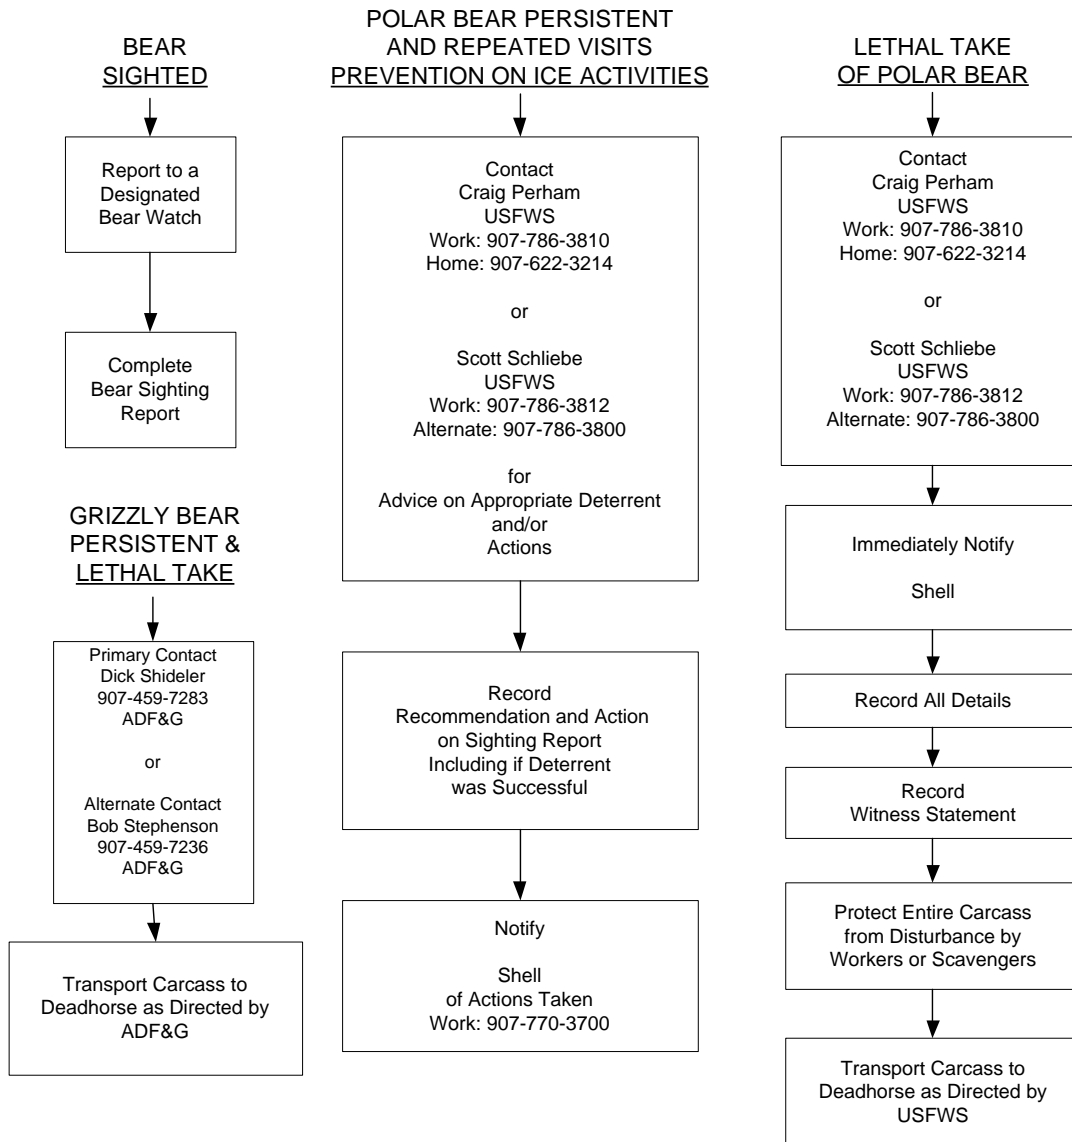

United States Department of the Interior

FISH AND WILDLIFE SERVICE
1011 E. Tudor Road
Anchorage, Alaska 99503-6199

POLAR BEAR SIGHTING REPORT

Date: _____ Observer name: _____
Time: _____ Contact number/email: _____

Location: _____

Latitude: _____ Longitude _____ Datum: _____

Weather conditions: Fog _____ Snow _____ Rain _____ Clear _____ Temperature _____ F/C

Wind speed _____ mph/kts Wind direction _____ Visibility: _____
Fair
Good
Excellent

Number of bears:

_____ Adult M/F _____ Sow/cub(s)
_____ Sub-adult _____ Sow/yearling(s)
_____ Unknown _____ Sow/2YO(s)

Estimated distance of bear(s) from personnel _____ (meters) **and facility:** _____ (meters)

Possible attractants present: _____

Bear behavior: Curious _____ Aggressive _____ Predatory _____ Passing through _____ Other _____

Description of encounter: _____

Duration of encounter: _____

Deterrents used/distance:

_____ Vehicle _____ Bean bag _____ Other
_____ Crackershell _____ Horn/siren
_____ Rubber bullet _____ Spotlight/Headlight

Agency Contacts	
USFWS Craig Perham Phone (907) 786-3810 Fax (907) 786-3816	Time _____ Date _____
ADF&G Dick Shideler Phone (907) 459-7283 Fax (907) 456-3091	Time _____ Date _____

Bear ID #: _____ (ADF&G Only)

OILFIELD GRIZZLY OBSERVATION FORM

OBSERVER: _____ COMPANY/AGENCY: _____

OBSERVATION DATE _____ TIME: Start _____ Stop _____

OBSERVATION FROM: Vehicle Ground Building Other: _____

Observer's distance from bear: _____ Meters

GENERAL LOCATION: Deadhorse PB East PB West Kuparuk Endicott Milne Point
 Lisburne Point McIntyre TAPS (MP #): _____

Other (latitude/longitude if known): _____

SPECIFIC LOCATION (Example: 500 meters North of Spine Road at Put R):

_____ meters _____ (direction) of _____ (facility name)

Dumpster present: Yes No Unknown

WEATHER: _____ °F Direction of wind: _____ at _____ mph

Clear/Partly Cloudy Rain Fog Snow

BEAR IDENTIFICATION: Earflag Color (Note: "Right" and "left" of bear, not observer.)

Right _____ Left _____ Natural markings (scars, torn ears, etc.): _____

OTHER BEARS PRESENT: None Cubs # of cubs _____ # of yearlings _____ # of other _____

BEAR ACTIVITY: When first seen, the bear was: Resting Feeding (natural food) Feeding (garbage)

Feeding/Traveling Traveling Other: _____

BEAR'S REACTION TO OBSERVER: Ignore Approach Avoid

Were other people in the area (i.e., not with observer)? Yes No Unknown

Bear's reaction to other people: Ignore Approach Avoid

COMMENTS: _____

DETERENCE ACTION TAKEN? Yes No

If yes, did you use Horn Siren Plastic Slugs Cracker Shell Firecracker

Birdshot Other (describe): _____

Bears reaction: Ignore Approach Withdraw

ADDITIONAL REMARKS: _____

Please return to:

Dick Shideler, Alaska Department of Fish and Game, 1300 College Road, Fairbanks, Alaska
99701, Oilfield Security or Environment

THIS PAGE
INTENTIONALLY
LEFT BLANK

TABLE OF CONTENTS

APPENDIX J	FORMS	J-1
J.1	WEATHER REPORT	J-1
J.2	NOTIFICATION REPORT	J-3
J.3	INCIDENT BRIEFING (ICS FORM 201)	J-5
J.4	RESPONSE OBJECTIVES FORM (ICS FORM 202)	J-10
J.5	SITE SAFETY AND HEALTH PLAN (ICS FORM 208)	J-12
J.6	INDIVIDUAL LOG (ICS FORM 214A)	J-15

The ICS forms listed above constitute the initial IAP. As the incident progresses into a project phase, additional ICS forms would be used as appropriate.

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

APPENDIX J FORMS

J.1 WEATHER REPORT

Purpose: The Weather Report form provides the IC (the Command and General Staffs assuming command of the incident) with basic information regarding current incident specific weather conditions, forecast for the next 24-hr and 48-hr periods. Personnel or responders at the incident location should provide real time current weather data. It also serves as a permanent record of the initial response to the incident.

Preparation: The Planning Section prepares the briefing from data gathered from NOAA's National Weather Service and other sources. The information will be provided to the Situation Unit Leader so he may maintain the information on his static display.

Distribution: After the initial briefing of the IC and General Staff members, the Incident Briefing is duplicated and distributed to the Command Staff, Section Chiefs, Branch Directors, Division/Group Supervisors, and appropriate Planning and Logistics Section Unit Leaders.

ITEM	ITEM TITLE	INSTRUCTIONS
1.	Incident Name	Enter the name assigned to the incident
2.	Date/Time Prepared	Enter date & time prepared (e.g. 09/17/1996 1500 hr)
3.	Operational Period	Enter the date and time interval for which the form applies (e.g. 0600 09/17/2000 to 0600 09/18/2000)
4.	Prepared By	Enter the name of the person completing the form
5.	Wind Speed	Enter wind speed. (Indicate either knots or mph)
6.	Wind Direction	Enter the direction from which the wind is blowing
7.	Air Temperature	Enter on the air temperature in °F
8.	Barometric Pressure	Enter current barometric pressure in inches
9.	Humidity	Enter current humidity in percent
10.	Visibility	Enter visibility in miles. (Use data from surveillance aircraft)
11.	Ceiling	Enter ceiling in feet. (Use data from surveillance aircraft)
12.	High Tide (time)	Enter time for next high tide for current operational period (24 hr)
13.	High Tide (height)	Enter height of next high tide for current operational period (ft)
14.	Sunrise	Enter time of sunrise for current operational period
15.	Wave Height (feet)	Enter the wave height in feet (e.g., 1 to 3 ft)
16.	Wave Direction	Enter the direction, which the waves are moving
17.	Swell Height	Enter the swell height (ft)
18.	Swell Interval	Enter the swell interval (sec)
19.	Current Speed	Enter the speed of water current (Indicate either knots or mph).
20.	Current Direction	Enter the direction which the water current is moving
21.	Water Temperature	Enter the water temperature in °F
22.	Low Tide (time)	Enter time for next low tide for current operational period (24-hr)
23.	Low Tide (height)	Enter height of next low tide for current operational period (ft)
24.	Sunset	Enter time of sunset for current operational period
25.	Notes	Enter notes (e.g. thunderstorm activity, wind shift, front movement) about weather data current operational period

Weather Report			
Incident:		Prepared:	
Period: ___/___/___:___ to ___/___/___:___		Version Name:	
Present Conditions			
Wind Speed:		Wave Height:	
Wind Direction From The:		Wave Direction:	
Air Temperature:		Swell Height:	
Barometric Pressure:		Swell Interval:	
Humidity:		Current Speed:	
Visibility:		Current Direction Toward:	
Ceiling:		Water Temperature:	
Next High Tide (Time):		Next Low Tide (Time):	
Next High Tide (Height):		Next Low Tide (Height):	
Sunrise:		Sunset:	
Notes:			
24-Hour Forecast			
Sunrise:		Sunset:	
High Tide (Time):		High Tide (Time):	
High Tide (Height):		High Tide (Height):	
Low Tide (Time):		Low Tide (Time):	
Low Tide (Height):		Low Tide (Height):	
Notes:			
48-Hour Forecast			
Sunrise:		Sunset:	
High Tide (Time):		High Tide (Time):	
High Tide (Height):		High Tide (Height):	
Low Tide (Time):		Low Tide (Time):	
Low Tide (Height):		Low Tide (Height):	
Notes:			

J.2 NOTIFICATION REPORT

Purpose: The Notification Report is used to document each government entity and NGO notified and briefed on the incident.

Preparation: The company representative or the Liaison Officer in the Command Staff prepares the Notification Report.

Distribution: The Notification Report is a critical part of the incident briefing and the IAP. When updated, the Situation Unit Leader will post/update the Situation Display in the Command Post.

ITEM	ITEM TITLE	INSTRUCTIONS
1.	Incident	Enter the name assigned to the incident
2.	Version Name	
3.	Period	Enter the Operational Period date and time
4.	Prepared By	Enter name and title of the person preparing the form and date/time (Military Time)
5.	Organization Notified	Enter the name of the Organization notified
6.	Phone Number	Enter the phone number of the Organization notified
7.	Date/Time	Enter the date and time the notification is made
8.	Person Contacted	Enter the name of the person notified
9.	Person Contacted Email	Enter the email address of the person notified
10.	Case Number	Enter the Case Number where applicable (e.g. NRC Case Number)
11.	Follow Up	Circle Yes or No if follow up is required
12.	ETA On Site	Enter the estimated time of arrival of the organization if applicable
13.	Notified By	Enter the name of the person making the notification

Notification Status Report									
Incident: _____				Prepared by: _____					at: _____
Period: ___/___/___ : ___ to ___/___/___ : ___				Version Name: _____					
Organization Notified	Phone	Date /Time Notified	Person Contacted	Person Contacted Email	Case No.	Follow Up	ETA On Site	Notified By	
Notes: _____									
Notes: _____									
Notes: _____									
Notes: _____									
Notes: _____									
Notes: _____									

J.3 INCIDENT BRIEFING (ICS FORM 201)

Purpose: The Incident Briefing form provides the IC, the Command Staff and General Staff assuming command of the incident with basic information regarding the incident situation and the resources allocated to the incident. It also serves as a permanent record of the initial response to the incident.

Preparation: The Initial IC prepares the briefing form for presentation to the relieving IC along with a more detailed oral briefing.

Distribution: After the initial briefing of the IC and General Staff members, the Incident Briefing is duplicated and distributed to the Command Staff, Section Chiefs, Branch Directors, Division/Group Supervisors, and appropriate Planning and Logistics Section Unit Leaders. The sketch map and summary of current action portions of the briefing form are given to the Situation Unit while the Current Organization and Resources Summary portion are given to the Resources Unit.

ITEM	ITEM TITLE	INSTRUCTIONS
1.	Incident	Enter the name assigned to the incident
2.	Prepared By	Enter name of person completing form and the date & time prepared (e.g. 09/17/1996 1500 hr)
3.	Period	Enter the date and time interval of the operational period for which the form applies (e.g. 0600 09/17/2000 to 0600 09/18/2000)
4.	Version Name	
5.	ICS 201-1 Map Sketch	Show the Areas of Operations, the incident site, overflight results, trajectories, impacted shorelines, or other graphics depicting situation and response status on a sketch or attached map
6.	ICS 201-2 Summary of Current Actions	Brief paragraph on: 1. What, when, and how the incident occurred 2. Surveillance & weather information 3. Overall initial response objectives 4. Timeline of major events or actions that have taken place
7.	ICS 201-3 Current Organization	Enter on the organization chart the names of the individuals assigned to each position. Modify the chart as necessary
8.	ICS 201-4 Resources Summary	Track the following information about the resources allocated to the incident Name of supplier providing the resource 2. Resource Type (e.g. fire truck, boom, skimmer) 3. Description (e.g. size, name, capacity) 4. Quantity or amount of resource(s) 5. Area of Operation – destination of the resource (e.g. staging area, division, group, task force) 6. Status of each resource (e.g. Standby, En-route with Estimated time of arrival, At Staging, Assigned, & Out of Service)

ICS 201-1 – Incident Briefing Map/Sketch	
Incident:	Prepared by: _____ at: _____
Period: ____/____/____:____ to ____/____/____:____	Version Name: _____

ICS 201-3 –Current Organization	
Incident:	Prepared by: _____ at: _____
Period: ____/____/____ : ____ to ____/____/____ : ____	Version Name: _____

<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;">Unified Command</div>	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Federal _____</td> <td style="width: 50%;"></td> </tr> <tr> <td>State _____</td> <td></td> </tr> <tr> <td>Incident Commander _____</td> <td></td> </tr> <tr> <td>_____</td> <td></td> </tr> <tr> <td>_____</td> <td></td> </tr> <tr> <td>Safety Officer _____</td> <td></td> </tr> <tr> <td>Liaison Officer _____</td> <td></td> </tr> <tr> <td>Information Officer _____</td> <td></td> </tr> </table>	Federal _____		State _____		Incident Commander _____		_____		_____		Safety Officer _____		Liaison Officer _____		Information Officer _____	
Federal _____																	
State _____																	
Incident Commander _____																	

Safety Officer _____																	
Liaison Officer _____																	
Information Officer _____																	

OPS Section Chief	Planning Section Chief	Logistics Section Chief	Finance Section Chief
Branch/Div./Grp/TF	Situation Unit Leader		
Branch/Div./Grp/TF	Resource Unit Leader		
Branch/Div./Grp/TF	Documentation Unit		
Branch/Div./Grp/TF	Environmental Unit		
Branch/Div./Grp/TF			
Branch/Div./Grp/TF			

J.4 RESPONSE OBJECTIVES FORM (ICS FORM 202)

Purpose: The Response Objectives Form describes the basic incident strategy, control objectives, and safety considerations for use during the next operational period.

Preparation: The Response Objectives Form is completed by the Planning Section Chief following each formal Planning Meeting conducted in preparation for the IAP.

Distribution: The Response Objectives Form will be reproduced with the IAP and given to all supervisory personnel at the Section, Branch, Division/Group and Unit leader levels. NOTE: ICS 202, Response Objectives, serves as part of the IAP, which is not considered complete until attachments are included.

ITEM	ITEM TITLE	INSTRUCTIONS
1.	Incident	Enter the name assigned to the incident
2.	Version Name	
3.	Period	Enter the date and time interval of the operational period for which the form applies (e.g. 0600 09/17/2000 to 0600 09/18/2000)
4.	Prepared By	Enter the name of the Planning Section Chief or person completing the form and the date & time prepared (e.g. 09/17/1996 1500 hr)
5.	Overall Incident Objective(s)	What you plan to do in priority order. Enter short, clear and concise statements of the objectives for managing the response. The overall incident objectives usually apply for the duration of the incident. (e.g. Contain and Recover Spilled Material).
6.	Tactical Objectives for specific Operational Period	How you plan to accomplish objectives. Enter short, clear and concise statements of the objectives for the incident response for this operational period. Include alternatives (e.g. Deploy containment boom at appropriate collection areas).
7.	Safety Messages for the specified Operational Period	Enter information such as known safety hazards and specific precautions to be observed during this operational period. If available, a safety message should be referenced and attached.

ICS 202 – General Response Objectives		
Incident:	Prepared by: _____ at: _____	
Period: ___/___/___ : ___ to ___/___/___ : ___	Version Name: _____	
Overall and Tactical Objectives		
	Assigned to:	Status
1. Ensure the Safety of Citizens and Response Personnel		
<input type="checkbox"/> 1a. Identify hazard(s) of spilled material		
<input type="checkbox"/> 1b. Establish site control (hot zone, warm zone, cold zone, & security)		
<input type="checkbox"/> 1c. Consider evacuations if needed		
<input type="checkbox"/> 1d. Establish vessel and/or aircraft restrictions		
<input type="checkbox"/> 1e. Monitor air in impacted areas		
<input type="checkbox"/> 1f. Develop site safety plan for personnel & ensure safety briefings are conducted		
2. Control the Source of the Spill		
<input type="checkbox"/> 2a. Complete emergency shutdown		
<input type="checkbox"/> 2b. Conduct firefighting		
<input type="checkbox"/> 2c. Initiate temporary repairs		
<input type="checkbox"/> 2d. Transfer and/or lighter product		
<input type="checkbox"/> 2e. Conduct salvage operations, as necessary		
3. Manage a Coordinated Response Effort		
<input type="checkbox"/> 3a. Complete or confirm notifications		
<input type="checkbox"/> 3b. Establish a unified command organization and facilities (command post, etc.)		
<input type="checkbox"/> 3c. Ensure local and tribal officials are included in response organizations		
<input type="checkbox"/> 3d. Initiate spill response IAP		
<input type="checkbox"/> 3e. Ensure mobilization & tracking of resources & account for personnel & equipment		
<input type="checkbox"/> 3f. Complete documentation		
4. Maximize Protection of Environmentally-Sensitive Areas		
<input type="checkbox"/> 4a. Implement pre-designated response strategies		
<input type="checkbox"/> 4b. Identify resources at risk in spill vicinity		
<input type="checkbox"/> 4c. Track oil movement and develop spill trajectories		
<input type="checkbox"/> 4d. Conduct visual assessments (e.g., overflights)		
<input type="checkbox"/> 4e. Development/implement appropriate protection tactics		

J.5 SITE SAFETY AND HEALTH PLAN (ICS FORM 208)

Purpose: The SSHP is a site-specific document required by state and federal OSHA regulations and specified in the Area Contingency Plan. The SSHP, at minimum addresses, includes, or contains the following elements: health and safety hazard analysis for each site task or operation, comprehensive operations work plan, personnel training requirements, PPE selection criteria, site-specific medical monitoring requirements, air monitoring plan, site control measures, confined space entry procedures (if needed), pre-entry briefings (tailgate meetings), pre-operations commencement health and safety briefings for all incident participants, and quality assurance of SSHP effectiveness,

Preparation: The Safety Officer prepares the SSHP with input from the Industrial Hygienist and Medical Unit Leader.

Distribution: The SSHP is distributed to the Operations Section Chief for implementation and promulgation to all operational groups and responding agencies. A copy is provided to the IC, the Command Staff, and the General Staff.

ICS 208 – Site Safety Plan	
Incident:	Prepared by: _____ at: _____
Period: ___/___/___ : ___ to ___/___/___ : ___	Version Name: _____
Revision: _____	
Applies To Site: _____	
Products: _____ (Attach MSDS)	
SITE CHARACTERIZATION	
Water: _____	Wave Direction: _____
Wave Height: _____	Current Direction: _____
Current Speed: _____	Use: _____
Land: _____	Temp: _____
Weather: _____	Wind Direction: _____
Wind Speed: _____	_____
Pathways for Dispersion:	
Site Hazards	
<input type="checkbox"/> Boat Safety	<input type="checkbox"/> Fire, explosion, in-situ burning
<input type="checkbox"/> Chemical hazards	<input type="checkbox"/> Heat stress
<input type="checkbox"/> Cold Stress	<input type="checkbox"/> Helicopter operations
<input type="checkbox"/> Confined Spaces	<input type="checkbox"/> Lifting
<input type="checkbox"/> Drum handling	<input type="checkbox"/> Motor vehicles
<input type="checkbox"/> Equipment operations	<input type="checkbox"/> Noise
<input type="checkbox"/> Electrical operations	<input type="checkbox"/> Overhead/buried utilities
<input type="checkbox"/> Fatigue	<input type="checkbox"/> Plants/wildlife
<input type="checkbox"/> Other	<input type="checkbox"/> Other
_____	_____
<input type="checkbox"/> Pump hose	<input type="checkbox"/> Slips, trips, and falls
<input type="checkbox"/> Steam and hot water	<input type="checkbox"/> Trenching/Excavation
<input type="checkbox"/> UV Radiation	<input type="checkbox"/> Visibility
<input type="checkbox"/> Weather	<input type="checkbox"/> Work near water
<input type="checkbox"/> Other	<input type="checkbox"/> Other
_____	_____
Air Monitoring	
%O₂: _____	% LEL: _____
ppm H₂S: _____	ppm Benzene: _____
Other (Specify): _____	_____
CONTROL MEASURES	
Engineering Controls	
<input type="checkbox"/> Source of release secured	<input type="checkbox"/> Valve(s) closed
<input type="checkbox"/> Site secured	<input type="checkbox"/> Facility shut down
<input type="checkbox"/> Energy source locked/tagged out	<input type="checkbox"/> Other _____
Personal Protective Equipment	
<input type="checkbox"/> Impervious suit	<input type="checkbox"/> Respirators
<input type="checkbox"/> Inner gloves	<input type="checkbox"/> Eye protection
<input type="checkbox"/> Outer gloves	<input type="checkbox"/> Personal floatation
<input type="checkbox"/> Flame resistance clothing	<input type="checkbox"/> Boots
<input type="checkbox"/> Hard hats	<input type="checkbox"/> Other _____
Additional Control Measures	
<input type="checkbox"/> Decontamination	<input type="checkbox"/> Stations established
<input type="checkbox"/> Sanitation	<input type="checkbox"/> Facilities provided – OSHA 29 CFR 1910.120n
<input type="checkbox"/> Illumination	<input type="checkbox"/> Facilities provided – OSHA 29 CFR 1910.120m
<input type="checkbox"/> Medical Surveillance	<input type="checkbox"/> Provided – OSHA 29 CFR 1910.120fq

ICS 208 – Site Safety Plan		
Incident:	Prepared by: _____ at: _____	
Period: ___/___/___ : ___ to ___/___/___ : ___	Version Name: _____	
WORK PLAN		
<input type="checkbox"/> Booming <input type="checkbox"/> Skimming <input type="checkbox"/> Vac trucks <input type="checkbox"/> Pumping <input type="checkbox"/> Excavation <input type="checkbox"/> Heavy equipment <input type="checkbox"/> Sorbent pads <input type="checkbox"/> Patching <input type="checkbox"/> Hot work <input type="checkbox"/> Appropriate permits used <input type="checkbox"/> Other		
TRAINING		
<input type="checkbox"/> Verified site workers trained per OSHA 29 CFR 1920.120		
ORGANIZATION		
<u>Title</u>	<u>Name</u>	<u>Telephone/Radio</u>
Incident Commander:	_____	_____
Deputy Incident Commander:	_____	_____
Safety Officer:	_____	_____
Public Affairs Officer:	_____	_____
Other:	_____	_____
EMERGENCY PLAN		
<input type="checkbox"/> Alarm system: _____		
<input type="checkbox"/> Evacuation plan: _____		
<input type="checkbox"/> First aid location: _____		
Notified		
<input type="checkbox"/> Hospital	_____	Phone: _____
<input type="checkbox"/> Ambulance	_____	Phone: _____
<input type="checkbox"/> Air ambulance	_____	Phone: _____
<input type="checkbox"/> Fire	_____	Phone: _____
<input type="checkbox"/> Law enforcement	_____	Phone: _____
<input type="checkbox"/> Emergency response/rescue	_____	Phone: _____
PRE-ENTRY BRIEFING		
<input type="checkbox"/> Initial briefing prepared for each site		
INCLUDING ATTACHMENTS/APPENDICES		
<u>Attachments</u> <input type="checkbox"/> Site Map <input type="checkbox"/> Hazardous Substance Information Sheets <input type="checkbox"/> Site Hazards <input type="checkbox"/> Monitoring Program <input type="checkbox"/> Training Program <input type="checkbox"/> Confined Space Entry Procedure <input type="checkbox"/> Safe Work Practices for Boats <input type="checkbox"/> PPE Description <input type="checkbox"/> Decontamination <input type="checkbox"/> Communication and Organization <input type="checkbox"/> Site Emergency Response Plan	<u>Appendices</u> <input type="checkbox"/> Site Safety Program Evaluation Checklist <input type="checkbox"/> Confined Space Entry Checklist <input type="checkbox"/> Heat Stress Consideration <input type="checkbox"/> Cold Stress and Hypothermia Consideration <input type="checkbox"/> First Aid for Bites, Stings, and Poisonous Plant Contact <input type="checkbox"/> Safe Work Practice for Oily Bird Rehabilitation <input type="checkbox"/> SIPI Site Pre-Entry Briefing <input type="checkbox"/> Personnel Tracking System	

J.6 INDIVIDUAL LOG (ICS FORM 214A)

ICS 214a – Individual Log	
Incident: _____	Prepared by: _____ at: _____
Period: ____/____/____:____ to ____/____/____:____	Version Name: _____
Activity Log	
Date/Time	Events/Notes

TABLE OF CONTENTS

APPENDIX K OIL AND DEBRIS DISPOSAL PROCEDURES K-1

K.1	INTRODUCTION.....	K-1
K.2	WASTE CATEGORIES	K-2
K.3	COLLECTION AND SEGREGATION OF RECOVERED OIL	K-2
K.4	OIL AND DEBRIS SEPARATION AND DISPOSAL.....	K-3
K.5	TEMPORARY STORAGE OF RECOVERED OIL AND WASTE.....	K-3
K.6	DISPOSAL REGULATIONS.....	K-4
K.7	DISPOSAL TRANSPORTATION AND DESIGNATED SITES	K-5

FIGURES

Figure K-1	Shell Waste Management Plan Template	K-6
------------	--	-----

TABLES

Table K-1	Onshore Waste Disposal Facilities and Disposal Methods.....	K-5
Table K-2	Oil/ Water/ Debris Separation Strategies.....	K-11
Table K-3	Temporary Storage Methods	K-12

THIS PAGE
INTENTIONALLY
LEFT BLANK

APPENDIX K OIL AND DEBRIS DISPOSAL PROCEDURES

K.1 INTRODUCTION

Shell's waste management procedures for oil and debris that would be generated during an oil spill response are described in this Appendix.

At the time of the spill response, the Operations Section Chief and EU Leader will jointly determine the reuse, recycling, or disposal method(s) best suited to the state of the oil, the degree of contamination, and the logistics involved in these operations. Application for agency approvals are completed before the determined method of disposal is implemented.

Temporary storage of oil, oily waste, and debris recovered during a spill response may be provided by tanks located on the OSR vessel, VOSS and (or) OSR barge. The spill location or other logistical concerns may also require storage of oil, oily waste, and debris in smaller, more portable containers that can be brought to the scene via helicopter, or small boats and mini-barges.

Recovered fluids stored on board the OST (TF-3) will be disposed of either at Shell Group refineries or other third-party processors, in accordance with Shell environmental policy, and relevant local laws and regulations.

Non-liquid oily wastes are classified and disposed of according to classification. Non-oily wastes are classified and disposed of accordingly.

Disposal and processing of recovered fluids transported to Prudhoe Bay will be in accordance with ACS Tactics D1 through D5. In the event these fluids are taken to Prudhoe Bay, recovered fluids would be handled in accordance with Ballot Agreements.

The collection, storage, transportation, treatment, and disposal of waste will be conducted in a manner that is both safe and environmentally sound. Procedures are in place to insure that all laws and regulations are followed and that necessary permits are obtained in conjunction with waste management.

Wastes generated from an oil spill response will be handled in accordance with federal and state hazardous waste regulations and company policy. Most of the waste collected during response operations will be classified as exploration and production exempt waste.

However, crude oil contains benzene, which can be considered hazardous waste under the RCRA toxicity characteristic rule. The hazardous waste characteristics include ignitability, reactivity, corrosivity and toxicity. Oily waste will be tested before a disposal option is selected. Benzene will normally volatilize rapidly from a spill. If oily waste is determined to be hazardous under RCRA, it will be labeled accordingly and sent to a permitted facility for disposal.

In the event of a spill, a site-specific waste management plan will be developed to address the equipment, staffing, and other support necessary to address waste management issues under the known conditions of the spill. The template for the Shell Waste Management Plan (which will be attached to the IAP) is provided in Figure K-1. If an oil spill occurs during Shell's Chukchi Sea exploration operations, wastes may be generated offshore, near shore, and onshore.

K.2 WASTE CATEGORIES

Oil spill response operations may generate several types of wastes including those listed below. Waste categories are also described in Figure K-1, Shell Waste Management Plan Template.

- **Oily Liquid Wastes**
 - recovered or skimmed mixtures
 - used engine oils, hydraulic fluids
 - fuels contaminated with water and solids
 - engine room bilge/ballast waters from vessels
 - wash waters from cleaning boats, equipment, and gear
 - other oily waters
- **Non-Oily Liquid Wastes**
 - sewage, liquid human waste (gray and black waters)
- **Oily Solid Wastes**
 - sand, gravel, tar balls
 - asphalt patches
 - sludge
 - sorbent pads/boom/wood
 - shoreline vegetation
 - oily personnel gear and clothing
 - damaged response equipment and gear
 - empty drums and containers
- **Non-Oily Solid Wastes**
 - domestic trash and garbage
 - bagged human waste
 - discarded equipment and construction materials

Wildlife carcasses and contaminated fish may be retained by trustee agencies. Once they are released or determined to be solid wastes, tier disposal will comply with applicable regulations.

K.3 COLLECTION AND SEGREGATION OF RECOVERED OIL

- Oil and emulsion generated from offshore oil recovery will be transferred from skimmer vessels with storage tanks or ORV barges to the OST for storage and ultimate disposal.
- Oil and emulsion from nearshore oil recovery will be collected with shallow draft vessels and/or mini-barges. Mini-barge(s) would be used for temporary storage of oily liquid wastes.
- Oil and emulsion from shoreline oil recovery will be collected with skimmer systems and pumped into holding tanks. Each tank's oil and free-water volumes will be gauged and logged, and then pumped to mini-barges or other storage containers. Solid waste and debris will be removed and brought to a segregated interim storage area.

K.4 OIL AND DEBRIS SEPARATION AND DISPOSAL

Oil spill cleanup offshore using mechanical recovery will involve the further handling of recovered oil and oiled materials. These should be transported from offshore to the staging area for proper handling or from onshore directly to the appropriate reclamation/disposal site.

Figure K-1 depicts separation methods for recovered oil/water/debris. The figure also depicts methods that may be employed to separate free and/or emulsified water from the oily liquid waste.

K.5 TEMPORARY STORAGE OF RECOVERED OIL AND WASTE

Figure K-2 depicts the temporary storage methods for recovered oil/water/debris for onshore or offshore operations.

- Oil recovered at sea via skimmer(s) is transferred to portable tanks on board recovery vessels or barges.
- The skimmer tanks allow for gravity separation of the oil from the water. The separated water is transferred through a hose and discharged forward of the recovery pump. This method is called “decanting.” This process is vital to the efficient mechanical recovery of spilled oil because it allows maximum use of limited storage capacity, thereby increasing recovery operations. Approval must be obtained from the USCG and respective state agencies by the IMT Liaison Officer prior to decanting.
- Recovered fluids stored on board the OST will be disposed of at a Shell Group refinery or a third-party processor.
- Oiled debris collected at sea requires specific handling. Contaminated materials should be placed in leak proof, sealable containers on the recovery vessels and transported to appropriate facilities for processing, recycling, or disposal.
- Oil recovered from onshore areas will typically contain substantial quantities of water and debris. Excess water, sand, and other beach materials greatly increase the quantity of waste and its associated cost for transportation, processing, and disposal. To remedy this, different methods can be employed at the cleanup site to separate oiled debris from excess materials that may be returned to the shoreline. Using screens, filters, conveyor systems and settling tanks, oil/water mixtures can be drained from debris and collected in temporary containers for further treatment.
- Clean sand and beach materials can be separated from oiled materials.
- Oil spills would occur in remote areas that are some distance from transportation routes and storage facilities. In these situations, temporary on-scene storage arrangements may be required. Oil may be stored in tanks, 55-gal drums, bladders, or empty fuel storage tanks. Such tanks permit decanting of water from the oil. Pits should be lined with plastic sheeting to prevent oil leakage and subsequent soil penetration.
- Contaminated gravel from cleanup operations would be temporarily stored on site and later transported by vessel or aircraft to off site designated waste treatment or disposal facility(ies).

K.6 DISPOSAL REGULATIONS

- Oiled Materials – If these materials have not contacted extraneous substances, they will be disposed of at a Shell-approved disposal site.
- Oil and oily wastes that are contaminated or excessively weathered will require transport to an approved disposal site. Any transport or disposal of material that is considered hazardous waste must follow the requirements of the RCRA.
- Regulatory Guidelines
 - All wastes scheduled for disposal at a Prudhoe Bay oilfield facility, with prior written approval from the facility owner, will be handled in accordance with the requirements of the EPA, ADEC, and AOGCC regulations and policy guidelines. These regulations and guidelines have been synthesized into an operational document titled: *Alaska Waste Disposal and Reuse Guide* (“Red Book”) prepared by BP Exploration (Alaska) Inc. and CPAI to ensure consistency in waste handling practices on the North Slope. This includes directions for using the North Slope manifest, and other requirements for third-party contractors using BP or CPAI facilities.
 - Only state-licensed hazardous material haulers are used to transport recovered oil. These licensed waste haulers must have an EPA ID number and a state transporter ID number.
 - When completing the manifest, Shell Exploration and Production is listed in the manifest as the generator. The manifest should be signed by the designated Shell representative, and marked with the statement: “This material is being disposed of by Shell as part of a response action in accordance with the National Oil and Hazardous Substances Pollution Contingency Plan (40 CFR 300).”
 - Recovered waste oil must be properly packaged and labeled prior to transport in accordance with 40 CFR 262.30.
 - All wastes shipped off site for disposal must be transported in compliance with applicable regulations. These include the RCRA regulations in 40 CFR 262 and 263, the DOT Hazardous Materials Regulations in 49 CFR 171 through 178, and applicable ADEC regulations. Shell will ensure shipments of waste collected during spill response operations are transported in appropriate containers to eliminate secondary releases during transport. If the nature of the waste precludes packaging in the required container, the IC should request emergency exemptions from the regulations following procedures outlined in 49 CFR 107.
 - Waste haulers will use only state-certified disposal sites.
 - Unit personnel must track the Hazardous Waste Manifest and retain the appropriate records per 40 CFR 262.40. Unit personnel should receive a signed copy of the manifest from a designated disposal facility within the specified time limits.

K.7 DISPOSAL TRANSPORTATION AND DESIGNATED SITES

- Transportation of oil and oily waste at sea may be accomplished via barge, OSV, or tanker.
- Transportation of oil or oily waste from shoreline locations will be by shallow-draft vessel, towed bladders, or air (helicopter sling-loads of small containers, if approved).
- Oil or oily debris recovered from a spill site may only be disposed of at authorized sites. A list of these authorized sites is maintained by Shell HSE. Liquid waste generated as a result of the spill response may be disposed of at a Shell Group refinery. Liquid wastes, not disposed of at Shell facilities, and solid wastes will be disposed of at site(s) and by the same transportation method(s) as specified in Table 13.d-1 of the Revision 1 of Shell’s Chukchi Sea EP (summarized in Table K-1 below), which includes both Shell- and EPA-approved disposal sites(s). Shell will only send recovered waste to disposal facilities that have been audited by Shell and are in Shell’s approved list. Because Shell continually checks these facilities, the list is updated regularly and is available to the IMT members.

**Table K-1
 Onshore Waste Disposal Facilities and Disposal Methods**

Name/Location of Disposal Facilities	Disposal Method
Waste Management Inc. Columbia Ridge Recycling & Landfill, Arlington, OR – or –	Land-farmed and/or incinerated
Dutch Harbor Municipal Landfill Dutch Harbor, AK	
Waste Management Inc. Columbia Ridge Recycling & Landfill, Arlington, OR – or –	Hazardous waste disposal in Class 1 injection well or approved treatment/ disposal site
Emerald Alaska, Anchorage - to Emerald Services, Seattle, WA – or –	
Clean Harbor Environmental Services Aragonite, UT	
Waste Management Inc. Columbia Ridge Recycling & Landfill, Arlington, OR – or –	Land-farmed and/or incinerated
Emerald Alaska, Anchorage - to Emerald Services, Seattle, WA – or –	
Clean Harbor Environmental Services Aragonite, UT	

Figure K-1 Shell Waste Management Plan Template

Always work safely in an environmentally sound manner. Minimize waste. Consider waste management and generation in all actions. Never mix waste; always segregate. Report any accident or incident to your supervisor immediately. Reference the Waste Management Plan for the specific process required for each waste type.

A. INTRODUCTION

Incident Name: _____
Date of Incident: _____
Time of Incident: _____
Individual in Charge of Site: _____

B. SITE DESCRIPTION

Location of Site: _____

Description of Site Including Surrounding Area (e.g., beach, marsh) - attach map: _____

Access/Limitations (e.g., highway/bridge limitations, boat/shallow water) - attach map: _____

Any Additional Information / Considerations: _____

Present Weather Conditions: _____

12-hour Forecast: _____

24-hour Forecast: _____

C. SITE-SPECIFIC SAFETY PLAN

This plan must be completed and attached before starting any physical work. One plan must be completed for each waste handling/storage area.

**Figure K-1
 Shell Waste Management Plan Template**

D. TYPE OF WASTE GENERATED FROM RESPONSE OPERATIONS

Wastes generated during oil spill response operations may be categorized as indicated in Table K-1. Table K-1 should be used to categorize wastestreams to determine handling, storage and ultimately disposal methods and locations. Remember - never mix wastes!

WASTE STREAM	SOURCES
<u>Non-Hazardous</u>	
- Oily Liquid	Offshore and onshore recovery operations; vessels, vehicle, aircraft and equipment operations; personnel and equipment decontamination operations; waste storage and disposal area storm water runoff control operations; wildlife washing operations; equipment demobilization operations.
- Non-Oily Liquid	Sewage collection operations; gray water collection operations; laundry operations; oil/water separation operations; wildlife rehabilitation operations.
- Oil Solids	Offshore and onshore recovery operations; debris removal operations; <i>in situ</i> burning operations; site restoration operations; personnel and equipment decontamination operations; equipment demobilization operations; wildlife capture, cleaning and rehabilitation operations.
- Non-Oily Solids	Offshore and onshore recovery operations; debris removal operations; garbage collection operations; construction operations; site restoration operations; wildlife capture, cleaning and rehabilitation operations; equipment demobilization operations.
<u>Hazardous</u>	
Vessels, vehicle, aircraft and equipment operations; dispersant use operations; wildlife rehabilitation operations.	

**Figure K-1
 Shell Waste Management Plan Template**

E. CONTAINERIZED AND STORED WASTE

Waste accumulated at spill cleanup sites will have to be containerized and stored. Use **F through K** of possible waste streams to identify temporary storage techniques. Note that each waste stream will have to be classified as to its hazardous nature. Additionally, each container will have to be properly identified and marked for hazard communications as well as properly marked and labeled to meet DOT requirements before shipment. All hazardous waste must be transported immediately to the nearest shore base for continued storage.

F. TEMPORARY WASTE SITES will have to be identified and established. These sites will need to be in close proximity to the cleanup site. Security requirements must be considered along with the access to outside transportation. These storage areas should be established with the following considerations: distance to living/working areas (cleanup operations as well as the general public), tidal influx, local wildlife impact, security, cleanup of spilled product and rainwater runoff. The following section should be completed for each temporary storage site. To establish security, contact the Logistics Section Chief.

SITE LOCATION	SECURITY	ACCESS

G. COMPANY-APPROVED TREATMENT, RECYCLING AND DISPOSAL FACILITIES are listed below. Prior contact must be made with the facility as soon as the waste is identified and an estimated volume is established.

COMPANY NAME, ADDRESS, TELEPHONE NUMBER	CONTACT (COMPLETE WHEN CALLED)	TYPE WASTE APPROVED FOR

**Figure K-1
 Shell Waste Management Plan Template**

- K. EQUIPMENT, MANPOWER AND EXPENDITURES** must be controlled and documented. The following can be used for this purpose. If additional assistance is required for cost control, contact the Finance Section Chief. If additional assistance is required for purchasing or locating equipment or supplies, contact the Logistics Section Chief.

EQUIPMENT					
WASTE HANDLING EQUIPMENT	VENDOR	S.O. #	DAYS USED	COST PER DAY	TOTAL COST

MANPOWER					
WASTE HANDLING EQUIPMENT	VENDOR	S.O. #	DAYS USED	COST PER DAY	TOTAL COST

OTHER COSTS (Fuel, Tools, Repair, Container Rental/Purchase, Other Equipment)					
WASTE HANDLING EQUIPMENT	VENDOR	S.O. #	DAYS USED	COST PER DAY	TOTAL COST

TOTAL COST =

- L. WASTE MANAGEMENT SITES** are identified in this Section.
- M.** Report all **ACCIDENTS/INCIDENTS** immediately to your supervisor. Always work safely and in an environmentally sound manner.

**Table K-2
 Oil/ Water/ Debris Separation Strategies**

The different types of wastes generated during response operations require different disposal methods. Waste shall be separated by material type for temporary storage prior to transport. The following table lists some of the options available for separating oily wastes into liquid and solid components. The table also depicts methods that may be employed to separate free and/or emulsified water from the oily liquid waste.

TYPE OF MATERIAL	SEPARATION METHODS
(1) LIQUIDS	
Non-emulsified oils	Gravity separation of free water
Emulsified oils	Emulsion broken to release water by: <ul style="list-style-type: none"> • Heat treatment • Emulsion breaking chemicals • Centrifuge • Filter/belt press
(2) SOLIDS	
Oil mixed with sand	<ul style="list-style-type: none"> • Collection of liquid oil leaching from sand during temporary storage • Extraction of oil from sand by washing with water or solvent • Mechanical sand cleaner • Removal of solid oils by sieving
Oil mixed with cobbles, pebbles or shingle	<ul style="list-style-type: none"> • Screening • Collection of liquid oil leaching from beach material during temporary storage • Mechanical sand/gravel cleaner • Extraction of oil from beach material by washing with water or solvent
Oil mixed with wood, plastics, seaweed and sorbents	<ul style="list-style-type: none"> • Screening • Collection of liquid oil leaching from debris during temporary storage • Flushing of oil from debris with water
Tar balls	Separation from sand by sieving

Table K-3 Temporary Storage Methods					
CONTAINER	ONSHORE	OFFSHORE	SOLIDS	LIQUIDS	NOTES
Barrels	✓	✓	✓	✓	May require handling devices.
Barges		✓	✓	✓	Liquids only in tanks. Consider venting of tanks.
Oil Storage Tanks	✓	✓		✓	Consider problems of large volumes of water in oil.
Bladders	✓	✓		✓	May require special hoses or pumps for oil transfer.
Pits	✓		✓	✓	Liner(s) required.
Roll-off Bins	✓		✓		Require impermeable liner and cover.
Mud Tanks	✓	✓	✓	✓	500 – 21,000 gal
Frac Tanks	✓	✓	✓	✓	Portable, can be deployed anywhere.

APPENDIX L BIBLIOGRAPHY

- Alaska Clean Seas. 1983. *Oil Spill Response Considerations Manual*.
- Alaska Clean Seas. 2010. *ACS Technical Manual, Volume 1, Tactics Descriptions; and Volume 2, Map Atlas*
- Alaska Department of Environmental Conservation. 2006. *North Slope Nearshore and Offshore Breakup Study Literature Search and Analysis of Conditions and Dates*.
- Alaska Department of Environmental Conservation, U.S. Environmental Protection Agency, and United States Coast Guard. 2008. *In situ Burning Guidelines for Alaska, Revision 1*, Anchorage, AK. [http://dec.alaska.gov/spar/perp/docs/ISB-Rev1\(Final-August%202008\).pdf](http://dec.alaska.gov/spar/perp/docs/ISB-Rev1(Final-August%202008).pdf). August.
- Alaska Regional Response Team. 1999. *The Alaska Federal / State Preparedness Plan for Response to Oil and Hazardous Substance Discharges/Releases - Unified Plan, Change 3*, <http://alaskarrt.org/>
- Allen, A.A. 1990. *Contained Controlled Burning of Spilled Oil During the Exxon Valdez Oil Spill*. Proceedings 13th Annual AMOP Technical Seminar, June 6-8, Edmonton, AB, Canada.
- Allen, A.A. 1991. *Oil Spill Response to Blowouts at Sea*. Proceedings First Offshore Australia Conference, November 25-27, Melbourne, Australia.
- Allen, A.A. and R.J. Ferek. 1993. *Advantages and Disadvantages of Burning Spilled Oil*. Proceedings 1993 International Oil Spill Conference, March 29-April 1, Tampa, FL.
- Atwater, S.G. 1991. *1990 Endicott Environmental Monitoring Program Final Report: Ice Break-up and Freeze-up*. Prepared by SAIC for the U.S. Army Corps of Engineers, Anchorage AK.
- Bech, C., P. Sveum, and I. Buist. 1993. *The Effect of Wind, Ice and Waves on the In Situ Burning of Emulsions and Aged Oils*. Proceedings of the Sixteenth Arctic and Marine Oilspill Program Technical Seminar, Calgary, AB. pp 735-748.
- Belchansky, G.I., D.C. Douglas, and N.G. Platonov. 2004. *Duration of the Arctic Sea Ice Melt Season: Regional and Interannual Variability, 1979-2001*. Journal of Climate 17:67-80.
- Bronson, M. 1998. *In Situ Burning Safe Distance Predictions with ALOFT-FT Model*. Prepared by EMCON Alaska, Inc., for Alaska Department of Environmental Conservation.
- Bronson, M., E. Thompson, F. McAdams, and J. McHale. 2002. *Ice Effects on Barge based Oil Spill Response Systems in the Alaskan Beaufort Sea*. Proceedings 25th Arctic and Marine Oilspill Program Technical Seminar (AMOP), Calgary, pp 1253-1268.
- Brown, H.M. and R.H. Goodman. 1986. *In Situ Burning of Oil in Experimental Ice Leads*. Environmental Studies Revolving Funds Report 064. National Energy Board, Calgary.

- Brower, W.A., R.G. Baldwin, C.N. Williams, Jr. 1988. *Climatic Atlas of the Outer Continental Shelf Waters and Coastal Regions of Alaska, Volume III Chukchi Beaufort Seas*. National Climatic Data Center, National Environmental Satellite, Data and Information Service, National Oceanic and Atmospheric Administration, Arctic Environmental Information and Data Center, University of Alaska, Anchorage, Alaska.
- Brunner, R.D., A.H. Lynch, J. Pardikes, E.N. Cassano, L.R. Lestak, J. Vogel. In Press. *An Arctic Disaster and Its Policy Implications*, Accepted and in press for a special issue of Arctic on the Human Dimensions of the Arctic System.
- Buist, I.A. and D.F. Dickins. 1987. *Experimental Spills of Crude Oil in Pack Ice*. Proceedings of the 1987 Oil Spill Conference, April 6-9, Baltimore, Maryland. American Petroleum Institute, Washington, D.C. pp 373-382.
- Cambell, T.E., E. Taylor, and D. Aurand. 1994. *Ecological Risks Associated with Burning as a Spill Countermeasure in a Marine Environment*. Proceedings of the 17th AMOP Technical Seminar, Jun 8-10, Vancouver, British Columbia, pp. 707-716.
- Canadian Ice Service. Archived Regional Ice Analysis Charts for the Western Arctic – <http://ice-glaces.ec.gc.ca>. Ottawa, Canada.
- Chandrasekar, S., G.A. Sorial, J.W. Weaver. 2006. *Dispersant Effectiveness on Oil Spills – Impact of Salinity*. ICES Journal of Marine Science, 64: 1418 -1430.
- Coastal Frontiers. 2001. *Spring Breakup Equipment Access Test Program (Draft and Final)*, prepared for BP Exploration (Alaska), Anchorage. August.
- Craig, P.C. 1984. *Fish Use of Coastal Waters of the Alaskan Beaufort Sea: A Review*. Transactions of the American Fisheries Society 113: 265-282.
- Dickins, D.F. 1984. *Alaskan Beaufort Sea Ice Atlas*. Prepared for SOHIO Petroleum Company, Dallas.
- Dickins, D.F., P.J. Brandvik, L.G. Faksness, J. Bradford, and L. Liberty. 2006. *Svalbard Experimental Spill to Study Spill Detection and Oil Behavior in Ice*. Report prepared for MMS and sponsors by DF Dickins Associates Ltd., SINTEF, The University Centre in Svalbard, and Boise State University, Washington, D.C., and Trondheim, Norway.
- Dickins, D.F., and I.A. Buist. 1981. *Oil and Gas Under Sea Ice Study: Vols. 1 & 2*. Prepared by Dome Petroleum Ltd. for COOSRA, Report CV-1, Calgary, AB, Canada.
- Dickins (D.F. Dickins Associates Ltd.) and OASIS Environmental. 2006. *North Slope Nearshore and Offshore Breakup Study Literature Search and Analysis of Conditions and Dates*. Report prepared for the Alaska Department of Environmental Conservation, Anchorage AK.
- Dickins, Vaudrey & Associates Inc., and S.L. Ross Environmental Research Limited. Sept. 2000. *Oil Spills in Ice Discussion Paper*. Prepared for Alaska Clean Seas, Prudhoe Bay, AK.

- Eicken, H., L. Shapiro, A. Gaylord A. Mahoney, and P. Cotter. 2006. *Mapping and Characterization of Recurring Spring Leads and Landfast Ice in the Beaufort and Chukchi Seas*. Prepared for Minerals Management Service, Anchorage, AK.
- Gardner, N.W., J.D. Ward, and J.Q. Word. 2011. *Toxicity of Physically and Chemically Dispersed Oil to Selected Arctic Species*, Proceedings of the International Oil Spill Conference, Portland, OR.
- Guénette, C.C. and R. Wighus. 1996. *In Situ Burning of Crude Oil and Emulsions in Broken Ice*. Proceedings of the 19th AMOP Technical Seminar. Calgary, AB. pp 895 - 906.
- Haidvogel, D.B., K.S. Hedstrom, and J. Francis. 2001. *Numerical Simulations of Atmosphere/Ocean/Sea Ice Interaction in the Arctic Ocean 1982-1996*. OCS Study MMS 2001-069. Anchorage, AK.
- Industry Task Group representing AMOCO Production Company, Exxon Company USA, Shell Oil Company, SOHIO Alaska Petroleum Company. 1983. *Oil Spill Response in the Arctic: An Assessment of Containment, Recovery, and Disposal Techniques*.
- Keinonen, A.J., K. Shirley, G. Liljeström, and R. Pilkington. 2006. *Transit and Stationary Coring Operations in the Central Polar Pack*. Proceedings ICETECH06 International Conference on Performance of Ships and Structures in Ice, July 16-19, Banff, AB, Canada.
- Kovacs, A. 1976. *Grounded Ice in the Fast Ice Zone along the Beaufort Coast of Alaska*. U.S. Army Corps of Engineers CRREL Report 76-32, Hanover, NH.
- Minerals Management Service. 1996. *Beaufort Sea Planning Area Oil and Gas Lease Sale 144, Final Environmental Impact Statement. Alaska Outer Continental Shelf Region*. OCS EIS/EA MMS 2007-026. Anchorage, AK.
- Minerals Management Service. 2007. *Chukchi Sea Planning Area Oil and Gas Lease Sale 193 and Seismic Surveying Activities in the Chukchi Sea, Final Environmental Impact Statement. Alaska Outer Continental Shelf Region*.
- National Oceanic and Atmospheric Administration. 2005. *Sensitivity of Coastal Environments and Wildlife to Spilled Oil, North Slope, Alaska Map Atlas*.
- National Oceanographic and Atmospheric Administration. *Beaufort Wind Scale and Sea Height Relationships*. <http://www.spc.noaa.gov/faq/tornado/beaufort.html>.
- National Oceanographic and Atmospheric Administration. *Office of Response and Restoration Dispersant Application Observer Job Aid*. <http://response.restoration.noaa.gov/oil-and-chemical-spills/oil-spills/resources/dispersant-application-observer-job-aid.html> .
- National Oceanographic and Atmospheric Administration. *Office of Response and Restoration Special Monitoring of Applied Response Technologies (SMART) Program*. http://response.restoration.noaa.gov/sites/default/files/SMART_protocol.pdf

- National Response Team Science & Technology Committee. 1997. *Fact sheet: Site Safety Plans for Marine In Situ Burning Operations.*
- Perkins, R.A. and K.M. McFarlin. 2011. *Evaluating the Biological Adaptability and Effects of Dispersed Oil using Arctic Test Species and Conditions: Part 2*, Proceedings, 34th AMOP Technical Seminar on Environmental Contamination and Response, Banff, AB.
- Reimnitz, E. and E. Kempema. 1984. *Pack Ice Interaction with Stamukhi Shoal Beaufort Sea, Alaska. In: The Alaskan Beaufort Sea Ecosystems and Environments* (Eds. Barnes, P., D. Schell, and E. Reimnitz), Academic Press, pp. 159-183.
- Robilliard, G.A., J.R. Harper, J. Isaacs, and C. Foget. 1985. *Chukchi Sea Coastal Studies: Coastal Geomorphology, Environmental Sensitivity, and Persistence of Spilled Oil. Volume 1: Final Report and Volume 2: Coastal Resource Inventory and Spill Sensitivity Index Maps.* Prepared by Woodward-Clyde Consultants for NOAA, Alaska Office, Oceans Assessment Division, Anchorage, AK.
- Shell Gulf of Mexico Inc. and Shell Offshore Inc. 2009. *Beaufort and Chukchi Seas Regional Tactics Manual.*
- Shell Oil Company, Sohio Alaska Petroleum Company, Exxon Company, U.S.A., and Amoco Production Company. 1983. *Oil Spill Response in the Arctic - Part 2: Field Demonstrations in Broken Ice.* Shell Oil Company, Sohio Alaska Petroleum Company, Exxon Company, U.S.A., Amoco Production Company. Anchorage, AK.
- Singaas, I., P. Brandvik, P. Daling, M. Reed, and A. Lewis. 1994. *Fate and Behaviour of Oils Spilled in the Presence of Ice – a Comparison of the Results from Recent Laboratory, Meso-scale Flume and Field Tests.* Proceedings of the 17th AMOP Technical Seminar, June 8-10, Vancouver, British Columbia, pp 355-370.
- S.L. Ross Environmental Research Ltd. 1983. *Evaluation of Industry's Oil Spill Countermeasures Capability in Broken Ice Conditions in the Alaskan Beaufort Sea.* Prepared for Alaska Department of Environmental Conservation, Anchorage, Alaska.
- S.L. Ross Environmental Research Ltd. 2002. *Dispersant Effectiveness Testing in Cold Water.* Final Report for U.S. Department of the Interior, Minerals Management Service., Herndon, VA and ExxonMobil Research and Engineering Co., Fairfax, VA.
- S.L. Ross Environmental Research Ltd. and D.F. Dickins Associates Ltd. 1987. *Field Research Spills to Investigate the Physical and Chemical Fate of Oil in Pack Ice.* Environmental Studies Revolving Funds Report No. 062. 95 p.
- S.L. Ross Environmental Research Ltd., D.F. Dickins Associates Ltd. and Alaska Clean Seas. 2003. *Tests to Determine the Limits of In Situ Burning of Thin Oil Slicks in Broken Ice.* Report prepared for the US Minerals Management Service and ExxonMobil Upstream Research.
- S.L. Ross Environmental Research Ltd. and MAR Incorporated. 2003. *Dispersant Effectiveness Testing on Alaskan Oils in Cold Water.* Report for U.S. Department of the Interior, Minerals Management Service, Herndon, VA.

Smith, N.K. and A. Diaz. 1987. *In-place Burning of Crude Oils in Broken Ice*. Proceedings of the 1987 Oil Spill Conference, April 6-9, Baltimore, Maryland. American Petroleum Institute, Washington, D.C. pp 383-387.

Vaudrey, K. 2000. *Part II: A Review of Ice Conditions, Oil Behavior, and Monitoring and Appendix B: Weather and Ice Statistics; In: Oil Spills in Ice Discussion Paper*. Prepared for Alaska Clean Seas, Prudhoe Bay, AK by D.F. Dickins Associates Ltd., Vaudrey & Associates Inc., and S.L. Ross Environmental Research Limited.

Vaudrey, K. 1996. *Design Basis Ice Criteria for the Northstar Development*, Prepared for BP Exploration (Alaska) Inc. by Vaudrey & Associates, San Luis Obispo, CA.

THIS PAGE
INTENTIONALLY
LEFT BLANK

TABLE OF CONTENTS

APPENDIX M USCG SUPPLEMENT M-1

M.1 CROSS REFERENCE TO USCG AND DEPARTMENT OF HOMELAND SECURITY [33 CFR 154] M-1

M.2 POTENTIAL DISCHARGES M-3

 M.2.1 Average Most Probable Discharge M-3

 M.2.2 Maximum Most Probable Discharge M-3

 M.2.3 Worst Case Discharge M-4

M.3 RESPONSE STRATEGY – FUEL TRANSFER RELEASE DURING SUMMER MONTHS M-4

 M.3.1 Response Strategy Parameters M-4

M.4 FUEL TRANSFER PROCEDURES M-7

 M.4.1 Introduction M-7

 M.4.2 Drillship Internal Fuel Transfers M-7

 M.4.3 Helicopter Fuel Transfer M-8

 M.4.4 Drillship Fuel Transfers M-8

 M.4.5 Fuel Transfer Vessel M-8

 M.4.6 *Discoverer* Fuel Transfer Procedures M-9

 M.4.7 Oil Spill Response Vessel and Barge Fuel Transfer Procedures M-11

M.5 PRODUCT SPECIFICATION FOR LOW SULFUR DIESEL FUEL OIL M-23

TABLES

Table M.1-1 Cross Reference to USCG and Department of Homeland Security Response Plans for Oil Facilities Transferring Oil or Hazardous Material in Bulk M-1

Table M.3-1 Fuel Transfer Release During Summer Response Strategy M-5

**THIS PAGE
INTENTIONALLY
LEFT BLANK**

APPENDIX M USCG SUPPLEMENT

M.1 CROSS REFERENCE TO USCG AND DEPARTMENT OF HOMELAND SECURITY [33 CFR 154]

**Table M.1-1
Cross Reference to USCG and Department of Homeland Security
Response Plans for Oil Facilities Transferring Oil or Hazardous Material in Bulk**

REGULATION SECTION (33 CFR 154)	SECTION TITLE	OSRP SECTION
1035(a)	Introduction, Plan Contents, and Cross Index	This document
(a)(1)	Facility name, address, telephone and fax numbers, mailing address	Section 1.1
(a)(2)	Facility's geographic location	Section 1.1
(a)(3)	24-hr procedure for contacting facility owner	Section 2.1 and 2.2
(a)(4)	Table of Contents	Table of Contents of the OSRP
(a)(5)	Cross index	This document
(a)(6)	Record of Changes	Section 1.3
(b)	Emergency Response Action Plan	Part 2
(b)(1)	Notification procedures	Sections 2.1, 2.2 and 2.7.1
(b)(1)(i)(A)	List of response personnel (include QI)	Section 2.1 and Section 2.2
(b)(1)(i)(B)	Government agencies	Section 2.7.1
(b)(1)(ii)	Notification form	Section 2.7.1
(b)(2)(i)(A)	Average most probable discharge	The document, Section M.2
(b)(2)(i)(B)	Maximum most probable discharge	This document, Section M.2
(b)(2)(i)(C)	Worst case discharge	This document, Section M.2
(b)(2)(i)(D)	Worst case discharge from non-MTR portion	Not applicable
(b)(2)(ii)(A)	Failure of manifold, loading arm, hoses, other	This document , Section M.3
(b)(2)(ii)(B)	Tank overfill	This document, Section M.4
(b)(2)(ii)(C)	Tank failure	Not applicable
(b)(2)(ii)(D)	Piping rupture	Not applicable
(b)(2)(ii)(E)	Piping leak	Not applicable
(b)(2)(ii)(F)	Explosion or fire	This document, Section M.3
(b)(2)(ii)(G)	Equipment failure (e.g. pumping system failure, relief valve failure, or other general equipment relevant to operational activities associated with internal or external facility transfers.)	Shell Tactic LE-1 and ACS Tactic L-6 ; specific to <i>Discoverer</i> refer to Appendix N (N.4, Prevention Plan)
(b)(2)(iii)	List of equipment and responsibilities for mitigation of average most probable discharge	This document, Section M.3

Table M.1-1 (Continued)
Cross Reference to USCG and Department of Homeland Security
Response Plans for Oil Facilities Transferring Oil or Hazardous Material in Bulk

REGULATION SECTION (33 CFR 154)	SECTION TITLE	OSRP SECTION
(b)(3)(i)	Facility's personnel responsibilities This subsection must contain a description of the facility personnel's responsibilities to initiate a response and supervise response resources pending the arrival of the QI	Section 2.2
(b)(3)(ii)	QI's responsibility and authorities	Section 2.2
(b)(3)(iii)	Personnel to manage response actions	Section 2.2
(b)(3)(iv)(A)	OSRO and spill management team capabilities	Section 2
(b)(3)(iv)(A)(1)	Provide equipment and supplies for the average most probable discharge	This document, Section M.3
(b)(3)(iv)(A)(2)	Trained personnel for 7 days per week	Section 2.4
(b)(4)(i)	Sensitive areas	This document, Section M.3 NOAA ESI Index Maps ESI 14-16 ACS Map Atlas Sheets 223 -256 http://www.asgdc.state.ak.us/maps/cplans/subareas.html#northslope
(b)(4)(ii)	Worst case discharge	This document, Section M.3 NOAA ESI Index Maps ESI 14-16 ACS Map Atlas Sheets 223 -256 http://www.asgdc.state.ak.us/maps/cplans/subareas.html#northslope
(b)(4)(ii)(A)	List of sensitive areas	This document, Section M.3 NOAA ESI Index Maps ESI 14-16 ACS Map Atlas Sheets 223 -256 http://www.asgdc.state.ak.us/maps/cplans/subareas.html#northslope
(b)(4)(ii)(B)	Procedures to protect sensitive areas	This document, Section M.3 NOAA ESI Index Maps ESI 14-16 ACS Map Atlas Sheets 223 -256 http://www.asgdc.state.ak.us/maps/cplans/subareas.html#northslope
(b)(4)(ii)(C)	Depict response actions on map	ACS Map Atlas and Part 2 of OSRP
(b)(4)(iii)(A)	Personnel and equipment to protect sensitive areas	Section 2.7
(b)(4)(iii)(B)(1), (2)	Persistent oils: distance traveled	Section 2.7
(b)(4)(iii)(B)(3)	Distance spill reaches in 24 hr at maximum current for discharge to non-tidal waters	Not applicable; no discharge possible to streams
(b)(4)(iii)(B)(4)	Distance spill reaches in tidal waters	Section 2.7.2
(b)(4)(iii)(B)(5)	Trajectory model	Section 2.7.2
(b)(4)(iii)(B)(6)	Additional areas	Sections 2.7.2 and 2.7.3
(c)(1)	Training procedures	Appendix F
(c)(2)	Drill procedures	Appendix F

Table M.1-1 (Continued)
Cross Reference to USCG and Department of Homeland Security
Response Plans for Oil Facilities Transferring Oil or Hazardous Material in Bulk

REGULATION SECTION (33 CFR 154)	SECTION TITLE	OSRP SECTION
(d)	Plan review and update procedures	Section 1.3
(e)(1)(i)	Physical description of facility	Section 1.1
(e)(1)(ii)	Vessels transferring at facility to identify the sizes, types, and number of vessels that the facility can transfer oil to or from simultaneously.	This document, Section M.4
(e)(1)(iii)	Location of first valve in secondary containment	Not applicable
(e)(1)(iv)	Information on oil	This document , Section M.5
(e)(2)(i)	24-hr contact for QI and alternate	Section 2.1
(e)(2)(ii)	24-hr contact for OSRO	Section 2.7.1
(e)(2)(iii)	24-hr contact for agencies	Section 2.7.1
(e)(3)(i)	Equipment and personnel for average most probable discharge a list of equipment and facility personnel required to respond to an average most probable discharge, as defined in §154.1020. The appendix must also list the location of the equipment	This document, Section M.3
(e)(3)(ii) & (iii)	Other equipment information	Appendix A
(e)(4)	Communications Plan	Section 2.5.2
(e)(5)	Site-specific Health and Safety Plan	Appendix F
(e)(6)	List of acronyms and definitions	Section 1.5

M.2 POTENTIAL DISCHARGES

M.2.1 Average Most Probable Discharge

The average most probable discharge is calculated as approximately 0.5 bbl of diesel fuel, based on the definition contained in 33 CFR 154.1020 (the lesser of 50 bbl or 1 percent of the volume of the WCD).

M.2.2 Maximum Most Probable Discharge

The maximum most probable discharge is 5.0 bbl of diesel fuel, calculated from the definition contained in 33 CFR 154.1020 (the lesser of 1,200 bbl or 10 percent of the volume of the WCD).

M.2.3 Worst Case Discharge

The WCD (for the purposes of the USCG) is 2,000 gal (48 bbl), as calculated based on the definition contained in 33 CFR 154.1029(b)(2), using the following values:

- *Maximum Time to Discover Release:* 5 minutes
- *Maximum Time to Shutdown Pumping:* 0.5 minutes (30 seconds)
- *Maximum Transfer Rate:* 320 gpm (based on representative fuel transfer pumps on the oil spill response vessel = 7.6 bbl/min)
- *Total Line Drainage Volume:* 163 gal [assuming a 4-inch by 820-ft marine hose between the pump manifold on the fuel barge and the delivery flange on the inlet piping at the drillship] or 3.9 bbl.

Type of product spilled: Low-sulfur Arctic diesel (refer to characteristics described in this Appendix, Section M.5)

Cause: Hose flange cracks and/or hose ruptures during diesel fuel transfer operations to the *Discoverer*

Environmental conditions: Winds 10 knots NE (prevailing wind direction), clear skies, average temperature 44 °F (average for August)

Spill trajectory: Approximately 10 percent of the spill is contained on the deck of the fueling barge, and 90 percent of the spilled diesel enters the water. Current is assumed to be 0.75 knots to the WNW.

M.3 RESPONSE STRATEGY – FUEL TRANSFER RELEASE DURING SUMMER MONTHS

M.3.1 Response Strategy Parameters

The following response strategy describes methods and equipment that could be used in response to a hypothetical diesel spill during a fuel transfer from a fuel barge to one of Shell's exploration drilling locations during summer months.

For the purposes of the strategy, the release occurs during a fuel transfer from a barge or supply boat to the drillship. Assumptions for the discharge are based on 33 CFR 154.1029(b). The diesel release is assumed to occur because of transfer hose failure. The spill duration is assumed to be 5.5 minutes, resulting in the release of 2,000 gal (48 bbl) of diesel. Approximately 10 percent of the spill is contained on the deck of the drillship, and 90 percent of the spilled diesel enters the water. The maximum targeted recovery volume is 3,132 gal (75 bbl).

The direction of the wind and ocean current will have limited effect on the recovery of diesel because containment boom will be pre-deployed prior to the fuel transfer. The current is assumed to be 0.75 knots to the NE. The sea conditions are assumed to be typical 1.5 to 2.0 ft wave height.

**Table M.3-1
Fuel Transfer Release During Summer Response Strategy**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
(i) Stopping Discharge at Source	<p>The fuel barge is positioned adjacent to the drillship to conduct a fuel transfer. The fuel transfer is monitored by a dedicated response team equipped with an OSR vessel and three (3) 34-ft work boats.</p> <p>A pre-transfer conference is conducted between the fuel vessel, the drillship, and response team personnel. During the transfer, the fuel vessel operator, an officer in the wheelhouse of the fuel barge tug, and the hosewatch from the drillship remain in both visual and radio contact. Additionally, the response team pre-deploys containment boom down-current of the fueling operation.</p> <p>During the fuel transfer, the fuel hose close to the deck rail of the drillship fails. The failure is assumed to be a complete rupture of the hose.</p> <p>For the purposes of the strategy, the hosewatch discovers the hose failure after 5 minutes. The hosewatch activates the emergency shutdown, stopping the pump on the fuel barge. At T + 5.5 minutes, fuel transfer has stopped.</p> <p>The On-Site Shell Drill Foreman assumes role of IC. He activates the drillship response team. The response team from the drillship lifts a section of hose onto the deck, attempting to prevent any further draining of fuel. The end of the hose is sealed.</p> <p>The On-Site IC ensures notifications to appropriate state and federal agencies are performed. Shell's OSRO (ACS) and response contractors (ARS and AES-RO) are put on standby.</p>	<p>This document: Fuel Transfer Procedures (M.4)</p> <p>Section 2.7.1</p>
(ii) Preventing or Controlling Fire Hazards	<p>Throughout the first few minutes of the spill, the Site Safety Officer verifies that all sources of ignition are shut down or removed from the area. The Site Safety Officer also reminds personnel that the vessel diagram has the location of all fire suppression equipment.</p> <p>The Site Safety Officer then provides access zone information and determines PPE requirements. Monitoring protocol is established for all work areas to ensure personnel protection. The monitoring protocol establishes safety zones according to applicable OSHA and fire hazard standards.</p>	<p>Shell S-1 through S-4</p>
Well Control Plan	<p>Not applicable.</p>	
(iv) Surveillance and Tracking of Oil	<p>To ensure that the entire spill is recovered, diesel movement is tracked using visual observations from the drillship, fuel barge, and support vessels.</p> <p>After recovery operations, one of the three 34-ft work boats performs reconnaissance of the area down-current of the release using visual methods and a handheld FLIR unit to monitor the spill's movement.</p>	<p>Shell TS-1, TS-2</p>
(v) Protection of Environmentally Sensitive Areas and Areas of Public Concern	<p>Diesel is recovered in open water in compliance with the Site Safety Plan, and a shoreline assessment/recovery plan is not activated. This is validated through overflights and surveillance.</p> <p>If necessary, NOAA ESI Maps, ACS Atlas Maps, and the North Slope Subarea Contingency Plan are used to identify areas of major concern. Nearby priority protection sites are identified. ARS is put on standby to deploy exclusion booms if necessary at the nearest shoreline.</p>	<p>NOAA ESI Index Maps ESI 14-16</p> <p>ACS Map Atlas Sheets 223 -256</p> <p>http://www.asgdc.state.ak.us/maps/cplans/subareas.html#northslope</p>

**Table M.3-1
Fuel Transfer Release During Summer Response Strategy (Continued)**

ADEC REQUIREMENT	RESPONSE STRATEGY	Cross Reference
<p>(vi and vii) Spill Containment, Control, and Recovery Procedures</p>	<p><u>TF Descriptions:</u> TF-1: Primary response is provided by personnel and equipment stationed with the drillship. This equipment includes an OSR vessel; personnel and equipment stationed with the drillship; 11,400 bbl capacity; two (2) Lamor LSC-5 skimmers; one (1) duplex mini-brush/disc skimmer; one (1) vertical rope mop skimmer; three (3) 34-ft work boats; and containment and fire boom. The OST is not mobilized because there is sufficient storage capacity for the recovered fluids on the OSR vessel. TF-2: Shell's Shoreline Protection Task Forces are put on standby to deploy exclusion booms at priority sites. The IC, OSR vessel Captain, and Site Safety Officer communicate throughout the recovery operations. <u>Recovery Timeline:</u> T = 0 Minutes. Transfer hose ruptures. TF-1 has previously deployed two (2) work boats towing boom in a U-shape formation down-current of the fuel transfer operations. T + 5.5 Minutes. Fuel transfer operations have stopped. Site Safety Officer assesses access and PPE requirements. The drillship and fuel barge detach and separate. Recovery operations begin. Sorbents are used to clean the deck of the drillship. T + 20 Minutes. The work boats position the U-boom to contain the spilled fuel, and then proceed to the OSR vessel for recovery. The OSR vessel utilizes either a mini-brush skimmer or rope mop to collect the contained diesel. Recovered fuel/water mixture is stored in the OSR vessel. End of Day 1. Recovery operations have stopped. Approximately 75 bbl of liquid (fuel/water) is collected and stored in the OSR vessel.</p>	<p>Shell OR-2A, OR-2B OR-5A, OR 5B</p> <p>ACS C-13, C-14, C-15</p> <p>Shell OR-5A (modified for OSR vessel)</p> <p>Shell S-2, S-3</p> <p>Shell OR-5A (modified for OSR vessel)</p>
<p>(viii) Lightering Procedures</p>	<p>On a non-emergency basis the recovered diesel is lightered from the OSR vessel to the OST tanker located within 240 n mi.</p>	<p>Shell OR-3A</p>
<p>(ix) Transfer and Storage of Recovered Oil/Water; Volume Estimating Procedure</p>	<p>The volumes of stored oil are gauged with ullage tape and recorded on waste manifests</p>	<p>Shell TS-2</p>
<p>(x) Plans, Procedures, and Locations for Temporary Storage and Disposal</p>	<p>A Waste Management Plan is developed in order to: (1) fill out and sign manifests; (2) measure liquid and other waste; and (3) submit a plan to the UC for waste management. Non-liquid oily wastes are classified and disposed of according to classification. Non-oily wastes are classified and disposed of accordingly. Recovered fluids potentially transferred to West Dock would be disposed of either using available injection wells or by reprocessing in available production facilities. Recovered fluids stored on board the OST would be disposed of outside the U.S., either at Shell Group refineries or other third-party processors, in accordance with Shell environmental policy, and relevant local laws and regulations.</p>	<p>Shell DP-1</p> <p>ACS D-1</p> <p>ACS D-2,</p> <p>ACS D-3</p> <p>Appendix K</p>
<p>(xi) Wildlife Protection Plan</p>	<p>ACS is mobilized, if necessary, to conduct wildlife monitoring immediately. If necessary, deterrents to protect animals are put in place at the spill scene during recovery operations. The IBRRC is put on standby in the event the wildlife treatment facility is required.</p>	<p>ACS W-1 ACS W-2, W-2B, ACS L-6</p>
<p>(xii) Shoreline Cleanup Plan</p>	<p>Fuel is recovered or dissipates prior to encountering any shoreline.</p>	

M.4 FUEL TRANSFER PROCEDURES

M.4.1 Introduction

At exploration sites, the following types of fuel transfers will be conducted:

- Fuel transfers to or from the drillship, including transfers from the drillship to other supporting vessels (e.g., anchor handler) or helicopters.
- Fuel transfers to or from the OSR vessel, including transfers from these vessels to other supporting vessels such as work boats.

Fuel Transfer Procedures for the OSR vessels and for the *Discoverer* are described in this document.

The drillship *Discoverer* incorporates fuel transfer facilities for helicopter support, fuel barge, and other support vessels.

Fuel transfers will be performed in accordance with:

- Lease-specific requirements including the pre-deployment of booming;
- USCG regulations [33 CFR 154.1035(b)(2)(i)] and vessel response plans; and
- ADEC regulations 18 AAC 75.025.

Drillship-specific procedures governing fuel transfers, including emergency shutdown, will be strictly followed by marine personnel. The procedure manuals will be on board the drillship. If a spill of any size is detected, immediate action will be taken to stop the source, prevent any spill going overboard, and initiate containment and recovery actions. The drillship has shipboard oil pollution emergency plans that personnel adhere to, including immediate contact of the supervisor and reporting to the appropriate authorities.

M.4.2 Drillship Internal Fuel Transfers

Internal fuel transfers include flow of fuel from the on-board storage tanks to settling tanks, or to loading stations on deck. On-board storage tanks will include:

- cold-start compressor,
- emergency generator day tank,
- incinerator day tank,
- deck cranes,
- crude oil tank, and
- mud pits.

The emergency generator day tank and the incinerator day tank are fitted with overflow pipes that return excess fuel back to the inner hull storage tanks. These transfers generally will occur twice daily, once per shift, and are performed by marine personnel. Safety procedures include adherence to an internal fuel transfer checklist, direct communication among personnel, and visual inspection of the transfers. No internal fuel transfers will be conducted during high-risk situations such as bad weather or alarm status.

If an alarm occurs, an emergency shutdown system at the pumps will close any valve in use and stop the transfer to avoid spill overflow.

M.4.3 Helicopter Fuel Transfer

Helicopter fuel transfers include storage, filtering, and transfer of fuel from the fuel pods located on the drillship deck through pumps and filters to the delivery skid on the heli-deck. Emergency shutdown controls are located at the heli-deck and the forward port exit ladder from the heli-deck. Preventive measures for fuel transfer to the helicopters include:

- Ensuring no helicopters are inbound/outbound;
- Discontinuing hot work on the heli-deck and starboard decks;
- Verifying operative firefighting system including extinguisher on the heli-pad;
- Proper alignment of fueling facilities (including valves, motor, pump, and coalescing filter); and
- Electrical bonding or grounding of the helicopter to the vessel.

Only authorized personnel (either the Helicopter Landing Officer or one of three heli-deck crew members) will activate this system.

M.4.4 Drillship Fuel Transfers

No fuel transfers will occur during emergency weather conditions or alarms without the direct approval of the OIM. Safety of diesel fuel transfer to the drillship will rely on direct communication between drillship and fuel supply vessel personnel responsible for the transfer procedures. Preventive measures for ensuring safe transfer will rely on pre-transfer procedures. Prior to transfer, the fuel-handling personnel will identify:

- Product, rate of transfer, and sequence of operations;
- Critical stages of the transfer operation;
- Applicable federal, state, and local regulations; and
- Emergency procedures including shutdown operations.

Fuel transfers will include the use of pre-deployed boom, visual inspection, and open communication between the personnel of the fueling facility and the drillship personnel. Continuous communication is the best preventive measure for avoiding an emergency situation. If radios are used for communication, they will be tested and ensured to be intrinsically safe as required by 46 CFR 110.15 through 46 CFR 110.100 and 46 CFR 11.80.

Once a fuel transfer is complete, fill valves will be closed and visual inspection of valves, flanges, pumps, and connection facilities will be conducted to ensure there is no discharge.

M.4.5 Fuel Transfer Vessel

In normal operation, the fuel transport vessel will receive diesel fuel delivered from a drilling support vessel or third-party fuel barge. The vessel may also serve as a fuel lightering vessel transporting fuel from a drilling support vessel or third-party barge to the drillship. In both cases, the fuel transfer procedures will be based on the more stringent of either the vessel's own procedures (as part of the USCG-approved Vessel Response Plan submitted by each vessel owner) or the similar procedures in place at the drillship.

The fuel transport vessel may also at times be used to provide diesel bunkering for OSR-related work boats (34-foot work boats), in which case the transfer would always be conducted under the fuel transfer procedures described in Section M.4.6 of this Appendix M (*Discoverer Fuel Transfer Procedures*).

In the event that any oil spill response-related work boats or support vessels have fuel delivered to them by a third-party fuel barge, the transfer would be conducted in accordance with the fueling procedure established by Shell.

Where required as part of an approved Vessel Response Plan, or as required under the lease stipulations, fuel transfers will include the use of pre-deployed boom, visual inspection, and communication among the vessel personnel as the best preventative measures.

M.4.6 *Discoverer* Fuel Transfer Procedures

Prior to taking part in any bunker transfer operations, the Chief Engineer shall ensure that any assistants are fully conversant with the system and understand the implications of the MARPOL regulations.

All persons involved in bunker fuel transfer shall read and understand the posted bunkering procedures.

Prior to working material fuels, crew members are advised to consult the relevant MSDS in order to familiarize themselves with the potential health risks caused by “inhalation,” “skin contact,” and “ingestion.”

A list of all persons involved in the bunker operation shall be posted in a prominent position.

The Chief Engineer will coordinate with the Chief Officer regarding the possible transfer of ballast to ensure the ship remains in a proper list and trim.

The Chief Engineer will conduct a pre-transfer conference with the bunker suppliers, or with the appropriate ship staff for an internal transfer. Ensure sequence of loading/transfer is verified.

The Chief Engineer will check the requirements are carried out, and sign the pre-transfer shore/ship, ship/ship, and bunker checklist forms as appropriate.

Bunker Fuel Transfer Procedure:

1. Suspend all hot work permits.
2. Terminate all internal transfers if in progress.
3. Ensure all fuel storage tank valves are closed.
4. Take a full set of soundings.
5. Clean the inlet strainer and zero the meter count.
6. Liaise with Bridge to confirm which tanks are being filled.
7. Confirm that the bunker connection save-all is drained.
8. Ensure deck scuppers are plugged.
9. Check spill kit is on location and complete.
10. Where appropriate, ensure red light and bunker flag are deployed.
11. Bunkering stations to be manned continually during the entire operation.
12. Check hose and bunker line is clear. Make the connection and secure the hose.
13. Establish communication between E.C.R. Bridge and bunker station and fueling vessel.
14. Confirm the pumping rate and quantity to be pumped with fueling vessel.
15. Bridge to make PA announcement regarding the start of fueling operations.
16. Ensure any heading or position changes are communicated to the fueling vessel.
17. Open the bunker station valves and tank valves.
18. Start the operation.

19. 10 minutes after starting, collect a sample. (Check the sample with the senior watchkeeper. If okay, continue bunkering operations)
20. Collect a sample in the middle of the operation. (Check sample with senior watchkeeper. If okay, continue bunkering operation)
21. Take manual soundings throughout the operation.
22. Always aim to finish on a non-full tank.
23. At completion close tank and bunker station valves.
24. Before disconnecting hose, confirm quantity received.
25. Secure bunker hose so that end is over save-all.
26. Inform Bridge of terminating operations. Hot work permits may be resumed.
27. Bridge to make P.A. announcement regarding termination of fueling operations.
28. Ensure oil record book is completed with correct information. Also make entries in engine room and deck logs.

M.4.7 Oil Spill Response Vessel and Barge Fuel Transfer Procedures

*Ship's Fuel Oil
Transfer Procedure*
Per
33 CFR 155.750

M/V _____

North American Hull Number **235**
Edison Chouest Offshore, LLC
August 17, 2005

Table of Contents

Introduction	2
(1) Fuel Oils Transferred	2
Description and Safety Precautions	2
(2) Fuel Oil Transfer System	2
Tanks and Pumps	3
Transferring	4
Loading	5
Off-Loading	6
(3) Personnel Requirement for Fuel Oil Transfer	7
(4) Duties of Required Personnel for Fuel Oil Transfer	7
Duties of Person in Charge	7
Duties of Transfer Personnel	8
(5) Mooring Duties for Oil Transfer	9
(6) Emergency Shut-Down	9
(7) Topping Off	10
(8) Transfer Completion	10
Emptying of the Discharge Containment Areas	10
(9) Accidental Oil Discharge	10
(10) Closing and Opening the Vessels Openings	11
(11) Transfer Hose Markings	11
Fuel Oil Transfer System Drawing	
Tank & Misc. Vent System	1

FUEL OIL TRANSFER PROCEDURES

Introduction

This fuel oil (F.O.) transfer procedure is prepared in accordance with 33 CFR 155.750. It is a requirement for the vessel personnel to use this transfer procedure for each transfer of F.O. to (Loading), from (Off-Loading), and within the vessel (transferring). This procedure is to be kept in a place where it can be easily seen and used by members of the crew when engaged in transfer operations. Any exemptions or alternatives granted must be placed in front of the transfer procedures.

(1) Fuel Oils Transferred - Description and Safety Precautions

Diesel Oil (D.O.) is a light brown, non-viscous liquid that has an odor similar to kerosene. It has a flash point between 110 and 190 deg F and an autoignition temperature of 494 deg F. D.O. is both a skin and eye irritant. Safety precautions should be taken when handling, such as wearing protective gloves and glasses. Keep sparks, flames and other sources of ignition away. In case of a leak or spill, notify personnel on notification list in part (9) of this procedure. When large spills occur evacuate area and remove all sources of ignition. In case of a fire (class B) isolate hazard area and begin extinguishing the fire with the use of carbon dioxide, dry chemical, foam, or water fog. Direct application of water or foam to a pool of D.O. can cause frothing and thereby increase the fire.

(2) Fuel Oil (F.O.) Transfer System

The fuel oil transfer system can be arranged to load from the on deck fuel oil fill/discharge connection, off-load fuel oil from the on deck fuel oil fill/discharge connection or from the rig fuel oil discharge connection or transfer fuel oil between the various tanks within the ship. Diagrams of the fuel oil transfer piping drawing and vents piping drawing are after this procedure.

FUEL OIL TRANSFER PROCEDURES

Tanks and Pumps:

<u>Tanks</u>	<u>Location</u>	<u>Capacity (Gal.)</u>
FO #2-P	21 - 41	22755
FO #2-S	21 - 41	21919
FO #3-C	41 - 57	19484
FO #4-C	57 - 73	22078
FO #5-C	73 - 92	23376
FO #5-P	73 - 92	25043
FO #5-S	73 - 92	25043
FO #6-C	92 - 112	26945
FO #6-P	92 - 112	21535
FO #6-S	92 - 112	21535
FO #7 P	107 - 116	12172
FO #7 S	107 - 112	12172
FO DAY TANK-P	29 - 34	13528
FO DAY TANK-S	27 - 34	18345
FO OVERFLOW-P	36 - 41	2516.2

Pumps

- 1) Fuel Oil Cargo Pump
 Located @ Frame 40
 Aurora 344A 4"x5"x 9a
 75 HP, 3600 RPM Motor
 760 GPM @ 290 TDH, 480V

- 2) Fuel Oil Transfer Pump
 Located @ Frame 36
 Barnes 25CCE 3"x3"
 15 HP, 3600 RPM Motor
 320 GPM @ 115 TDH, 480V

- 3) Maximum Transfer Rate For Cargo and
 Transfer Pumps Combined: 1080 GPM

Note: TDH indicates total head (in feet) developed across pump.

FUEL OIL TRANSFER PROCEDURES

Transferring

The fuel oil cargo pump is used primarily for transferring fuel from the vessel to offshore drilling rig installations. The fuel oil transfer pump is used primarily for transferring fuel oil between the various fuel oil tanks within the vessel. The procedure for transferring fuel oil to and from any combination of two (2) different tanks is as follows:

1. Ensure the F.O. pumps are off.
2. Ensure the following valve line-up is correct and performed in the order given before beginning any transfer (valves can be referenced on the system diagram after this procedure):
 - a) Close the following valves:
 - 1) All F.O. tank fill valves,
 - 2) All F.O. tank suction valves,
 - 3) F.O. transfer pump discharge valve(s) for deck connections
 - b) Open the following valves:
 - 1) Appropriate F.O. tank suction valve for tank being transferred from (including appropriate tank valve)
 - 2) F.O. transfer pump suction valve from suction header
 - 3) F.O. transfer pump discharge valve to fill header
 - 3) F.O. meter inlet and outlet valves (if required)
 - 4) Appropriate F.O. tank fill valve for tank being transferred to (including appropriate tank valve)
3. When communication is established (via sound powered phone, intrinsically safe VHF, or other acceptable means) and the personnel are in their proper positions in accordance with the rest of these procedures - transferring may begin at the order of the person in charge to begin pumping. Inspect entire line-up for leaks after pumping is started.
4. When transferring is complete the system should be secured in accordance with part (8).

FUEL OIL TRANSFER PROCEDURES

Loading

The fuel oil transfer piping system is designed to allow either simultaneous or individual loading (filling) of any combination of the various fuel oil tanks within the vessel from the main deck fuel oil fill/discharge connections. The procedure is as follows:

1. Ensure the F.O. pumps are off.
2. Ensure the following valve line-up is correct and performed in the order given before beginning any transfer (valves can be referenced on the system diagram after this procedure):
 - a) Close the following valves:
 - 1) All F.O. tank fill valves,
 - 2) All F.O. tank suction valves,
 - 3) F.O. meter inlet and outlet valves
 - 4) F.O. transfer pump discharge valve for deck connections
 - b) Open the following valves:
 - 1) Appropriate F.O. tank fill valve(s) for tank(s) being filled (including appropriate tank valves)
 - 2) F.O. fill valve from deck connection
 - 3) Main deck F.O. fill/discharge connection and flange - being ready to catch any fuel still in the pipe with a bucket and making immediate hose connection with gasket.
3. When communication is established (via sound powered phone, intrinsically safe VHF, or other acceptable means) and the personnel are in their proper positions in accordance with the rest of these procedures - transferring may begin at the order of the person in charge to begin pumping. Inspect entire line-up for leaks after pumping is started.
4. When loading is complete the system should be secured in accordance with **part (8)**.

FUEL OIL TRANSFER PROCEDURES

Off-Loading

The fuel oil transfer pumps are capable for simultaneous or individual off-loading to an offshore drilling rig installation of any combination of the various fuel oil tanks within the vessel or in the event of dry-docking of the vessel and it is needed. The procedure is as follows:

1. Ensure the F.O. pumps are off.
2. Ensure the following valve line-up is correct and performed in the order given before beginning any transfer (valves can be referenced on the system diagram after this procedure):
 - a) Close the following valves:
 - 1) All F.O. tank fill valves,
 - 2) All F.O. tank suction valves,
 - 3) F.O. meter inlet and outlet valves
 - b) Open the following valves:
 - 1) Appropriate F.O. tank suction valve(s) for tank(s) being transferred (including appropriate tank valve)
 - 2) F.O. transfer pump suction valve from suction header
 - 3) F.O. transfer pump discharge valve to appropriate deck discharge connection
 - 4) Main deck F.O. discharge connection - being ready to catch any fuel still in the pipe with a bucket and making immediate hose connection with gasket.
3. When communication is established (via sound powered phone, intrinsically safe VHF, or other acceptable means) and the personnel are in their proper positions in accordance with the rest of these procedures - transferring may begin at the order of the person in charge to begin pumping. Inspect entire line-up for leaks after pumping is started.
4. When off-loading is complete the system should be secured in accordance with part (8).

FUEL OIL TRANSFER PROCEDURES

(3) Personnel Requirement for Fuel Oil Transfer

For loading and off-loading of fuel oil, a minimum of one person in charge and two transfer personnel are required to be on duty for the entire duration of the operation.

For transferring of fuel oil between the tanks within the vessel a minimum of one person in charge and one transfer personnel are required to be on duty for the entire duration of the transfer operation.

(4) Duties of Required Personnel for Fuel Oil Transfer

Duties of Person in Charge

The person in charge is designated by the operator and shall hold a valid license as a master, mate, pilot, engineer, or operator. The person in charge will generally be attending duties in the pilothouse but may be temporarily below deck as required. In the event that the person in charge is not in the pilothouse, a designated person with communications capabilities must be in the vicinity of an emergency shutdown switch. The person in charge is responsible for seeing that the following is accomplished:

1. Assume responsibility for the vessel in filling out the declaration of inspection before commencing transfer operations. All items on this declaration must be fully understood and agreed upon by the deliverer and recipient of cargo and any discrepancies will be noted in writing.
2. Read, understand, and follow this procedure.
3. Expedite transfer of fuel oil without causing any damage to the vessel, its equipment or environment.
4. Constantly watch for any changes in condition that could cause any spill.

FUEL OIL TRANSFER PROCEDURES

5. Notify the proper person(s) in case of a spill. The procedure for spill reporting is found in part (9) of this procedure.
6. Proper tending to the vessel's moorings as specified in part (5).
7. Take charge of all topping operations as specified in part (7).
8. Properly secure vessel and equipment upon termination of transfer as specified in part (10).
9. Remove all spillage from containment boxes as specified in part (8).
10. Instruct and direct the transfer personnel.

Duties of Transfer Personnel

The person in charge designates the transfer personnel. Acceptable transfer personnel shall include; persons designated by the person in charge, qualified deck hands, AB/OS, or qualified crew. Passengers or persons other than crew will not be acceptable for use as transfer personnel. For loading and off-loading one-transfer personnel will be located at the appropriate deck connection and another transfer personnel will be located in the engine room attending the transfer equipment. For transferring operations (within the vessel) it is not necessary to have a transfer personnel located on deck. The transfer personnel are responsible for seeing that the following is accomplished:

1. Follow instructions of the person in charge.
2. Maintain communication with the person in charge.
3. Initiate an emergency shut-down to stop the transfer operation whenever oil or hazardous material from any source is discharged:
 1. In the transfer operation work area; or
 2. Into the water or upon the adjoining shoreline in the transfer area.

8

FUEL OIL TRANSFER PROCEDURES

4. Immediately report any spills or leakage or potential hazards to the person in charge.

(5) Mooring Duties for Oil Transfer

Deck Officer on Watch - In charge of tying up and letting go of mooring. Insure proper signals hoisted or lit aloft and scuppers plugged.

Bosun, AB's, & OS's - Assist as directed in mooring. Rig ladder during ship to barge operations.

(6) Emergency Shut-Down

For loading, immediate means of communication with the fueling facility must be made available in order to request that the pumping be stopped if an emergency shutdown were to become necessary. If loading from a barge, an emergency stop switch should be given to the vessel by the barge unit.

For off-loading fuel from the ship or transferring fuel within the ship, immediate communication with the transfer personnel attending the transfer equipment is necessary in order to request that the pumping be stopped and appropriate valves be closed. In the event that an emergency shut-down is necessary, appropriate personnel must activate the shut-down. An emergency stop button for the pumps is located on the control panels. These control panels are located in the pilothouse, near the liquid mud and fuel oil fill connection on main deck, and on the local pump control panel.

The person in charge must be able to maintain communication with the barge or shore side fueling facility and transfer personnel via voice, sound powered phone, or portable radio. If portable radios are used they must be intrinsically safe as defined in 46 CFR 110.15-100 and 46 CFR 11.80.

FUEL OIL TRANSFER PROCEDURES

(7) Topping Off

During topping off operations, the flow shall be continually reduced to a level that will allow controlled closure of the discharge valve to that tank and precludes overfilling or spillage. The tanks shall be continuously sounded to ensure tank levels during the topping off phase and continuous communication between the transferring and sounding personnel must be maintained. This phase of the transfer procedure is the most critical and requires the full attention of the person in charge.

(8) Transfer Completion

Once the transfer is complete: all pumping is stopped, all fill valves are closed, all connections drained and removed, and blank flanges replaced and secured with gaskets. The person in charge visually checks all valves and flanges to be sure they are closed after the oil transfer is complete.

Emptying of the Discharge Containment Areas

Containment areas are to be drained and cleaned so as to prevent any oil from spilling overboard. This is to be done by using a hand pump, rags, and/or absorbents. Collected spillage shall be properly disposed of to prevent any re-release because of torn bags or faulty containers. In addition to the required fixed containment area, at each oil tank vent, overflow, and fill pipe a 5 gallon portable container and rags should be placed to clean and collect any oil that might have spilled.

(9) Accidental Oil Discharges

AS SOON AS A SPILL IS SIGHTED, IMMEDIATE ACTION SHALL BE TAKEN TO STOP OR REDUCE THE SOURCE. REFER TO THE SHIPBOARD OIL POLLUTION EMERGENCY PLAN. REPORT ALL SPILLS TO EDISON CHOUSET OFFSHORE DISPATCHER OR PERSON IN CHARGE AT (985) 632-7144, THEN TO THE NATIONAL RESPONSE CENTER AT 1-800-424-8802.

FUEL OIL TRANSFER PROCEDURES

(10) Closing and Opening the Vessels Openings

The person in charge is to ensure that the vessel is properly secured and equipment stowed upon transfer completion. This includes, but is not limited to:

1. Dogging of all hatches, ullages, doors vents, sounding ports, and any other vessel openings that maintain the seaworthy condition of the vessel and prevent the inadvertent release of oil or hazardous material in the event of an accident.
2. Securing booms, cargo hoses and any other gear that is not permanently fastened to the hull that might move while the vessel is underway.
3. Closing of all fuel valves necessary to prevent shifting of fuel.
4. Remove all spillage from containment boxes using rags or "sugie" cloth to soak up excess oil.

(11) Transfer Hose Markings

Hoses used for the transfer of hazardous materials are to be marked or stenciled as follows, with:

1. The name of the product for hose intended service.
2. Maximum working pressure.
3. Minimum service temperature for service at other than ambient temperature.
4. Manufacture date.
5. Date of latest possible pressure testing in accordance w/ USCG 33 CFR 156.170.

M.5 PRODUCT SPECIFICATION FOR LOW SULFUR DIESEL FUEL OIL

MARKETING AND SUPPLY SALES SPECIFICATION LOW SULPHUR DIESEL LIGHT

Effective: June 1, 2006

Location: Western Canada.

PARAMETER	MIN	MAX	TEST METHOD
Appearance	Clear and Bright		Visual
Ash, % mass		.010	ASTM D482
Colour	Report		ASTM D156, D1500
Distillation - 10% Recovered, °C		215.0	ASTM D86
Distillation - 90% Recovered, °C		290.0	ASTM D86
Density, kg/M3		850	ASTM D1298, D4052
Cetane Number	40.0		ASTM D613
Corrosion - Copper - 3 hrs @ 50°C		No. 1	ASTM D130
Electrical Conductivity, pS/m			ASTM D2624
September 01 - April 15 @ 20°C	200 (1)		
April 16 - August 31 @ 20°C	100 (1)		
Flash °C	40.0 (2)		ASTM D93, D3828
Lubricity	Meets Requirements		CAN/CGSB 3.517 Para 6.22
Mercaptan Sulphur, ppm		120	ASTM D3227
Micro Carbon Residue - 10 % Btms, % mass		0.10	ASTM D4530
Operability, °C	See Table A		ASTM D2500, D5773, CGSB 140.1
Pour Point, °C	Report		ASTM D97, D5949
Sulphur, mg/kg			ASTM D5453, D7039
Up to Aug 31st, 2006		500(3)	
September 1, 2006		15(4)	
Total Acid Number, mg/KOH/g		0.10	ASTM D974
Viscosity @ 40°C, cSt	1.30	3.00	ASTM D445
Water and Sediment, % vol		0.05	ASTM D1796(mod), D2709

TABLE A
CLOUD SCHEDULE (°C)

Terminal	Jan	Feb	Mar	Apr	May	June	July	Aug	Sept	Oct	Nov	Dec
Vancouver	-34	-34	-34	-34	-34	-34	-34	-34	-34	-34	-34	-34
Nanaimo	-34	-34	-34	-34	-34	-34	-34	-34	-34	-34	-34	-34
Victoria	-34	-34	-34	-34	-34	-34	-34	-34	-34	-34	-34	-34
Kamloops	-37	-37	-34	-34	-34	-34	-34	-34	-34	-34	-34	-37
Prince George	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43
Terrace	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43
Calgary	-37	-37	-34	-34	-34	-34	-34	-34	-34	-34	-34	-37
Edmonton	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43
Regina	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43
Saskatoon	-43	-43	-34	-34	-34	-34	-34	-34	-34	-34	-43	-43
Winnipeg	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43	-43
Hay River- Truck	-45	-44	-43	-43	-43	-43	-43	-43	-43	-43	-43	-45
Hay River-Marine	-48	-48	-48	-48	-48	-48	-48	-48	-48	-48	-48	-48
Whitehorse	-48	-48	-48	-48	-48	-48	-48	-48	-48	-48	-48	-48

- Notes: (1) The fuel's minimum electrical conductivity shall apply at the shipping terminal.
 (2) The fuel's minimum flash point shall be 43°C at the shipping terminal.
 (3) The maximum sulphur will be 8 mg/kg at the refinery flange into pipeline, and 10 mg/kg into refinery connect rail & truck rack. Terminal storage will be converted to 12 mg/kg or less during the transition period of June through August.
 (4) The maximum sulphur at the refinery "flange" will be 8 mg/kg into pipeline, and 10 mg/kg maximum into refinery connect rail or truck rack.

Meets: Automotive Low Sulphur Diesel Fuel, CAN/CGSB 3.517-2000 Type A-LS,
 Regular Sulphur Diesel, CAN/CGSB-3.6-2000 Type A

THIS PAGE
INTENTIONALLY
LEFT BLANK

TABLE OF CONTENTS

APPENDIX N ADEC SUPPLEMENT		N-1
N.1	ADEC-SPECIFIC SCENARIO RESPONSE PLANNING STANDARD DISCHARGE UNCONTROLLED SUBSEA WELL RELEASE DURING SUMMER MONTHS.....	N-1
	N.1.1 Introduction.....	N-1
	N.1.2 Response Scenario Parameters	N-1
N.2	RECOVERY STRATEGIES.....	N-11
N.3	SURFACE CONTROL AND SUBSEA CAPPING AND CONTAINMENT CAPABILITY.....	N-12
	N.3.1 Introduction.....	N-12
	N.3.2 Surface Control Options.....	N-12
	N.3.3 Subsea Capping and Subsea Containment Capability	N-13
N.4	PREVENTION PLAN [18 AAC 75.425(e)(2)]	N-14
	N.4.1 Prevention, Inspection, and Maintenance Programs [18 AAC 75.425(e)(2)(A)]	N-14
	N.4.1.1 Prevention Training Programs [18 AAC 75.020].....	N-14
	N.4.1.2 Substance Abuse Programs [18 AAC 75.007(e)]	N-144
	N.4.1.3 Medical Monitoring [18 AAC 75.007(e)].....	N-15
	N.4.1.4 Security Program [18 AAC 75.007(f)]	N-15
	N.4.1.5 Fuel Transfer Procedures [18 AAC 75.025].....	N-16
	N.4.1.6 Maintenance Programs	N-18
	N.4.1.7 Operating Requirements for Exploration [18 AAC 75.045].....	N-18
	N.4.1.8 Blowout Prevention and Emergency Shutdown [18 AAC 75.425(e)(1)(I)].....	N-188
	N.4.1.9 Oil Storage Tanks [18 AAC 75.065]	N-26
	N.4.1.10 Emergency Tow and Escort Vessels Program	N-27
	N.4.2 Discharge History (>55 Gal) [18 AAC 75.425(e)(2)(B)].....	N-27
	N.4.3 Analysis of Potential Discharges [18 AAC 75.425(e)(2)(C)].....	N-27
	N.4.3.1 Potential Areas for Discharge.....	N-27
	N.4.4 Operational Conditions Increasing Risk of Discharge [18 AAC 75.425(e)(2)(D)]	N-30
	N.4.4.1 Severe Weather	N-30
	N.4.4.2 Ice Conditions	N-31
	N.4.4.3 Structural Icing.....	N-32
	N.4.4.4 Critical Operations and Curtailment Plan.....	N-32
	N.4.4.5 Hours of Light at 71°N Latitude	N-33
	N.4.5 Discharge Detection [18 AAC 75.425(e)(2)(E)]	N-34
	N.4.5.1 Drilling Operations.....	N-34
	N.4.5.2 Automated Methods	N-34
	N.4.6 Rationale for Claimed Prevention Credits [18 AAC 75.425(e)(2)(F)]	N-34
	N.4.7 Compliance Schedule [18 AAC 75.425(e)(2)(G)]	N-34
N.5	BEST AVAILABLE TECHNOLOGY [18 AAC 75.425(e)(4)].....	N-35
	N.5.1 Communications [18 AAC 75.425(e)(4)(A)(i)].....	N-36
	N.5.2 Source Control [18 AAC 75.425(e)(4)(A)(i)].....	N-37
	N.5.2.1 Well Source Control	N-37
	N.5.2.2 Tank Source Control	N-41
	N.5.3 Trajectory Analyses [18 AAC 75.425(e)(4)(A)(i)]	N-41

N.5.4	Wildlife Capture, Treatment, and Release Programs [18 AAC 75.425(e)(4)(A)(i)]	N-42
N.5.5	Cathodic Protection [18 AAC 75.076(h)(4)(A)(ii)].....	N-42
N.5.6	Leak Detection Tanks [18 AAC 75.425(e)(4)(A)(ii)]	N-42
N.5.7	Tank Liquid Level Determination [18 AAC 75.425(e)(4)(A)(ii)].....	N-42
N.5.8	Maintenance Procedures for Buried Steel Piping [18 AAC 75.425(e)(4)(A)(ii)]	N-46
N.5.9	Protective Wrapping or Coating for Tanks and Pipeline [18 AAC 75.425(e)(4)(A)(ii)]	N-46
N.5.10	Corrosion Surveys for an Existing Installation	N-46
N.5.11	Pipeline Leak Detection	N-46
N.6	RESPONSE PLANNING STANDARDS [18 AAC 75.425(e)(5)]	N-46
N.6.1	Well Blowout	N-46
N.6.2	Fuel Transfer Strategy [18 AAC 75.025]	N-46
N.6.3	Rationale for Claimed Prevention Credits [18 AAC 75.425(e)(2)(F)]	N-46

FIGURES

Figure N.4-1	Models for Site-Specific Well Control	N-21
Figure N.4-2	Real Time Operations Center.....	N-23
Figure N.4-3	Example of a BOP	N-24
Figure N.4-4	<i>Discoverer</i> Drillship Blowout Prevention Equipment System	N-25

TABLES

Table N.1-1	ADEC-Specific Scenario Uncontrolled Subsea Well Release During Summer Months.....	N-2
Table N.1-2	ADEC-Specific Scenario Uncontrolled Subsea Well Release During Summer Months.....	N-4
Table N.1-3	Well Blowout in Summer Response Equipment Mobilization Chart for Open Water Task Force	N-10
Table N.4-1	Summary of Potential Discharges	N-28
Table N.4-2	Potential Discharge for Alaska Offshore Drilling (1997 to 2003).....	N-29
Table N.5-1	Best Available Technology Analysis Well Blowout Source Control.....	N-39
Table N.5-2	Best Available Technology Analysis Leak Detection for Tank	N-44
Table N.5-3	Best Available Technology Analysis Tank Liquid Level Determination System.....	N-45
Table N.6-1	Well Blowout in Summer Derated Potential Recovery Capability	N-48

APPENDIX N ADEC SUPPLEMENT

N.1 ADEC-SPECIFIC SCENARIO RESPONSE PLANNING STANDARD DISCHARGE UNCONTROLLED SUBSEA WELL RELEASE DURING SUMMER MONTHS

N.1.1 Introduction

ADEC regulations (18 AAC 75.434) establishes the RPS for an exploration facility to be 5,500 bopd, or best producing well data, for the duration of 15 days. For planning purposes, the ADEC RPS is presented using BSEE's WCD volume, 25,000 bopd for 15 days totaling 375,000 bbl. Based upon ADEC guidance, the RPS storage capacity requirements consider the emulsification factor of 1.54 and free water additions for a total storage volume of 652,500 bbl.

N.1.2 Response Scenario Parameters

This RPS scenario was developed to specifically describe a response that addresses each of the ADEC-compliant regulations of 18 AAC 75.425. The following RPS scenario is provided as a courtesy to ADEC. This scenario is not a guarantee of performance. Rather, it is an illustration of the spill and response conditions that could be expected in the event of a loss of primary well control. The scenario makes certain assumptions about spill conditions and describes equipment, personnel and strategies that would be used to respond to a RPS volume spill.

In the unlikely event primary well control was lost, the well would be secured and physically shut-in in less than three minutes. This scenario and response timeline are presented only for the purposes of demonstrating Shell's response capabilities and meeting contingency planning requirements. In a real event, spill response decisions depend on a host of considerations including: safety, weather and other environmental conditions. It is the discretion of the IC and PICs of the spill response to select any sequence or take as much time as necessary to employ an effective response without jeopardizing personnel safety. As in any incident, personnel safety is the highest priority.

Simulated weather and sea conditions, oil characteristics, aerial deposition, oil trajectory modeling and resources of importance are as described in Appendix C of this OSRP (WCD Scenario). The differences between this ADEC-Specific Scenario and the WCD Scenario are:

- well location for the ADEC-Specific Scenario is Burger F, and
- ADEC-Specified Scenario duration is 15 days (instead of 30 days for the WCD Scenario).

All other parameters for the ADEC-Specific Scenario are as described in Appendix C of the OSRP (WCD Scenario).

Table N.1-1 describes the initial conditions at the time of the release scenario. Table N.1-2 presents the overall response strategy and Table N.1-3 depicts mobilization of response equipment by task force.

**Table N.1-1
ADEC-Specific Scenario
Uncontrolled Subsea Well Release During Summer Months**

INITIAL CONDITIONS	
Spill Location	Shell Exploration Well, drilled by the drillship <i>Discoverer</i> at the Burger F wellsite (71° 20' 13.96" N, 163° 12' 12.75" W)
Date	August 7
Duration	15 Days
Type of Spill	25 to 30° API Crude Oil
Source of Spill	Loss of well control at the mudline in 140 ft of water
Quantity of Oil Spilled	RPS Volume = 25,000 bopd x 15 days = 375,000 bbl No deductions were made to the RPS volume to account for burning or evaporation.
Emulsification Factor and free water pickup	1.54 x 375,000 bbl = 577,500 bbl. This is the oil emulsion volume created by skimming/pumping operations. Assuming that approximately 20% of the original oil volume recovered is added to this mix as free water (approximately 75,000 bbl), the total volume of fluids (emulsion + free water) could conceivably require approximately 652,500 bbl.
Average Wind Speed	10 to 11 knots
Wind Direction	Prevalent winds are from the ENE. Wind direction and velocity data were derived from measurements collected by Shell in the Chukchi Sea from 1980, 1982, and 1983 during the period June 15 to November 15. The ocean current generally flows to the NNE. The trajectory depicted on in Appendix C (Predicted Subsea Blowout Trajectory) was based upon the actual measured winds at the nearest station to the spill location from August 7 to September 6 of 1980. Based upon collected wind data, three primary wind directions emerge with a daily persistence greater than 10%: ENE, NE, and E. On average these wind directions occurred at the following measured frequencies for the June through November period: <ul style="list-style-type: none"> • 14.6% ENE • 13.8% NE • 13.0% E
Air Temperature	Average daily maximum and minimum temperatures were obtained from the Western Regional Climate Center website: http://www.wrcc.dri.edu/cgi-bin/cliMAIN.pl?ak0558 The average daily maximum and minimum air temperatures for August are 46°F and 34°F, respectively.
Surface Current	The ocean current data used for trajectory modeling was based upon the MMS annual means analysis of Haidvogel, Hedstrom, and Francis (2001) coupled ice-ocean model.
Visibility	Variable
Surface	The prospect is located in federal waters of the Chukchi Sea. Wave heights are typically 1.5 to 2.5 ft with no ice present. The OSR vessel is located within 10 n mi of the drillship and the OSR barge is staged approximately 25 n mi. Based upon a realistic average transit speed of 10 knots, the OST is located in the Chukchi Sea to ensure its arrival at the recovery site within 24 hr of mobilization. A Nearshore OSR barge is staged at a location from which it can mobilize to the Chukchi Sea nearshore zone within 96 hr.

**Table N.1-1 (Continued)
 ADEC Specific Scenario
 Uncontrolled Subsea Well Release During Summer Months**

INITIAL CONDITIONS	
Trajectory	<p>Modeling of the oil plume trajectory was conducted by ASA using historical wind data and the MMS hydrodynamic ocean-ice current model.</p> <p>The trajectory model uses OILMAP software developed by ASA. Based on environmental conditions including predominant winds and currents, the output from this model shows estimated oil concentrations and slick movement over time. Additionally, ASA's SIMAP software provides probabilities and estimated contact timing if oil were to reach shorelines from a potential blowout. The ASA trajectory models include algorithms for spreading, evaporation, emulsification, and entrainment, all of which are input parameters based on the properties of the crude oil. The results provide graphical representation for instantaneous or continuous release spill volumes on water through time.</p> <p>Input parameters include a spill volume of 25,000 bopd using ANS crude oil with API gravity of 30.6°. The ASA trajectory model was run using historical wind data collected by Shell for the initial blowout date and duration. The figure shows the model at 72 hr into the spill and identifies the predicted surface oil concentrations from the blowout and slick direction.</p> <p>The simulated oil discharge of 25,000 bopd is ejected through a 6-inch ID well at the mudline, in water approximately 140 ft deep. Within minutes of the well release, oil rises to the surface of the sea. The oil plume migrates to the southwest as a function of water currents and the direction of the prevailing wind.</p> <p>Within 72 hr, if the oil remains uncontained and not recovered, the leading edge of the plume would extend roughly NE of the spill site for approximately 17 n mi. Refer to Appendix C.</p>

**Table N.1-2
ADEC-Specific Scenario
Uncontrolled Subsea Well Release During Summer Months**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
(i) Stopping Discharge at Source	<p>As soon as the well kicks, subsurface well control, such as increasing the drilling mud weight, is initiated. Initial actions, including the attempted closing of the BOP rams fail. Other well control attempts are unsuccessful, and the Burger F exploration well is now classified as an “unobstructed” well release (T= 00 hours). The well has a continuous flow rate that will deposit at the surface a total of 25,000 bopd.</p> <p>The On-site Shell Drilling Foreman notifies the OSC who notifies response personnel on the OSR vessel and OSR barge accompanying the drilling ship and activates Shell’s OSRO and response contractors. Notifications to appropriate state and federal agencies, including BSEE, are performed. The NRC is notified and the IMT is activated.</p> <p>The Shell OST and the Nearshore OSR barge are also notified and immediately mobilized. Upon arrival, the Shell OST is positioned within a safe distance approximately 25 n mi to the well release.</p> <p>Well control is discussed in Section N.3 of this Appendix (Surface Control and Subsea Capping and Containment Capability). The drillship is undamaged and, after Safety analyzes the situation, a decision is made to move the drillship away from the area of the surfacing well release.</p>	<p>ACS Volume 3 ICS Shell LE-2</p> <p>Table 2.7.1-2, Section 2.7 of the OSRP</p> <p>ACS A-1, A-2</p>
(ii) Preventing or Controlling Fire Hazards	<p>Throughout the first few hours of the spill, the Site Safety Officer verifies that all sources of ignition are shut down or removed from the area. The Site Safety Officer provides access zone information and determines PPE requirements. Monitoring protocol is established for all work areas to ensure personnel protection. The monitoring protocol establishes safety zones according to applicable OSHA and fire hazard standards.</p> <p>Consideration is given to pull anchors and move the drillship from the well release. Once the drillship has been moved, the FOOSC approves the ignition of the surfacing plume for safety reasons.</p>	<p>Shell S-1 through S-4</p> <p>ACS S-1 through S-6</p>
Well Control Plan	<p>Well control is consistent with that described in Appendix C (WCD Scenario) with the exception that well site is Burger F. The Blowout Contingency Plan is initiated, of which relief well drilling is one sub-component.</p> <p>T + 4 Days. Although available on site, for planning purposes, specialty equipment and personnel required for secondary well control arrive at the drillship. Plans are to close the blind shear rams, located on the BOP stack, remotely using an ROV to activate the subsea control panel. Hypothetically, on arrival, it is discovered the ROV was damaged in shipping. Repair parts for the ROV are ordered, but the ETA is several days. Other options are considered, including a diver and diver support requirements.</p> <p>T + 5 Days. The diver option is rejected due to safety concerns.</p> <p>T + 7 Days. ROV repair parts arrive in Barrow, but due to inclement weather (poor visibility), it is not transferred to an awaiting vessel at Wainwright.</p> <p>T + 13 Days. ROV repair parts arrive at the drillship and the ROV is repaired.</p> <p>T + 15 Days. ROV successfully activates the subsea BOP control panel and activates the blind shear rams on the BOP stack. The well bore is secured and the discharge is stopped.</p>	<p>Section N.3 of this Appendix</p>
(iv) Surveillance and Tracking of Oil	<p>Oil movement is tracked using a combination of visual observations and remote sensing techniques. Within the first hours of initial notification of the well release, a FLIR equipped aircraft is deployed. Response vessels also deploy buoys with transmitters. Both systems are capable of real-time tracking of the leading edge of the oil. Oil location information is digitized and transferred to the IMT and OSC for response planning and trajectory modeling. Satellite tracking of oil is initiated (RadarSat or EnviroSat) and coordinated with the use of tracking buoys.</p>	<p>Shell TS-1, TS-2, TS-3</p> <p>ACS T-4, T-5</p>

Table N.1-2 (Continued)
ADEC-Specific Scenario
Uncontrolled Subsea Well Release During Summer Months

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
	The NOAA and/or ASA OILMAP are requested to provide trajectories based on wind speed and direction. Vector addition and trajectory modeling are used to forecast oil and movement based upon field measurements.	
(v) Exclusion Procedures; Protection of Sensitive Resources	<p>The EU's Cultural Resource Specialist and State Historic Preservation Officer issue an advisory. The NOAA ESI maps, ACS Map Atlas, and the North Slope Sub-area Contingency Plan are used to identify areas of major concern.</p> <p>The initial oil trajectories have resulted in the primary spill recovery efforts being focused to the SW of the drill site. Based upon historical wind data and the MMS current model, the ASA trajectory predicts that without containment and recovery the earliest potential oil contact with shorelines would not occur until Day 25. However, in the unlikely event strong, sustained winds develop out of the WNW, trajectory modeling estimates that six (6) days is the earliest possible time oil could reach shore. As a precaution, Shell mobilizes to implement protection strategies at priority resource sites. In addition to ACS and ARS, the Nearshore OSR barge is mobilized from its staging location to the Peard Bay vicinity to support nearshore protection and recovery if sustained WNW winds develop.</p> <p>Based on trajectory calculations and oil tracking, a 50-mi section of coastline consisting of barrier islands and exposed mainland is identified as the potential impact zone. Protection sites (PS-168, PS-169, PS-170, PS-171, PS-172, PS-173 and PS-174) are identified along the Chukchi Sea coastline for priority exclusion or deflection booming. Trajectory model runs are performed throughout the response using field-collected data to track oil and assess protection priorities.</p> <p>The NOAA ESI Maps, ACS Atlas Maps, and the North Slope Subarea Contingency Plan are used to identify areas of major concern. The EU Leader coordinates with resource agency representatives and local representatives to prioritize resource sensitivities and activate protection guidelines. The Cultural Resource Specialist and SHPO coordinate to identify sites of concern and advise Operations of necessary site protection needs.</p> <p>The EU begins development of a shoreline protection plan, and SCAT are placed on standby.</p> <p>T + 4 Days. Shell's Shoreline Protection Task Forces deploy deflection or exclusion booms at PS-174 to protect the Sinaruruk River; PS-173 and PS-172 to protect lagoons at Point Belcher; PS-171 at the entrance of Kugrua Bay; PS-170 to protect an unnamed river on the south shore of Peard Bay; and PS-169 and PS-168 to protect unnamed rivers. The Nearshore OSR barge is mobilized and positioned to be centrally located to perform nearshore free oil recovery and support task forces and shoreline protection sites.</p> <p>Shell has the capability of mounting an effective shoreline response to supplement the primary response operation as necessary.</p>	<p>NOAA ESI Maps ESI 14-16</p> <p>ACS Map Atlas Sheets 251 - 255</p> <p>http://www.asgdc.state.ak.us/maps/cplans/subareas.html#northslope</p> <p>MESA 4 – Peard Bay/Franklin Spit</p> <p>Shell SR-1</p> <p>ACS SH-1</p> <p>Shell SR-2 through SR-5</p> <p>ACS C-13, C-14</p> <p>Shell OR-1A, OR-1B OR-4A, OR-4B</p>
(vi and vii) Spill Contain, Control and Recovery Procedures	<p>TF Descriptions:</p> <p>TF-1: Primary response is provided by equipment stationed near the drillship This equipment includes: an OSR vessel (11,400 bbl storage) with two (2) Lamor brush skimmers, three (3) 34-foot workboats, and containment and fire boom.</p> <p>TF-2: Operating in relief of TF-1, an OSR barge (76,900 bbl storage), equipped with two (2) Transrec 150 skimmers performs oil recovery operations while TF-1 is off-loading recovered oil to TF-3.</p> <p>TF-3: An approximately 513,000 bbl tanker located in close proximity to the drilling location is deployed immediately. It arrives within 24 hr. Decanting (if required) follows FOOSC plan and USCG approval. TF-3 provides oil storage capacity for lightering from TF-1, TF-2, TF-4 and TF-5.</p>	<p>Shell OR-2A, OR-2B</p> <p>ACS R-18, R-32A</p> <p>Shell OR-3A</p> <p>ACS R-28</p>
	TF-4: consists of a VOSS with a minimum storage capacity of 13,000 bbl. Response assets aboard the VOSS include one (1) Transrec 150. TF-4 arrives on-	Shell OR-10

**Table N.1-2 (Continued)
ADEC-Specific Scenario
Uncontrolled Subsea Well Release During Summer Months**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
	<p>scene from its staging location at Hour 42.</p> <p>TF-5 consists of a VOSS with a minimum storage capacity of 8,000 bbl. Response assets aboard the VOSS include one (1) Transrec 150 skimmer. TF-5 arrives at the scene from its staging location at Hour 42.</p> <p>TF-6: The Nearshore OSR barge with 17,000 bbl of onboard storage. The OSR barge is mobilized from a staging area to arrive on location within 96 hr. The OSR barge provides a mobile on-water recovery system and staging platform. It is equipped with two (2) Lamor LSC-5 skimmers; one (1) 47-ft skimming vessel with built-in Lamor LORS-2C brush skimmers; three (3) 34-ft work boats; four (4) mini-barges; 2,500 ft ocean boom; one (1) vertical rope mop; one (1) duplex mini-brush/disc skimmer; and one (1) 100-bbl storage bladder.</p> <p>TF-7: Pre-staged response equipment and personnel at Wainwright and mobilized to deploy exclusion and deflection boom at priority protection sites. The primary objective of TF-6 is to prevent oil from impacting sensitive resources. TF-6 is also supported by the Nearshore OSR barge. TF-6 consists of two (2) landing craft; two (2) work boats; 10,000-ft conventional boom; 10,000-ft coastal boom; and 4,000-ft shore seal boom.</p> <p>TF-8: Response equipment and personnel (ARS, AES-RO, ACS, NSSRT, ACRT, and VRTs) mobilized to perform shoreline cleanup. Based upon shoreline type and oiling conditions, cleanup is performed by 6 or 7 strike teams. Containment and recovery tactics are used to remove oil from the shoreline. The recovered oil is stored in temporary holding containers (portable folding tanks, bladders, and lined pits). TF-7 would access shorelines using the two (2) landing craft and two (2) work boats (shared with TF-6). Additional small boats, boom, portable tanks and bladders are mobilized to the area during the first 6 days (the earliest time oil is predicted to impact shorelines).</p> <p>Recovery Timeline:</p> <p>T + 1 Hour. TF-1 is deployed immediately and locates to a safe distance from the well release. A vessel-based boom-skimmer system deploys downwind/down-current of the blowout, ahead of the leading edge of the oil plume. The objective of TF-1 is to recover oil shortly after it surfaces and begins to move from the location. While the burning of the well would likely eliminate some of the surfacing oil, it is assumed here (for planning purposes) that the full RPS of 25,000 bopd (1,042 bbl/hr) continues to flow from the well. The recovery rate is based upon the planning assumption that a 90% fraction of the daily release volume (938 bbl/hr) remains offshore for recovery and a 10% fraction (104 bbl/hr) may escape the primary offshore recovery operations and drift toward the nearshore and shorelines.</p> <p>TF-1 deploys two (2) 34-ft work boats with an open apex U-boom configuration down current. The OSR vessel operates two (2) Lamor LSC-5 skimmers with a combined derated recovery of 516 bbl/hr (2 X 258 bbl/hr).</p> <p>T + 3 Hours. TF-2 arrives on-scene equipped with two (2) Transrec 150 skimming systems. TF-2 relieves TF-1 to work in conjunction with the two (2) 34-ft workboats towing U-boom. TF-1 and one (1) 34-ft workboat continue skimming operations in a J-boom configuration. The volume of recovered liquids exceeds the volume of discharged oil (with emulsification).</p> <p>T + 24 Hours. The drillship is relocated a safe distance from any surfacing oil and gas. TF-2, equipped with two (2) Transrecs 150 skimming systems, maintains skimming while TF-1 disengages to lighter its recovered fluids to the OST. TF-1 can complete lightering operations within 8 hr. TF-2 has enough storage capacity to store recovered fluids for the next 24-hr period of continuous skimming during which time lightering operations from the TF-1 to the OST are completed.</p>	<p>ACS R-18, R-32A</p> <p>Shell OR-1A, OR-1B, OR-4A, OR-4B, OR 5A</p> <p>ACS R-32A, R-32B</p> <p>ACS C-13, C-14</p> <p>Shell SR-2 through SR-5</p> <p>ACS SH-3 and SH-5 through SH-12</p> <p>Shell OR-2A OR-2B</p> <p>ACS R-18, R-32A</p> <p>Table N.1-2</p> <p>Shell OR-2B</p> <p>ACS R-18, R-32A</p> <p>Shell OR-2B, OR 3A</p> <p>ACS R-18</p> <p>ACS R-28</p>
	<p>TF-3 has arrived from its standby location not far from the drill site. The primary objective of TF-3 is to provide offshore interim storage capacity for recovered fluids. Upon TF-3 arrival, TF-2 relieves the OSR vessel (TF-1) to lighter its</p>	<p>OR-3A</p> <p>ACS R-28</p>

**Table N.1-2 (Continued)
ADEC-Specific Scenario
Uncontrolled Subsea Well Release During Summer Months**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
	<p>recovered fluids to the OST.</p> <p>T + 42 Hours. TF-4 and TF-5 arrive on scene. TF-4 and TF-5 are each equipped with one (1) Transrec 150 skimming system. TF-2 continues recovery operations in configuration with the two (2) 34-ft workboats towing U-boom.</p> <p>T+ 48 Hours. TF-1, TF-4 and TF-5 relieve TF-2 to initiate its lightering operations to the OST. TF-1 skims using its two (2) Lamor LSC-5 skimmers within jib arm booms. TF-4 skims with one (1) Transrec operating in J-boom configuration towed by one (1) 34-ft workboat. TF-5 skims using one (1) Transrec inside U-boom towed by two (2) 34-ft workboats. The three task forces possess sufficient storage capacity to recover liquids during the 12-hr period during which TF-2 completes lightering operations.</p> <p>From this time forward in the response, TF-1, TF-4 and TF-5 alternate recovery and lightering operations with TF-2 so that skimming operations are maintained while lightering is conducted to the TF-3 OST. TF-1, TF-4 and TF-5 recover for 12 hr while TF-2 conducts lightering, then TF-2 relieves these three task forces and recovers for 24 hr while TF-1, TF-4 and TF-5 lighter. Recovery rates of TF-1, TF-2, TF-4 and TF-5 are detailed in Table N.1-3. The recovery capacity rate exceeds the rate that oil is released from the well.</p> <p>T + 96 Hours. Should oil escape offshore recovery operations, and in the unlikely event it moves toward the Chukchi shoreline, nearshore assets would be mobilized to implement nearshore response, shoreline protection and cleanup. At the very earliest, oil may reach shore on Day 6 if sustained NW winds develop.</p> <p>TF-6, consisting of the Nearshore OSR barge, arrives to provide support (e.g., platform, safe haven for personnel and vessels, response equipment, recovered fluid storage) for the nearshore recovery and shoreline response operations.</p> <p>TF-6 targets free oil in windrows and linear slicks. In addition to the OSR barge with LSC-5 skimmers, TF-6 includes one (1) 47-ft skimming vessel configured with two (2) side booms and two (2) built-in Lamor LORS-2C skimmers.</p>	<p>Shell OR-2B, OR-3A</p> <p>ACS R-17, R-32B, R-28</p> <p>Shell OR-2B, OR-3A</p> <p>ACS R-17, R-32B, R-28</p> <p>Shell OR-2B, OR-3A</p> <p>Shell OR-1A, OR-1B OR-4A, OR-4B, OR-5A</p> <p>Shell OR-1A, OR-1B OR-4A, OR-4B, OR-5A</p> <p>Shell SR-2 through SR-5</p>
	<p>Two (2) 34-ft work boats are deployed to tow boom for the concentration of oil and recovery by the 47-ft skimming vessel. The remaining 34-ft work boat shuttles personnel, supplies, and four (4) mini-barges.</p> <p>TF-7 is mobilized from Wainwright to implement shoreline protection strategies within the area of potential impact. TF-6 deploys pre-staged equipment consisting of (2) landing craft; two (2) work boats; 10,000 ft conventional boom; 10,000 ft coastal boom (6,000 ft from the Nearshore OSR barge and 4,000 ft pre-staged); and 4,000 ft shore seal boom. TF-7 is also supported by TF-6 and its personnel and equipment.</p> <p>Shell cascades additional crews, boom and workboats to priority protection sites selected by the UC.</p> <p>TF-8 is mobilized by Shell from Prudhoe Bay for shoreline cleanup operations in the unlikely event a sustained WNW wind results in impacts. The shorelines predicted at risk lie between the Sinaruruk River and Peard Bay. In the event recovery operations are necessary, shoreline recovery teams anchor boom to the shore in a hook configuration and recover oil with a skimmer into Fastanks or bladders.</p> <p>T + 5 days. Oil trajectory modeling predicts NE movement of oil. Oil recovery vessels adjust positioning accordingly.</p>	<p>ACS C-13, C-14</p> <p>Shell SR-5 through SR-10</p> <p>ACS SH-2 through SH-12</p>


**Table N.1-2 (Continued)
ADEC-Specific Scenario
Uncontrolled Subsea Well Release During Summer Months**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
	<p>T + 15 days. The ROV successfully activates the subsea BOP control panel, the well bore secured, and the discharge stopped. The volume of released oil is recovered.</p>	
<p>(viii) Lightering Procedures</p>	<p>Decanting (if required) follows FOSC plan approval within the OCS. Within state waters, decanting is subject to approval of the SOSOC. Stored liquids are offloaded from the OSR vessel and VOSS (TFs 1 & 2 respectively) to the OST.</p> <p>Based on a maximum RPS of 25,000 bbl/day (or 1,042 bbl/hr), a 1.54 emulsification factor and free water retained in storage (20% of the RPS), storage is necessary for approximately 1,631 bbl/hr of recovered fluids</p> <p>TF-1 has 11,400 bbl of storage volume (95 percent capacity) and TF-2 has 76,900 bbl (95 percent capacity) of storage. The combined storage capacity of TF-1 and TF-2 is more than sufficient to store recovered fluids until the OST arrives on scene.</p> <p>At hour 24, TF-1 disengages from skimming operations, transits to the OST, and commences offloading recovered fluids. TF-2 and the 34-ft workboats continue skimming operations and provide interim storage for the next 24 hr. TF-2 initiates lightering operations to the OST following the resumption of recovery by TF-1, TF-4 and TF-5 at Hour 48. Skimming and lightering operations are scheduled on a rotation basis for the duration of the response. TF-1, TF-4 and TF-5 recover for 12 hr while TF-2 lighters, and TF-2 recovers for 24 hr while TF-1, TF-4 and TF-5 complete lightering.</p> <p>The OST is staged approximately 25 n mi from the offshore recovery operations and approximately 35 n mi from nearshore operations so that transit times to and from the OST are kept to a minimum. The transfer of recovered fluids (after decanting forward of the skimmers) is accomplished using BAT; that is, annulus injection of water at a suction head to produce a low-friction transfer of viscous fluids between the skimmer's onboard storage and the OST. With high-volume transfer pumps and annulus injection, each transfer from TF-1, TF-4 and TF-5 to the OST should require only 3 to 4 hr with an additional 3 to 4 hr factored in for setup and transit to and from the OST. TF-2 would require approximately 5 to 6 hr for transfer and 3 to 4 hr for setup and transit. Using high-volume transfer pumps ensures offloading requires less than the 24 hr available for TF-1, TF-4 and TF-5 and 12 hr for TF-2 to complete transfer operations and transit to and from the OST.</p>	<p>ACS R-28</p> <p>Shell OR-3A</p>
<p>(ix) Transfer and storage of Recovered Oil/Water; Volume Estimating Procedure</p>	<p>Stored liquids are offloaded from offshore task forces to the OST. Liquids from the nearshore skimmer vessels are stored in mini-barges and transferred to the TF-6 Nearshore OSR barge.</p> <p>Liquids recovered by the shoreline recovery task forces are stored in Fastanks, bladders, mini-barges, or mobile tanks. Fluids may be transferred to secondary storage containers. See Appendix K.</p> <p>The volumes of stored oil emulsion and free water are gauged with ullage tape and recorded on waste manifests.</p>	<p>ACS R-28</p> <p>Shell OR-3A , OR-6</p>
<p>(x) Plans, Procedures and Locations for Temporary Storage and Disposal</p>	<p>A Waste Management Plan is developed in order to (1) fill out and sign manifests; (2) measure liquid and other wastes and (3) submit a plan to ADEC for waste management.</p> <p>Non-liquid oily wastes are classified and disposed of according to classification.</p> <p>Non-oily wastes are classified and disposed of accordingly.</p> <p>Recovered fluids stored onboard the OST and from nearshore and onshore recovery operations will be disposed of outside the U.S., either at Shell Group refineries or other third-party processors, in accordance with Shell environmental policy, and relevant local laws and regulations (see Appendix K).</p>	<p>Shell DP-1</p> <p>ACS D-1 through D-3</p> <p>Appendix K</p>
<p>(xi) Wildlife Protection Plan</p>	<p>Temporary facilities are established as necessary and made available to agency biologists and veterinarians standing by to respond to potential reports of oiled wildlife.</p> <p>PSOs are stationed aboard the primary drilling and support vessels. The EU coordinates with resource trustee agency representatives to develop and implement plans for wildlife hazing and/or rehabilitation of marine mammals.</p> <p>Aerial overflights include wildlife monitoring.</p>	<p>ACS W-3, W-4, W-5</p>

**Table N.1-2 (Continued)
 ADEC-Specific Scenario
 Uncontrolled Subsea Well Release During Summer Months**

ADEC REQUIREMENT	RESPONSE STRATEGY	CROSS REFERENCE
(xii) Shoreline Cleanup Plan	<p>Shoreline impact is not expected with the current trajectory; however, for planning purposes a percentage of the oil is projected to reach the nearshore environment as detailed in the narrative in this document (Appendix N) under N.2 Recovery Strategies.</p> <p>Shoreline cleanup operations are based on a plan approved by the UC. A shoreline assessment is conducted to understand the nature and extent of oiling. Based on the shoreline assessment, priorities are established for cleanup. Cleanup techniques chosen are based on shoreline type and degree of oiling.</p> <p>Primary delta and shoreline cleanup techniques include:</p> <ul style="list-style-type: none"> • Burning of oily vegetation, • Deluge of minor to moderately oiled shoreline in the river, including those areas where heavier concentrations were manually removed, and • Natural recovery for those areas where residual staining may remain, but further recovery would cause more harm than good. 	<p>Shell SR-1 ACS SH-1</p> <p>Shell SR-1, SR-5, SR-6, SR-7, SR-8, SR-9, SR-10</p> <p>ACS B-2 ACS SH-2, SH-3</p>

**Table N.1-3
Well Blowout in Summer
Response Equipment Mobilization Chart for Open Water Task Force**

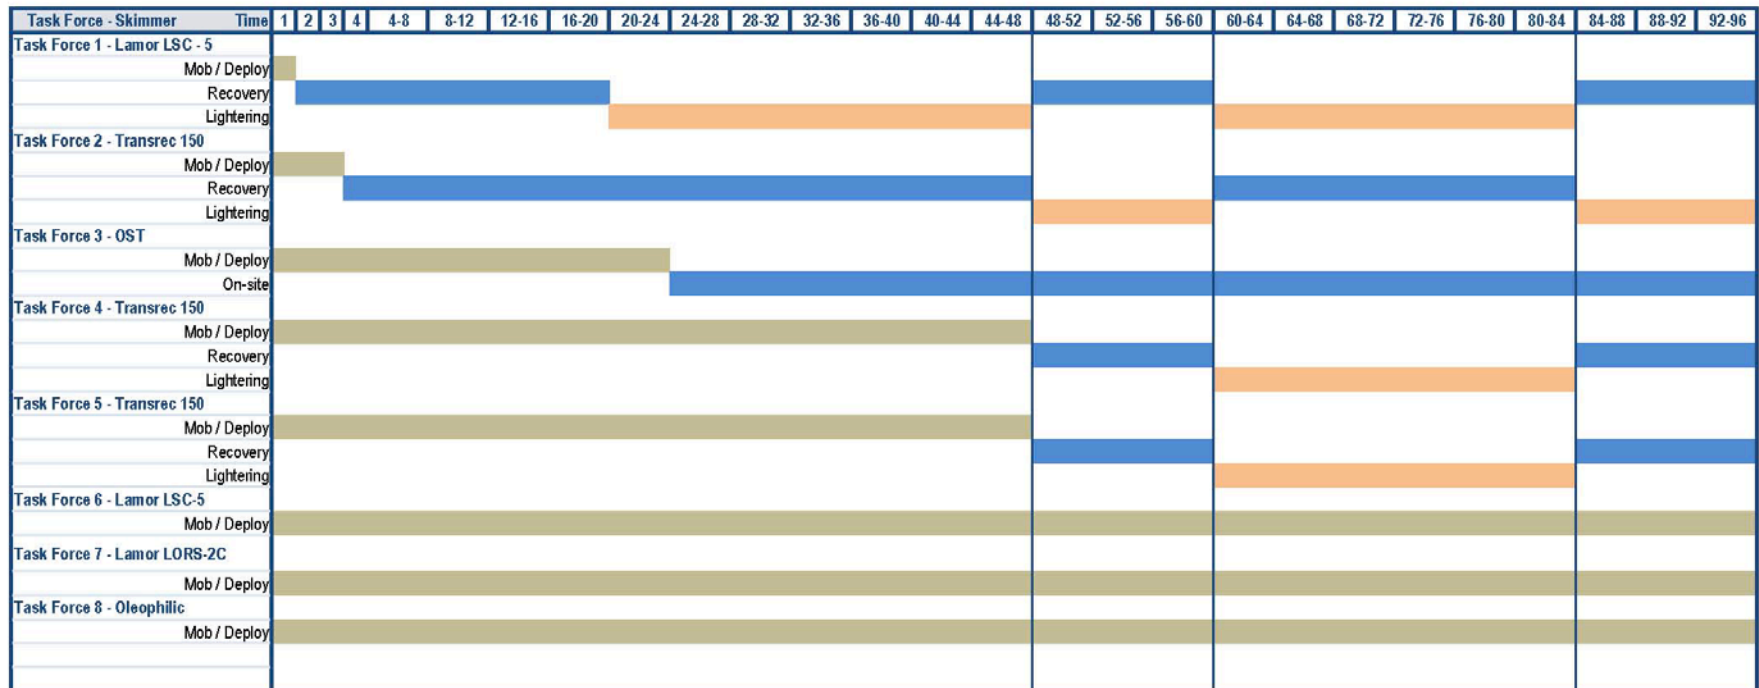

Notes:

1. Pumps are derated to 20% per 30 CFR 254.44 (a) and (b).
2. The offshore scenario recovery is based upon the planning assumption that a 90% fraction of the daily release volume (938 bbl/hr) remains offshore for recovery and a 10% fraction (104 bbl/hr) may escape the primary offshore recovery operations and drift toward the nearshore and shorelines. The derated recovery capacity of the listed operating skimmers exceeds the estimated quantity of oil available for recovery within a 24 hr period.
3. The nearshore recovery rate is based upon the planning assumption that a 10% fraction of the daily release volume (104 bbl/hr) may escape the primary offshore recovery operations and drift toward the nearshore and shorelines. Based upon trajectory modeling, oil would reach the nearshore at the earliest after Day 6 and only in the unlikely event of sustained winds from the W or WNW. The scenario trajectory developed using historical winds and the BOEMRE Chukchi current model shows that oil has a low probability of shoreline contact by Day 28.

Alternating Recovery/Lightering Cycle is established after Hour 48

TF	Tactic	TF Skimmer	Derated Capacity	Units	Total	Storage Capacity
TF-1	ACS R-18, R-20 Shell OR-2A, OR-2B	Lamor LSC -5	258 bbl/hr	2	516 bbl/hr	11,400 bbl
TF-2	ACS R-18, R-32A Shell OR-2B	Transrec 150	503 bbl/hr	2	1006 bbl/hr	76,900 bbl
TF-3	ACS R-28 Shell OR-3A					513,000 bbl
TF-4	Shell OR-10	Transrec 150	503 bbl/hr	1	503 bbl/hr	13,000 bbl
TF-5	Shell OR-10	Transrec 150	503 bbl/hr	1	503 bbl/hr	8,000 bbl
Total:					2,528 bbl/hr	622,300 bbl

N.2 RECOVERY STRATEGIES

Recovery strategies are discussed in the scenarios (Section N.1 of this Appendix; Appendix C – WCD Scenario; and Appendix M – USCG Supplement), the Shell Tactics Manual, and the ACS Technical Manual.

Because of safety concerns, operations will be restricted or limited to appropriate distances from the blowout source. This statement does not indicate or imply a complete prohibition of activities such as containment and recovery close to the blowout. Personnel safety is Shell's primary concern. The On-scene Safety Officer provides access zone information and determines PPE requirements. Access to the blowout site is carefully controlled. Monitoring protocol is established by the On-scene Safety Officer to ensure personnel protection. Should a subsea blowout result in the release of large quantities of free gas and volatiles from the evaporation of surfacing oil, a rapid assessment will be made of deliberate ignition of those vapors. If authorized by the UC, such deliberate and controlled ignition will reduce the risks of an accidental ignition and the potential exposure of personnel and vessels downwind.

Primary response is provided by equipment stationed in the vicinity of the drillship. This equipment includes TF-1 which consists of a dedicated on-site OSR vessel with a 12,000 bbl storage capacity (11,400 bbl at 95 percent capacity); two (2) brush skimmers; three (3) 34-ft work boats; and open-ocean containment boom and fire boom. TF-2 consists of OSR barge with 76,900 bbl of onboard storage capacity and two (2) high-capacity weir skimmers to relieve the OSR vessel for its transit and offload to the OST. Ten (10) knots is a realistic average transit speed for planning purposes for each of these response vessels and the OST. Transiting at this speed, TF-1 would be positioned to arrive at the spill site within one hr (i.e., would be positioned within 10 n mi of the drillship). TF-2 will be approximately 25 n mi of the drillship and available to assist TF-1 at Hour 3. The OST (TF-3) would arrive at the recovery site within 24 hr of departure from its staging area in the Chukchi Sea. The tactics used for the positioning of oil recovery vessels at the blowout site are described in the scenarios (as referenced in Table N.1-2).

The time needed to fill the OSR vessels is estimated by assuming that all of the oil released can be contained and recovered. For planning purposes, the "Time-to-Fill" is based on the largest volume flow rate of oil that could conceivably reach the skimming vessel.

TF-3 (minimum storage capacity of 513,000 bbl) will be located not more than 240 n mi from the drilling location and immediately mobilize in the event of a spill. The tanker would arrive at the blowout and be ready to accept recovered liquids within 24 hours.

For planning purposes, the scenario assumes that 10 percent of the 25,000-bopd discharge escapes the primary offshore recovery efforts at the blowout. This unrecovered 2,500 bopd is assumed to drift toward the mainland, driven by winds out of the WNW. This wind direction was used for planning purposes and does not correspond to the prevailing E, NE, and ENE wind directions of summer months. TF-6, consisting of a large, mobile OSR barge and tug, will be mobilized from its staging location and arrive within 96 hours in the nearshore zone of the Chukchi Sea in order to best intercept and recover oil potentially threatening the coast, as water depth, weather, sea conditions and other circumstances allow. TF-6 would be capable of transit speeds of 5 knots, ensuring arrival by Hour 96. In the unlikely event strong, sustained winds develop out of the WNW, trajectory modeling estimates that six days is the earliest possible time oil could reach shore, even if no containment and recovery operations were conducted. From this location, it can be mobilized into the nearshore zone well ahead of the predicted timeframe that oil would reach shorelines for oil recovery and support of the shoreline protection task force. TF-6 would be dispatched as needed to intercept the oil as described in the scenario. It is

assumed that half of the oil reaching the nearshore environment is recovered by the skimming systems dispatched from the TF-6. The remaining 1,250 bopd are assumed to migrate toward the shoreline where Shell would mobilize personnel and equipment to intercept the oil and deploy boom for shoreline protection. TF-6 possesses 18,636 bbl of fluid storage capacity for oil recovered from the nearshore operations. For planning purposes, 17,000 bbl is used as the nominal capacity of the Nearshore OSR barge for recovered fluids.

Shoreline recovery operations are staffed by Shell OSRO and response contract personnel (ACS, ARS, AES-RO supplemented with NSSRT, ACRT, and VRT responders) as needed. Shoreline protection and recovery task forces set up and maintain multiple teams along the shoreline to recover oil. For planning purposes, each task force maintains a minimum of six teams that deploy boom to intercept oil moving along the shoreline, a small skimmer, and Fastanks or bladders set up on the beach to hold the recovered liquids or oily waste and debris. The shoreline response teams have access to numerous storage containers (e.g., Fastanks) for oily waste storage along the shoreline. Additional temporary storage will be provided as needed using lined pits, drums, bladders and other storage containers flown in by helicopter or transported to the areas of need with landing craft. Authorization would be sought for the burning of oily solids (e.g., wood, vegetation and other combustible materials) at approved onshore burn sites after careful assessment of the risks and benefits of various controlled burns.

N.3 SURFACE CONTROL AND SUBSEA CAPPING AND CONTAINMENT CAPABILITY

N.3.1 Introduction

Shell has taken significant precautions to minimize the potential for a loss of well control. Section N.4.1.8 (under “Drilling Assurance”) describes the four layers of preventive and recovery measures used to minimize spill potential during drilling operations. Layer I consists of proper well pre-planning, risk identification, personnel training, and routine tests and drills on the drillship. Layer II includes early kick detection, implementation of kick response procedures and continuous monitoring of downhole conditions. Layer III involves the use of mechanical barriers, such as the BOP, casing, and cement. Layer IV represents dynamic techniques to regain well control, including relief well drilling.

In the unlikely event that well control is lost despite these precautions, Shell will immediately mobilize emergency response personnel and equipment. Shell will also consult a well control specialist such as Wild Well Control, Inc. (Wild Well Control) for the intervention and resolution of a well control emergency.

N.3.2 Surface Control Options

If well control is lost, every effort will be made to regain well control using dynamic surface control measures. Historically, these measures of regaining control have been rapid and effective. Refer to Section N.4 of this Appendix (Prevention Plan) for a more detailed discussion on well control options and methods.

In the event of uncontrolled flow, safety procedures are employed to protect personnel, the environment, and equipment. A site assessment is conducted, safe access and work plans are created, and uncontrolled fluids are diverted for collection to create a safe working environment and to minimize pollution.

Although the specific control methods used will depend on the situation, potential control methods include the following:

- Natural bridging;
- Pumping mud, plugging material, and/or cement down the well to kill it;
- Replacing the failed equipment if control was lost due to equipment failure; and
- Application of BOP.

N.3.3 Subsea Capping and Subsea Containment Capability

Containment capability, in the unlikely event of a loss of well control, would be provided by a combination of subsea capping, subsea containment and surface separation equipment installed on a containment vessel.

Surface intervention involves work performed on the wellhead of a subsea well. Surface intervention in the OCS involves subsea devices used on the top of the well or some device connected thereto (e.g., the BOP stack or wellhead).

A set of subsea devices would be assembled to provide direct surface intervention capability with the following priorities:

1. Attaching a device or series of devices to the well to affect a seal capable of withstanding the MAWP and closing the assembly to completely seal the well against further flows (commonly called “capping and killing”).
2. Attaching a device or series of devices to the well and diverting flow to surface vessel(s) equipped for separation and disposal of hydrocarbons (commonly called “capping and diverting”).

These devices form what is generally known as a capping stack. The devices include: ram-type BOP bodies equipped with blind and/or pipe rams, spacer spools, flow crosses (or mud crosses for pumping kill weight fluid into the well or for flowing the well in a controlled manner through piping to the surface) and connectors to attach to the upper H4 connector mandrel. This equipment will be ready for use and stored onboard a designated vessel in Alaska. It is anticipated that surface intervention efforts will successfully stop the flow from a blowout in less time than is required to drill a relief well. Appendix A provides additional information regarding the capping stack application.

Should capping fail to completely stop oil leaking from the well, one or more subsea devices will be deployed to capture low-flow rate leaks. Oil and associated gas collected from these devices would be piped to separation equipment on the containment vessel. The separation equipment includes a series of gas/water and oil/water separators, knock-out drums pumps and pre-heaters. Gas would be diverted to a flare and the oil would be disposed of either by storing and shipping from the scene or incinerating in a flare. By capturing the oil below the water surface, interference by surface environmental conditions, including inclement weather or ice, is avoided and surface oil spill recovery efforts are simplified. Surface oil spill response equipment will remain on station in the immediate area to capture any fugitive oil that escapes the subsea collection dome(s).

All of the separation equipment on the containment vessel will be designed for conditions in the Arctic including ice and cold temperatures. This equipment will also be designed for reliability, ease of operation, flexibility and robustness so it could be used for a variety of emergency

situations. Capping stacks, subsea collection devices, separation equipment and the containment vessel have been tested. The capping system, containment system and the associated processing equipment is being designed and assembled to accommodate the WCD oil and gas volumes expected from wells in this region. The capping system, sub-surface containment system and the barge containing the processing equipment will be installed on fleet vessels and located as described in the revised Chukchi Sea EP.

N.4 PREVENTION PLAN [18 AAC 75.425(e)(2)]

N.4.1 Prevention, Inspection, and Maintenance Programs [18 AAC 75.425(e)(2)(A)]

N.4.1.1 Prevention Training Programs [18 AAC 75.020]

Personnel involved in spill response or cleanup activities are thoroughly trained and are expected to be knowledgeable of safety, health, and environmental requirements, so they fully understand the safety and health risks associated with their job, and the practices and procedures required to control their exposure to potential safety and health hazards. The level of training is based upon the duties and functions of each responder in the emergency response, and complies with the regulatory requirements for employee training. See Appendix F (Training and Drill Information) for additional training information.

Site personnel who are expected to participate in OSR activities will require training in a number of other subjects, including:

- HAZWOPER 24-hour;
- Shell OSRP Overview;
- Oil Spill Response Equipment Overview and Oil Spill Response System Performance; and
- Specialized training as needed for oil spill response boat operations, lightering, spill containment and recovery, and ISB operations.

In addition, selected site personnel shall be fully aware of waste issues involving on-site generation, storage, segregation, manifesting, and transportation. They must be knowledgeable of exempt vs. non-exempt, and hazardous vs. non-hazardous materials, and the associated practices in managing the material in accordance with standard operating procedures.

Shell Drill Foreman and Contractor Toolpushers, Drillers, and Assistant Drillers are required to have formal well control training in accordance with 30 CFR 250 Subpart O requirements for well control and production safety training. In addition, BSEE requires weekly pit- and trip-drill exercises designed to keep drill crew personnel alert to well control contingencies. The BOP is regularly pressure- and function-tested, again under BSEE requirements, and flow-chart response plans are kept visible on the drill floor as decision aids to the driller should a well flow event occur.

N.4.1.2 Substance Abuse Programs [18 AAC 75.007(e)]

The Shell drug policy is established to ensure a safe working environment at all operations. Shell's company-wide policy covers all employees. All contractors and non-employees who work at Shell facilities must also obey this policy. Shell requires joint venture partners under its operational control to apply this policy and uses its influence to promote it in other ventures.

The use, possession, distribution, or being under the influence of illegal drugs or alcohol is strictly prohibited on Shell-controlled premises. Entry onto Shell-controlled premises constitutes consent to and recognition of the right of the Company to conduct random drug testing, as well as drug testing for cause.

Beyond these requirements, operators of designated critical equipment (such as company drivers, crane operators, and work boat operators) are subject to daily alcohol testing.

Failure to cooperate, or repeated positive test results will result in termination for Shell personnel, and removal from Company premises for all others.

N.4.1.3 Medical Monitoring [18 AAC 75.007(e)]

Shell has a systematic approach to medical monitoring designed to pursue Shell's international goal of safe working conditions and continuous performance improvement. Shell employees and contractor employees are required to have medical evaluations for FTW, based on job classification and responsibilities, as outlined in the Shell Exploration and Production Company's FTW policy.

Shell employees receive medical evaluations at the onset of employment and periodically as specified in the FTW policy. Contract employees who perform drilling, navigational towline, security, maintenance, fuel transfer or response duties are required to have a medical evaluation of FTW based upon their job responsibilities. Where a Shell protocol exists for a specific job or task, at a minimum the protocol shall be included in the contractor's medical evaluation for FTW. In addition, employees shall be included in applicable medical surveillance programs.

N.4.1.4 Security Program [18 AAC 75.007(f)]

The primary safety and security concern relates to the transportation of Shell and contractor personnel via the Shell Logistical Support Base facility or other company-established logistical base. Security services may be provided through coded badges or a professional security company for Shell's Logistical Support Base and other support facilities.

Access to the drillship is either by helicopter or by vessel. Personnel will be primarily transferred to the platform by helicopter, which is strictly controlled at Shell's Logistical Support Base facility and airstrip. Shell anticipates helicopter operations will be conducted from Barrow, and vessel operations will be conducted from Wainwright; each facility will have security controls in place.

Supplies will be loaded onto the drillship and support vessels prior to mobilization, and all OSR equipment will be mobilized directly to the Chukchi Sea onboard the OSR task forces. Transport of any remaining supplies during the drilling season is expected to be minimal, mainly related to transfers of spare parts, drilling tools, and other unforeseen items which can be transported from Shell's Logistical Support Base to the drilling location by helicopter (or vessel, if weather conditions preclude helicopter operations).

In the event of an actual spill, vessels and aircraft may be used for supplemental transportation of equipment, personnel, and supplies in support of Shell's shoreline recovery effort and, in all likelihood, temporary camps would be mobilized to suitable areas and communities adjacent to the shoreline recovery effort.

Access to the drilling sites themselves will be very limited, given that they are in remote, offshore locations and subject to authorization by the on-site Drill Foreman who strictly controls

transit and access to the drilling site. For safety reasons, access to the drillship will be limited to authorized personnel only.

For further information regarding on-site security and regulations, see the Security Plan for the respective drillship.

N.4.1.5 Fuel Transfer Procedures [18 AAC 75.025]

At exploration sites, the following types of fuel transfers will be conducted:

- Fuel transfers to or from the drillship, including transfers from the drillship to other supporting vessels (e.g., anchor handler) or helicopters.
- Fuel transfers to or from the OSR vessel, including transfers from these vessels to other supporting vessels such as work boats.

Fuel Transfer Procedures for the OSR vessel and for the *Discoverer* are in Appendix M (USCG Supplement).

The drillship *Discoverer* incorporates fuel transfer facilities for helicopter support, fuel barge, and other support vessels.

Fuel transfers will be performed in accordance with:

- Lease-specific requirements including the pre-deployment of booming;
- USCG regulations [33 CFR 154.1035(b)(2)(i)] and vessel response plans; and
- ADEC regulations 18 AAC 75.025.

Drillship specific procedures governing fuel transfers, including emergency shutdown, will be strictly followed by marine personnel. The procedure manuals will be onboard the drillship. If a spill of any size is detected, immediate action will be taken to stop the source, prevent any spill going overboard, and initiate containment and recovery actions. The drillship has shipboard oil pollution emergency plans that personnel adhere to, including immediate contact of the supervisor and reporting to the appropriate authorities.

Drillship Internal Fuel Transfers

Internal fuel transfers include flow of fuel from the onboard storage tanks to settling tanks, or to loading stations on deck. Onboard storage tanks will include:

- cold-start compressor,
- emergency generator day tank,
- incinerator day tank,
- deck cranes,
- crude oil tank, and
- mud pits.

The emergency generator day tank and the incinerator day tank are fitted with overflow pipes that return excess fuel back to the inner hull storage tanks. These transfers generally will occur twice daily, once per shift, and are performed by marine personnel. Safety procedures include adherence to an internal fuel transfer checklist, direct communication among personnel, and visual inspection of the transfers. No internal fuel transfers will be conducted during high-risk situations such as bad weather or alarm status.

If an alarm occurs, an emergency shutdown system at the pumps will close any valve in use and stop the transfer to avoid spill overflow.

Helicopter Fuel Transfer

Helicopter fuel transfers include storage, filtering, and transfer of fuel from the fuel pods located on the drillship deck through pumps and filters to the delivery skid on the heli-deck. Emergency shutdown controls are located at the heli-deck and the forward port exit ladder from the heli-deck. Preventive measures for fuel transfer to the helicopters include:

- Ensuring no helicopters are inbound/outbound;
- Discontinuing hot work on the heli-deck and starboard decks;
- Verifying operative firefighting system including extinguisher on the heli-pad;
- Proper alignment of fueling facilities (including valves, motor, pump, and coalescing filter); and
- Electrical bonding or grounding of the helicopter to the vessel.

Only authorized personnel (either the Helicopter Landing Officer or one of three heli-deck crew members) will activate this system.

Drillship Fuel Transfers

No fuel transfers will occur during emergency weather conditions or alarms without the direct approval of the OIM. Safety of diesel fuel transfer to the drillship will rely on direct communication between drillship and fuel supply vessel personnel responsible for the transfer procedures. Preventive measures for ensuring safe transfer will rely on pre-transfer procedures. Prior to transfer, the fuel-handling personnel will identify:

- Product, rate of transfer, and sequence of operations;
- Critical stages of the transfer operation;
- Applicable federal, state, and local regulations; and
- Emergency procedures including shutdown operations.

Refer to Appendix M (USCG Supplement) for the fuel transfer procedures for the drillship.

Fuel transfers will include the use of pre-deployed boom, visual inspection, and open communication between the personnel of the fueling facility and the drillship personnel. Continuous communication is the best preventive measure for avoiding an emergency situation. If radios are used for communication, they will be tested and ensured to be intrinsically safe as required by 46 CFR 110.15 through 46 CFR 110.100 and 46 CFR 11.80.

Once a fuel transfer is complete, fill valves will be closed and visual inspection of valves, flanges, pumps, and connection facilities will be conducted to ensure there is no discharge.

Fuel Transfer

In normal operation, the fuel transport vessel will receive diesel fuel delivered from a drilling support vessel or third-party fuel barge. The vessel may also serve as a fuel lightering vessel transporting fuel from a drilling support vessel or third-party barge to the drillship. In both cases, the fuel transfer procedures will be based on the more stringent of either the vessel's own procedures (as part of the USCG-approved Vessel Response Plan submitted by each vessel owner) or the similar procedures in place at the drillship.

Refer to Appendix M (USCG Supplement) for the fuel transfer procedures to be implemented by the fuel transport vessel.

The fuel transport vessel may also at times be used to provide diesel bunkering for OSR-related work boats (34-foot work boats), in which case the transfer would always be conducted under the fuel transfer procedures in Appendix M (USCG Supplement).

In the event that any oil spill response-related work boats or support vessels have fuel delivered to them by a third-party fuel barge, the transfer would be conducted in accordance with the fueling procedure established by Shell.

Where required as part of an approved Vessel Response Plan, or as required under the lease stipulations, fuel transfers will include the use of pre-deployed boom, visual inspection, and communication among the vessel personnel as the best preventative measures.

N.4.1.6 Maintenance Programs

Operations of the *Discoverer* drillship include routine internal inspections and maintenance. Maintenance is an important tool for spill prevention because it monitors mechanical integrity and is documented daily by written reports. During the refurbishment phase, maintenance records are kept in log books. Under the operating phase, maintenance is performed according to a computerized maintenance program with records kept in the electronic maintenance database. The mechanical integrity of the drillship is upheld through the planned maintenance program initiated following drilling unit refurbishment.

For malfunctioning or corroded materials, the maintenance department is notified and personnel are assigned the repair task by either the Chief Engineer or the Maintenance Supervisor. Equipment is inspected based on frequency intervals indicated in the maintenance program and in accordance with manufacturer and industry recommendations. For example, cranes are inspected daily per regulatory requirement, while the BOP gantry crane hydraulic system, which receives only sporadic use, is inspected weekly.

N.4.1.7 Operating Requirements for Exploration [18 AAC 75.045]

Drillship Integrity Inspections

During drilling, a visual inspection of major tanks and lines will be conducted daily. Shift inspections are conducted by personnel to detect leakage, damage, or serious deterioration of the storage tanks, fuel lines, piping, and associated facilities. Potential leaks will be properly reported in the daily tour report and the Toolpusher will be notified.

Piping between the storage tanks and boilers or engines is attached to the structure with brackets or double plates that protect the piping from damage. These brackets are visible for regular inspections. Much of the piping is routed by design to be out of the way and protected from impact or the environment.

Preventive measures include floor drains around the drilling deck to stop minor spills from flowing off the deck. Supplemental one-inch drain lips at individual doorways are provided to contain potential spills to a single room. The *Discoverer* floor drains flow to a holding tank. From the holding tank, the spilled liquid is sent through the oil-water separator. After separation, water is routed overboard and contaminants are stored until shipped ashore for proper disposal.

N.4.1.8 Blowout Prevention and Emergency Shutdown [18 AAC 75.425(e)(1)(I)]

Drilling Assurance

Well control is the process of maintaining positive pressures in the drilled wellbore so that pressures in the geologic formations do not cause gas or fluids from the formations to escape in

an uncontrolled manner. This section provides information on the measures taken to maintain well control and prevent a blowout during drilling operations. Recovery measures used to regain well control in the event of lost control are discussed in Section N.3. The potential for discharge is discussed in Section N.4.3.

No failure of a single barrier or a barrier element, whether caused by operational error or equipment failure, should lead to loss of well control. Therefore, Shell applies the following series of layers of prevention and response to well control issues:

- Layer I includes proper well planning, risk identification, training, routine tests and practice drills on the drillship which build a strong prevention and response foundation. Examples of Layer I would include BOP tests, pit drills, and trip drills.
- Layer II includes early kick detection and timely implementation of kick response procedures. Continuous monitoring including the use of Shell's RTOC (see subsection below on Well Control During Drilling) provides early kick detection. When a kick is detected, the general response is to immediately shut down the pumps, perform a flow check, shut in the well, and kill the well.
- Layer III involves the use of mechanical barriers, including, but not limited to, BOP, casing, and cement. Testing and inspections are performed to ensure integrity is maintained at all times.
- Layer IV represents relief well drilling, which would be implemented if a blowout were to occur, despite the first three layers of protection. Contingency plans include dynamic surface control measures and the methods for drilling a relief well.

Well Control During Planning and Preparation

The primary methods of well control are properly designed casing/cementing programs to isolate and structurally support downhole formations, and maintenance of drilling fluids of sufficient volume and density in the wellbore to counteract any experienced geologic pressures. Data from previous wells in the area have been used to anticipate formation pressures that might be experienced when drilling the planned wells and the wells have been designed to handle the expected pressures. See Figure N.4-1 for an example of this process.

The primary causes of loss of well control are insufficient fluid density, fluid losses to the formation, swabbing, not keeping the wellbore full of drilling mud, charged formations, rapidly drilling a gas sand, and dissolution of shallow gas hydrates. Loss of well control, an uncontrolled influx of formation fluids into the wellbore, is primarily prevented by properly designed casing strings and drilling fluid systems.

Shell's approach to reducing the risk of a well control incident includes proactive measures to maintain well control. This starts with the following key safeguards during well planning and preparation:

- Training key drillship site personnel;
- Risk identification and mitigation, including writing Shell's DWOP exercise;
- Contingency planning, including operation-specific plans to mitigate all of the potential causes of loss of well control; and
- Flexible well design to accommodate a range of uncertainty in subsurface data.


The following training and drills support the proactive approach to well control in the well preparation phase.

- On-site Shell and contractor supervisors maintain current well control certification.
- Prospect-specific well control scenarios and kill techniques are modeled and simulated using Shell's proprietary software and well control simulators at the Robert Training and Conference Center, located in Robert, Louisiana.
- Shell foreman, Shell engineers, contractor supervisors, and contracted drillship skilled positions (e.g., drillers and assistant drillers) are trained for prospect-specific well control situations.
- Weekly pit drills and trip drills.
- Secure well drills performed when applicable.
- Training on the COCP and the associated daily status reporting conducted for appropriate personnel.
- Blowout prevention drills performed on a frequent basis ensure the well can be shut in properly and quickly. BOP service and inspection are performed throughout the drilling and off seasons.

Available data from seismic operations and neighboring exploration wells, such as rock types and subsurface pressure profiles, are interpreted to ensure a design that permits effective control of the well. Drilling engineers predict downhole pressures and interpret existing datasets to design a safe and productive drilling program.

Shell performs a site-specific hazardous operations analysis for each prospect (Figure N.4-1). In addition, Shell conducts a DWOP exercise for each prospect which involves a collaborative effort of drilling engineers, operations and HSSE personnel, as well as service providers, to analyze all phases of the planned drilling program. DWOP is a systematic method to: 1) identify and prioritize a set of actions to optimize the drilling program, considering all areas of activity; 2) identify and prioritize key operational and HSSE risks and associated mitigation opportunities; and then 3) use this information to develop the optimum drilling program. Shallow hazards surveys have also been conducted to assess the shallow areas of the planned wellbore for potential pockets of shallow gas that could result in loss of control.

**Figure N.4-1
 Models for Site-Specific Well Control**

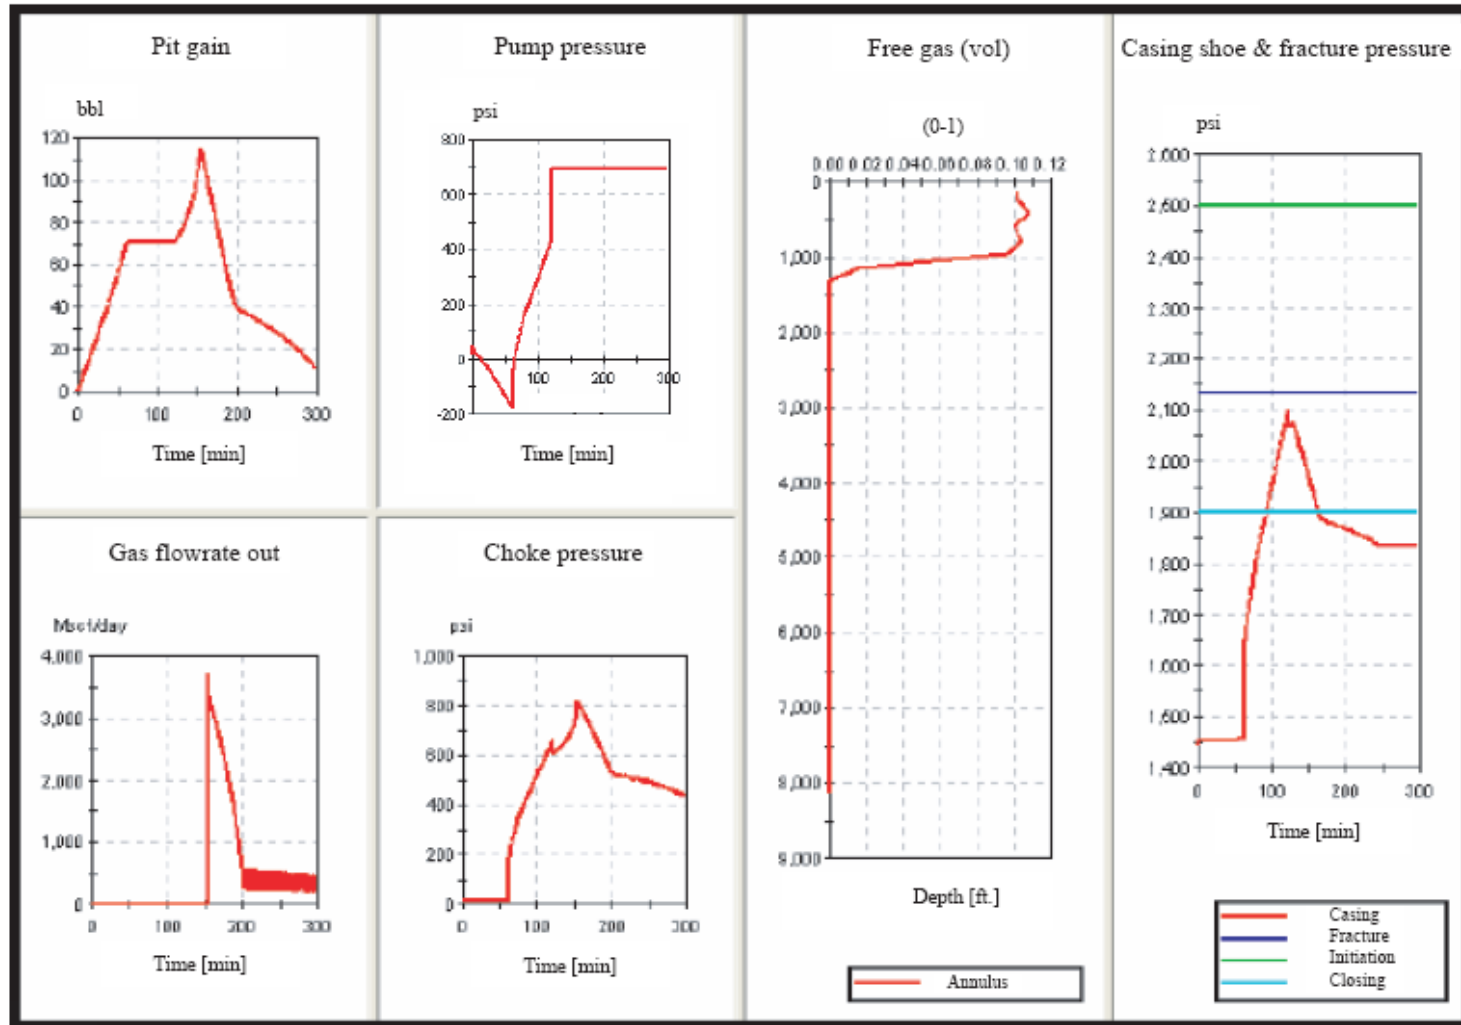

In addition to site-specific hazardous operations analyses and the DWOP exercise for each prospect, the following additional risk identification and mitigation measures would be taken:

- Site-specific well control modeling for anticipated hydrocarbon intervals;
- Site-specific dynamic well control modeling for any prospects with possible shallow gas or hydrate accumulations; and
- Virtual ice management using shipboard marine radar combined with satellite RADARSAT ice imagery to permit advanced and accurate warning of ice hazards.

Well Control During Drilling

General

The primary means of controlling well pressure utilizes hydrostatic pressure exerted by drilling fluid of sufficient density to prevent flow from the formation into the wellbore. The condition of the drilling fluid is continuously monitored using both manual and automated means, and adjusted as necessary to meet the actual wellbore requirements. Monitored parameters include mud weight into and out of the well, mud flow rate into and out of the well, and presence and analysis of any gases in the return mud flow. The majority of those monitoring duties are performed by the staff of the drilling crew. A mud-logging unit, staffed by experienced personnel, will be in continuous use during drilling operations.

Should a kick occur, kick identification and detection, and timely kick management are the primary tools used to prevent a blowout. Latest generation MWD and PWD tools are used, allowing real-time monitoring of downhole pressures and drilling parameters. This allows rapid identification of the onset of abnormal pore pressures, swabbing, or the influx of hydrocarbons near the drilling bit.

The drilling operations are supported by Shell's RTOC, where technical experts in Houston or New Orleans can assist by monitoring on-going operations, analyzing penetrated formations, and analyzing pressure trends. Data can be transferred from the drillship to the RTOC in real-time (see Figure N.4-2). This service augments the mud-logging capabilities at the drillship and allows Shell to easily make available trained and experienced staff to support the drilling operation.

**Figure N.4-2
Real Time Operations Center**



Early kick detection is critical to maintaining well control. The drillers, drill crews, mud engineers, mud loggers, and logging engineers are all trained on kick detection and rapid response procedures. In addition, all drilling breaks are treated as potential kick situations, taking all necessary precautions until the situation has been determined to be stable.

Well Control While Drilling at the Mudline

There is risk for a shallow gas blowout while drilling a hole at the mudline, before the subsea BOP or surface casing have been installed. Large volumes of high-pressure gas can escape from shallow formations, into the wellbore, and then into the water. It should be noted that shallow gas blowouts do not contain oil; therefore, no spill of oil would be expected at the surface. However, such an incident would be critical from a worker safety standpoint. In order to minimize this risk, Shell would conduct a site clearance and shallow hazards survey prior to conducting drilling operations using high resolution profiling systems. This survey would evaluate conditions at and below the seafloor, which could affect the safety of operations including the presence of shallow gas.

If a shallow gas blowout would occur, no attempt would be made to shut in the well to contain the gas because the shallow formations exposed at these depths generally would not have enough strength to control the gas. Instead, the gas would be directed away from the drilling unit floor using a diverter valve and diverter line.

Free gas accumulations in shallow permafrost have been encountered in the course of drilling permafrost intervals. To avoid release of this gas and the potential loss of structural integrity of the wellbore, the drilling fluid is cooled to ensure that the wellbore remains frozen, with the gas trapped, and the integrity of the hole is intact.


Well Control While Drilling Below the Conductor Casing

Each well is drilled according to a detailed location-specific well plan, based on expected downhole conditions at that location. Such plans are part of the first layer of protection, proper planning, and risk identification. Isolating formations with casing and appropriately maintaining

the drilling fluid properties, including density, are critical to preventing loss of well control during drilling.

Once the conductor casing has been set across the shallowest formations, the BOP provides a mechanical barrier to loss of well control, key to the third layer of protection. See Figure N.4-3 for an example of a BOP and Figure N.4-4 for a diagram of the BOP to be used with the *Discoverer* drillship. Although rarely needed, this equipment is available as a back-up means (secondary to the mud system) to secure well pressure. In the unlikely event that primary well control is lost, the BOP can be used to safely halt an uncontrolled flow from the wellbore.

**Figure N.4-3
Example of a BOP**

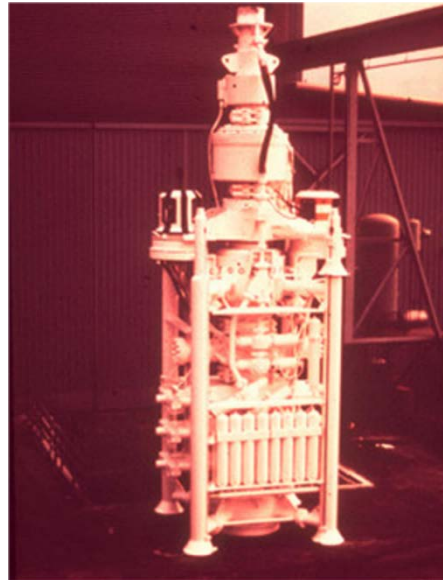


In the event the well kicks, the BOP will be immediately used to shut in the well and confine the pressure within a closed system. The casing program will be designed so that any anticipated formation pressure can be shut-in at the subsea BOP without rupturing the casing. Shell representatives assigned to the drilling unit have BSEE-approved blowout prevention training and actual experience in controlling and killing kicks. Training of this nature is a continual program with Shell. Drilling crews will be trained to a standard sufficient to satisfy both BSEE and Shell.

The BOP for the *Discoverer* consists of:

- Four 18 ¾-inch 10,000 psi WP, ram-type preventers (Cameron).
- Two 18 ¾-inch 5,000 psi annular preventers (Hydril).
- 2 ¾-inch (ID) 10,000 psi choke and kill lines.

For a diagram of the BOP for the *Discoverer*, refer to Figure N.4-4.

Figure N.4-4
Discoverer Drillship Blowout Prevention Equipment System

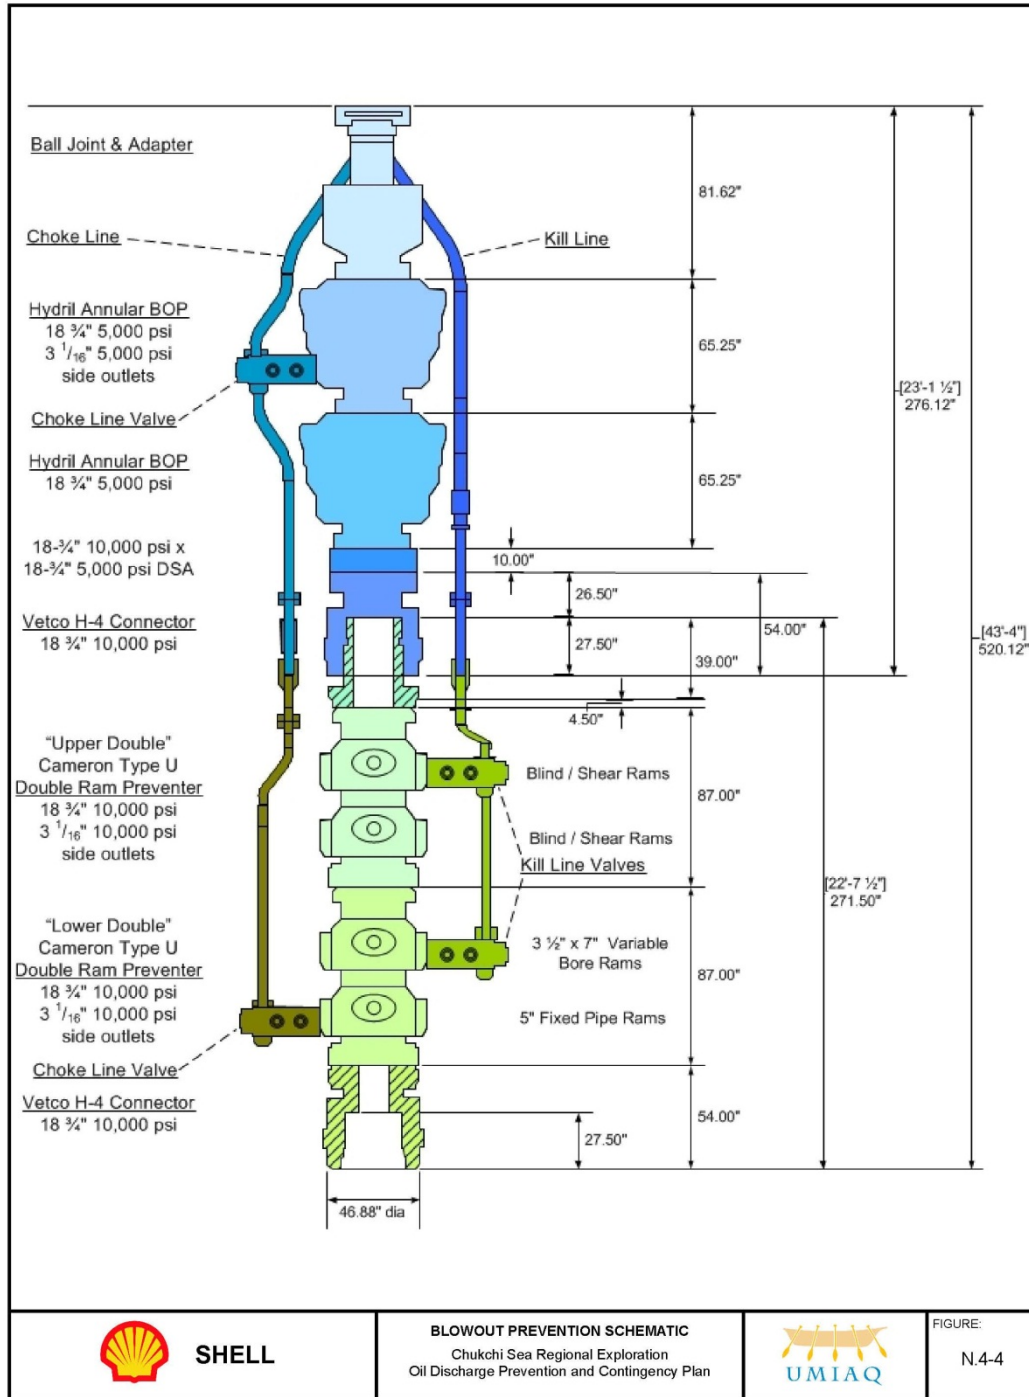

SHELL

BLOWOUT PREVENTION SCHEMATIC
Chukchi Sea Regional Exploration
Oil Discharge Prevention and Contingency Plan



FIGURE:

N.4-4

Date: 4/19/2011

UMQ: 14000311_Shell_CC_Blowout_Prevention_v002

After installation, the BOP will be tested in accordance with BSEE and Shell specifications. Tests will be conducted at least weekly and prior to drilling out casing.

Well Suspension or Abandonment

Upon completion of drilling operations, the well will be properly plugged and abandoned following BSEE requirements. Procedures include setting cement across hydrocarbon intervals. All plug and abandonment operations will be conducted per 30 CFR 250 Subpart D and with prior approval from BSEE.

Spill Prevention Practices and Training

Blowout prevention drills are performed on a frequent basis to ensure the well is shut-in properly and quickly. Blowout prevention testing intervals are within the standard of BSEE regulations. Blowout preventers will be pressure-tested every 14 days and function-tested every seven days. In addition, drilling personnel are BSEE-certified in well control, and weekly pit/trip drills will be conducted.

N.4.1.9 Oil Storage Tanks [18 AAC 75.065]

Part 1 of this OSRP contains information about the major tank facilities on the drillship. During drilling, a visual inspection and soundings of the major tanks will be conducted at least once daily for leakage or damage detection, and to identify any questionable mechanical integrity of the storage tanks and their associated fuel lines, piping, and valves. Leak detection will be recorded in a daily tour report and the OIM in charge of the drillship will be notified in order to ensure that repairs are completed safely and in a timely manner.

Inspections of Elevated and Portable Tanks [18 AAC 75.065(a)]

The storage tanks to be used in Shell exploration are integral parts of the *Discoverer* which will undertake the drilling program. The *Discoverer* will not carry any non-integral bulk storage oil tanks equal to or greater than 10,000 gal, which are regulated under 18 AAC 75.065.

Inspection Records [18 AAC 75.065(d)]

Inspection records are maintained by the drillship contractor.

Repair or Alteration [18 AAC 75.065(e)]

Shell will notify BSEE of any major repair or alteration.

Leak Detection [18 AAC 75.065(h)(1)]

See Section N.4.5.

Overfill Prevention [18 AAC 75.065(j), (k)]

Overfill protection is primarily through visual observation and mechanical and remote soundings during transfer operations. Containment save-all is in place around the fuel tank vent outlet.

The *Discoverer* fuel tanks are integral to the vessel's hull. Therefore, all loading stations and vents are provided with save-alls or high coamings as per the requirements of SOLAS, MARPOL, and DNV requirements.

Bulk oil storage tanks located on the drillship will be lined with appropriate impermeable liners. Tanks will be visually inspected daily for the presence of oil leaks or spills.

Debris Removal [18 AAC 75.075 (c)]

The tank areas will be maintained free of debris and other material that might interfere with the effectiveness of the system.

Drainage [18 AAC 75.075(d)]

Drill floor drainage will be routed to an oil-water separation tank. The *Discoverer* is equipped with two oil-water separators for handling bilge and waste oil. The separation process will be inspected to ensure that separated oily water may safely be disposed. The deck is furnished with scuppers that can be plugged to manage deck drainage.

N.4.1.10 Emergency Tow and Escort Vessels Program

The drillship will have two dedicated ice-class vessels assigned for the purposes of anchor handling and ice management (see Appendix A – Response Equipment). These two dedicated vessels are the primary escort and emergency vessels for the drillship.

N.4.2 Discharge History (>55 Gal) [18 AAC 75.425(e)(2)(B)]

Not applicable.

N.4.3 Analysis of Potential Discharges [18 AAC 75.425(e)(2)(C)]

This section contains a summary of potential discharges and their impact. The spill history of previous exploration drilling in the Chukchi Sea demonstrates the low probability of an event causing oil to enter into an open water environment. Table N.4-1 summarizes maximum discharges of liquid hydrocarbons that potentially could occur from various sources.

A response scenario addresses the potential immediate release of crude oil to the environment by a loss of well control during drilling operations in conditions typically encountered during the drilling season. The probability of a major oil spill occurring during drilling operations is extremely low. Comprehensive flow histories are generally not available for exploration areas. For planning purposes, the flow rate from a blowout is 25,000 bopd for the duration of the event.

N.4.3.1 Potential Areas for Discharge

Fuel Transfers

A potential source of discharge occurs during fuel transfers of any kind. This discharge is minimized by the weather restrictions of transfer procedures, which prevent transfers during unfavorable wind or sea conditions. Transfers are announced in advance and verbal communication, in combination with visual inspection, is the best method of discharge detection.

If discharge is detected, the fuel would most likely be contained immediately on deck. If fuel overflow of the containment dikes occurs, edge coaming would prevent flow of fuel off the vessel into open water.

**Table N.4-1
Summary of Potential Discharges**

TYPE	CAUSE	PRODUCT	SIZE	DURATION	ACTIONS TAKEN TO PREVENT POTENTIAL DISCHARGE
Transfer from fuel barge to drillship	Hose rupture	Diesel	Approximately 48 bbl (2,000 gal) (Appendix M – USCG Supplement)	5.5 min (Appendix M – USCG Supplement)	Transfer procedures in place; Note: This scenario will be addressed as part of USCG approval of Vessel Response Plans by individual vessel owners.
Diesel	Tank rupture	Diesel	1,555 bbl	Minutes to hours	Note: The diesel tanks are internal to the drillship rather than deck-mounted, where the potential for marine spills is much greater. As a result, a scenario involving tank rupture has not been included in the oil spill response plan, but will be monitored as part of an ongoing tank inspection program.
Blowout	Uncontrolled flow at the mudline	Crude oil	750,000 bbl	30 days (Appendix C – WCD Scenario)	BOP and related procedures for well control.

Blowouts

Since 1940, oil and gas exploration and production have been conducted in federal waters. Given the use of modern prevention and control techniques, actual blowouts are extremely rare and of relatively short duration. Often used interchangeably, the term “blowout” is also known as a “loss of well control,” and often does not result in a release to water. As currently defined by BSEE, loss of well control includes:

- Uncontrolled flow of formation or other fluids. The flow may be to an exposed formation (an underground blowout) or at the surface (a surface blowout).
- Flow through a diverter.
- Uncontrolled flow resulting from a failure of surface equipment or procedures.

From 1971 to 2005, 276 exploration and development well blowouts occurred on the OCS while drilling approximately 34,000 wells. Thirty-three of those 276 blowouts resulted in oil spills of crude or condensate with the amount of oil spilled ranging from <1 bbl to 350 bbl. The total volume spilled from those 33 blowouts is approximately 1,600 bbl.

Table N.4-2 provides a summary of the potential discharge volumes associated with exploration and production plans that were proposed in Alaska’s OCS and state waters since 1997. This summary includes the maximum potential spill volumes for either well blowouts or other WCDs. Although unlikely to occur, Shell has developed strategies to respond to a WCD of an uncontrolled release of oil during a blowout or any other spill. These strategies are discussed in Appendix C (WCD Scenario), and Sections N.1 and N.2 of this Appendix.

**Table N.4-2
Potential Discharge for Alaska Offshore Drilling (1997 to 2003)**

PLAN NAME	PRODUCTION OR EXPLORATION	OPERATOR	18 AAC 75.425(e)(1)(f) SCENARIO WELL BLOWOUT WORST CASE DISCHARGE VOLUME (bbl/day)	18 AAC 75.425(e)(2)(C) POTENTIAL DISCHARGE ANALYSIS BLOWOUT VOLUME (bbl/day)	BSEE WORST CASE DISCHARGE VOLUME (bbl/day)
McCovey Exploration	Exploration	AEC Oil & Gas, Inc.	5,500 (March 2002)	5,500 (March 2002)	5,500 (March (2002)
Warthog #1	Exploration	ARCO	5,500 (August 1997)	5,500 (August 1997)	5,500 (August 1997)
Northstar Operations	Production	BPXA BP Exploration (Alaska) Inc. (BPXA)	7,220 (May 2003)	10,000 (July 2005)	8,872 (January 2005)
Milne Point Unit (F Pad)	Production	BPXA	2,000 (June 2002)	142,800 gpd = 3,400 bbl/day (March 2003)	N/A
Greater Prudhoe Bay	Exploration	BPXA	3,000 (September 2006)	6,005 (September 2003)	2,000 (September 2003)
Endicott	Production	BPXA	2,000 (December 2003)	2,250 (December 2003)	2,000 (December 2003)
Badami	Production	BXAP	1,100 (May 2005)	1,045 (May 2005)	N/A
Alpine Dev. Participating Area	Production	ConocoPhillips Alaska, Inc. (CPAI)	7,500 (January 2004)	7,500 (August 2004)	N/A
Thomson Gas Cycling	Exploration	ExxonMobil	517 (May 2003)	517 bbl/day (May 2003)	N/A
Kuparuk Field	Production	Phillips 66	1,000 (March 2003)	N/A	N/A
Cook Inlet Area Exploration Program	Exploration	Phillips 66	1,500 (July 2001)	5,500 (February 2001)	N/A
Tyonek Platform	Exploration	Phillips 66	5,500 (September 1998)	5,500 (September 1998)	5,500 (April 1998)
North Slope Exploration Program	Exploration	Pioneer Natural Resources	5,500 (September 2005)	5,500 (September 2005)	N/A
Kitchen Prospect	Exploration	Escopeta Oil	4,675 (June 2006)	4,353 (June 2006)	4,675 (June 2006)
Cook Inlet Production Facilities	Production/Exploration	Unocal 76	300 (December 2006)	1,200 (December 2006)	300 (December 2006)
Oil & Gas Production Operations	Production	Kerr-McGee	1,000 (September 2005)	N/A	1,000 (April 2006)
Northwest Milne Point Exploration Operations	Exploration	Kerr-McGee	5,500 (January 2004)	5,500 (January 2004)	5,500 (January 2004)
Oooguruk Development Project	Exploration	Pioneer Natural Resources Alaska Inc.	2,500 (April 2006)	2,500 (April 2006)	2,500 (April 2006)
Cook Inlet Area Production Operations	Production/Exploration	Forest Oil Corporation	1,500 (February 2002)	1,500 (August 2004)	1,500 (January 2002)

N.4.4 Operational Conditions Increasing Risk of Discharge [18 AAC 75.425(e)(2)(D)]

Severe weather and ice conditions are the primary factors most likely to curtail operations and increase the potential for accidental discharge (See Appendix H – Response Operating Conditions and Limitations). Drilling operations will be conducted utilizing key precautionary measures documented in the COCP to minimize both the likelihood and consequence of an oil spill incident from offshore drilling in the Chukchi Sea. Conditions specific to Shell's Chukchi Sea operations that potentially elevate the risk of discharge, and actions taken to eliminate or minimize identified risks, are summarized below:

- **Temperature:** Cold temperatures pose a threat to personnel and equipment. Excessive heat may cause gases to expand and increase the likelihood of discharge. Drilling operations conducted in the Arctic are exposed to arctic air masses with relatively harsh temperatures throughout the year.
- **Weather Conditions:** The operation most likely to be affected by adverse weather conditions is the drilling support operation, such as transportation activities between the drill site and staging areas. Strict adherence to air safety will be enforced.
- **Sabotage or Vandalism:** Potential for any sabotage or vandalism is minimal. Security and special-interest training by Shell and its contractors should deter any damage from these acts at any of the drill sites. Air safety is essential.

These characteristics can affect the movement of discharge as well as deployment of equipment and efforts to contain and recover the oil.

N.4.4.1 Severe Weather

In general, meteorological and oceanographic conditions at the project location are moderate during the summer months (Appendix H – Response Operating Conditions and Limitations). Winds are predominately from the ENE June through November with occasional low-pressure systems moving into the area from the western Pacific through the Bering Strait bringing warm air and moisture. Wet conditions producing fog and rain can result in periods of low visibility on the open ocean. Storms are more common during the winter months than the summer. The frequency of storms and associated high winds increase with the transition of open water season into the fall freezeup time frame. Severe storms generally originate from the southwest, progress swiftly into the area, and last a relatively short time, although rough weather will on occasion persist for many days.

Environmental parameters such as wind speed and wave height do not directly influence drilling operations. Rather it is the drilling unit's response to environmental conditions, coupled with the drill crew's ability to handle equipment safely, that affects curtailment of critical operations. Conditions of curtailment due to heavy weather are therefore determined in accordance with the drillship's responses to heave, pitch, roll, horizontal displacement, and anchor tension as a function of the corresponding environmental parameters.

Because heavy weather will clearly influence vessel response, environmental conditions will be regularly monitored at the drillship and regional wind and wave forecasts will be received on each drilling unit two times a day with two updates between each forecast. Meteorologists with the weather forecasting service will provide weather consultation services on a 24 hours per day.

Shell has developed a COCP, which has procedures to aid operations personnel in determining the correct procedures to follow when storm conditions are anticipated. Implementing the procedures will ensure the safety of any personnel onboard, minimize the risk of damage to

equipment, and minimize the chance of a discharge attributable to the severe weather conditions (see Section N.4.4.4 below for more information on the COCP).

Once on location, the drillship and key personnel monitor weather conditions continually using a variety of data including aerial ice reconnaissance, third-party forecasts from weather services, and onboard weather surveillance and motion monitoring. Critical operations will be managed in accordance with the COCP, which prescribes allowable operating parameters based upon the “T-time” value. T-time is defined as the estimated (total) time to secure the well and leave the location. The T-time value is updated at least daily by operations and marine personnel. The value is based upon the time required to trip or recover the drillpipe and associated equipment and complete the operations required to leave the well in a secured state. In heavy weather conditions, when vessel heave and horizontal displacement exceed pre-set levels, drilling operations cease, the drill string is pulled into the protective casing of the well, the drillpipe is hung off the blowout prevention stack, and the drilling unit crew prepares to recover anchoring equipment. If weather and sea conditions continue to deteriorate, the lower marine riser package is disconnected and anchoring equipment is recovered (or released if necessary). If weather severity reaches specified levels, the drillship moves off location and is positioned to ride out the storm.

N.4.4.2 Ice Conditions

On-site project activities will begin after July 1. The retreat of the ice typically occurs in most years from early June to late July. The duration of open water ($\leq 1/10$ ice concentration) in the central Chukchi Sea has lengthened by up to four weeks over the past 30 years to a summer average of 17 weeks. However, the range of open water is variable from year to year and ice could be present at the drill site. An IMP is in place to ensure safe operations at all times. Exploration drilling will not be conducted after October 31. Other project activities may continue until the onset of freezeup, which historically varies from late October to late November.

Shell’s ice management system combines ice monitoring and forecasting techniques, along with icebreaking operations. Ice monitoring techniques include satellite-based SAR, airborne and icebreaker reconnaissance, ice forecasting, and weather forecasting. Forecasting incorporates data from the federal services of Canadian Ice Service and NOAA. Shell also intends to use specialized software to integrate ice speed and direction data from vessel radar, aerial reconnaissance, and satellite imagery to predict individual ice floe movement; therefore, allowing modification of icebreaking operations on a real-time basis. Shell’s ice management team at Shell’s Bellaire Technical Center will be fully engaged to support the collection and use of ice-related information.

Two ice management vessels will accompany the drillship (Section N.4.1.10). Typically, one ice management vessel may deflect or break up large ice floes farther away by circling updrift or upwind (“upstream”) in the flowing sea ice, while the other protects the drillship by further breaking closer ice floes into smaller pieces so that the drillship is able to maintain position.

Shell has developed two sets of protocols for responding to potentially hazardous ice conditions: one set of protocols for typical summer drilling when ice driven by wind and currents can move into the area; and another set of protocols to address winter freezeup conditions. These two sets of procedures utilize T-time estimates for establishing alert stages and associated operational and communication protocols.

In general, drilling operations will cease and preparations will be made to disconnect drillpipe when hazardous ice conditions are anticipated within the T-time plus four hours. If the ice management strategy is not capable of preventing a large ice floe from impacting the drillship or reducing ice buildup, then the drillship begins preparing in stages to secure the well and disconnect from the lower marine riser package, recover anchoring equipment, and vacate the drilling location.

The Ice Alert Procedures spell out specific responsibilities for personnel onboard the drillship and onboard support vessels. The conditions necessary to achieve a given alert level are described, along with the corresponding tasks for each of the key individuals assigned to Drilling Operations, Marine Operations, and Helicopter Support Base Operations. The conditions for each alert level relates to a time value “T” which is defined as “the time required for safely and efficiently stopping current operations so that the riser can be disconnected and the anchors retrieved or disconnected to move off location.” All estimates of operational closure time include safety margins that guarantee that the well will be completely secured in the best possible way by the end of the period, “T.”

N.4.4.3 Structural Icing

Meteorological data for the project area indicate that structural icing may occur as early as September (Appendix H – Response Operating Conditions and Limitations). The severity of icing conditions is a function of surface water temperature, air temperature, and wind speed. The occurrence of atmospheric icing due to freezing fogs and snow may also increase the possibility or extent of structural icing. Accumulations of ice on the drillship superstructure will be thickest on windward surfaces between 33 to 164 ft (10 to 50 m) above the water surface. Heavy structural icing will raise the vessel's vertical center of gravity and affect its heeling and righting moments.

The *Discoverer* has been arctic-strengthened and has pre-established ice load limits. If icing on the drillship approaches the allowable amount, raising the allowed vertical center of gravity, critical operations will be curtailed until sufficient ice has been removed and the loading is acceptable. The *Discoverer* incorporates features to minimize the accumulation of spray ice, such as enclosed work spaces and enclosed or heat-traced piping.

When icing conditions exist, crew vigilance will be essential to preventive accumulation. At the start of each tour, crewmembers will inspect their work areas for icing. Roustabouts will remove ice, snow, and standing water from decks, equipment, railings, and the superstructure to prevent ice accumulation in any of these areas. If ice builds up on the derrick it will be removed. Removal onboard the vessel will be accomplished by means of portable heaters, steam hoses, steam lances, wooden ice bats, and picks.

N.4.4.4 Critical Operations and Curtailment Plan

BSEE requires that offshore operators in the Alaska OCS Region develop procedures and maintain an BSEE-approved COCP. The plan deals largely with potential problems associated with severe weather and unexpected levels of ice. The procedures identify ice conditions, weather, and other constraints under which the exploration activities will be either curtailed or stopped. Shell's COCP provides a series of procedures for monitoring and responding to various ice conditions and weather/wave conditions at the drill sites. The focus of the COCP is to prevent personnel injury, equipment damage, and any accidental discharges to the environment. The main objective is to secure the well in an orderly manner when facing adverse environmental conditions.

A prerequisite to safe and efficient arctic offshore operations is an environmental monitoring and forecasting system. A comprehensive system has been established to support Shell's drilling activities in the Chukchi Sea. Components of the monitoring and forecasting system include meteorological observations, on-site weather forecasts, oceanographic observations, sea state forecasts, ice monitoring, and ice forecasting. In addition to the environmental monitoring and forecasting system, real-time measurements of drillship performance in ambient conditions is obtained from a performance-monitoring system installed onboard. An alert status system has been established onboard the drillship to anticipate hazardous ice and weather events and to assign pre-determined responses for all responsible personnel.

The COCP describes the comprehensive effort that Shell and the drillship contractors provide to ensure that drilling operations are conducted in a safe and prudent manner in the unique environment of the Chukchi Sea. The COCP is a component of the Applications for Permit to Drill submitted for approval to the BSEE. The COCP is also readily available onboard the drillship and in Shell's offices.

The COCP defines standards and guidelines for the conduct of operations on the drillship to minimize any hazard to personnel or the environment. In the Alaska Chukchi Sea, the two primary factors that can cause curtailment of critical operations and that potentially increase the risk of discharge while drilling are: sea ice and heavy weather. The objective of the COCP is to detail the critical drilling operations and the conditions under which such operations will be curtailed.

The COCP will be strictly followed to mitigate ice potentially forcing the drillship off location in an uncontrolled fashion.

N.4.4.5 Hours of Light at 71°N Latitude

In addition to severe weather and ice conditions described above, reduced hours of daylight occurring at the end of the drilling operations could increase the risk of a discharge during some activities. Daylight hours on the first day of each month at 71°N are as follows:

- January 0.0
- February 4.1
- March 9.5
- April 14.3
- May 19.9
- June 24.0
- July 24.0
- August 24.0
- September 14.6
- October 10.9
- November 5.7
- December 0.0

Drilling operations will be aided by drillship lights and portable lighting as necessary.

N.4.5 Discharge Detection [18 AAC 75.425(e)(2)(E)]

N.4.5.1 Drilling Operations

Visual surveillance is used for discharge detection. Visual inspections are an important component of leak and spill detection because automated systems may not detect small leaks and spills. The drillship and fuel-transfer operations will be closely monitored at all times (see Section N.4.1.6). Operations will be staffed 24 hours per day by drilling personnel. Once per day facility personnel will visually inspect tankage, sumps, and drains for indications of oil leaks. Piping, valves, pumps, and other machinery will also be visually inspected as part of the daily routine. Any oil leaks or spills will be noted, the source of the spill will be located and corrected, and the oil spill will be cleaned up. During drilling, drillers continually monitor the drilling equipment and will stop drilling if unsafe conditions are observed.

N.4.5.2 Automated Methods

The drillship has a system of controls, monitors, and procedures to assist in the early detection of potential discharges. For both downhole and surface operations, these detection systems include standard operating procedures governing the monitoring, handling, and containment of fluids. Specifically, visual and manual detection in combination with drilling policies and procedures allow for ample discharge detection.

Several independent ESD Systems limit the scope of any single failure. An ESD can be initiated by process conditions outside pre-set limits or manually initiated by operators at the instrument/control panels. Manually-actuated ESDs (punch-button panels) are also strategically placed throughout the facility. ESDs are specifically provided for the primary systems of ship operations, drilling operations, and fuel transfers. Drill operation shutdowns are located on the drilling unit floor. Fuel transfer ESDs are located on the lower and upper deck of the helideck. Ship-to-ship fuel transfer ESD and drilling operation shut downs, including associated hydraulic systems, are located on the drill floor. ESDs to shut down all ship operations are located in the emergency response room and in the semi-conductor room. Rounds are documented daily. Incidents are recorded using an approved incident reporting and investigation process.

Further discharge detection is allowed by the continuous monitoring of the drillship's bilge systems. Potential discharge collects in system where it eventually travels to the pump room. Visual surveillance of this bilge system's piping, valves, and pumps allows for early detection of a spill.

N.4.6 Rationale for Claimed Prevention Credits [18 AAC 75.425(e)(2)(F)]

Although Shell considers its well prevention and control measures "best in class," it will not be claiming any prevention credits to offset oil spill response planning requirements, based on exploration well operations as specified in 18 AAC 75.430 through 18 AAC 75.434.

The recovery equipment provided in support of this OSRP (See Appendix A – Response Equipment) substantially exceeds the mechanical recovery capability needed to contain the WCD (see Appendix C – WCD Scenario, and Sections N.1 and N.2 of this Appendix).

N.4.7 Compliance Schedule [18 AAC 75.425(e)(2)(G)]

Compliance schedule and waivers have not been requested at this time.

N.5 BEST AVAILABLE TECHNOLOGY [18 AAC 75.425(e)(4)]

This section discusses the BAT requirements contained in 18 AAC 75.425(e)(4)(A), (B), and (C) to address technologies not subject to RPS or performance standards in 18 AAC 75.445(k)(1) and (2). The discussion of each technology covers the requirement to analyze applicable technologies and to provide a justification that the technology used is BAT.

Additional information about BAT is also provided in the ACS Technical Manual, Volume I, Tactics L-11A through C.

In addition, Shell has reviewed the ADEC Best Available Technology 2004 Conference Report issued in June 2006 and has adopted the following recommended technologies for the purposes of this Appendix N of the OSRP.

- Annular water injection – Annular water injection is considered a proven breakthrough technology. It can be used during a spill response to expedite the transfer of discharged oil from a temporary storage tank to a more permanent storage facility. The technology involves reducing the discharge line pressure of a discharge hose by injecting a sleeve of water through the hose as the oil is pumped. The reduced pressure results in faster transfer rates and therefore, faster recovery time.
- GT-A Pumps – GT-A pumps are considered BAT and are used for lightening of viscous oil. During a spill response, the pumps significantly aid in the recovery efforts by accelerating the transfer rate for the discharge.

Shell has also selected response equipment for the containment and recovery of oil and the potential burning of oil that is considered to be the BAT for conditions commonly found in the Chukchi Sea. Brief descriptions of these systems follow:

- Transrec 150 weir skimmer is a well-proven recovery system and selected by major response organizations, including SERVUS, MSRC, and the NOFO, as the primary open-ocean-skimming device. NOFO has performed extensive field tests of the Transrec skimmer both in actual spill events and open ocean trials using free crude oil. Shell's OSR assets include four (4) Transrec 150 weir skimmers. The offshore OSR barge is equipped with two (2) skimmer units mounted near the stern of the vessel, port and starboard. The two VOSS, staged within 42 hr of the drill site, are each equipped with one skimmer unit mounted near the stern of the vessel. This configuration permits the self-propelled, floating skimmer heads attached to a 312-ft (95-m) umbilical hose to be maneuvered into the thickest oil layers within the apex of the containment boom for optimum recovery. Each Transrec 150 has a name-plate recovery capacity up to approximately 2,516 bbl/hr (400 cu m/hr), giving Shell's OSR skimming capability a combined total capacity up to 10,064 bbl/hr (1,600 cu m/hr).
- Lamor-Lori brush skimmers, each consisting of five parallel, stiff-brush chains, were selected as proven systems for conducting recovery operations. Shell's OSR vessel and Nearshore OSR barge are each equipped with two of these over-the-side skimming packages, yielding a total name-plate recovery capacity of approximately 2,580 bbl/hr or 410 cu m/hr for each vessel. The unique Lamor-Lori Recovery Channel design recirculates surface water back into the recovery area, increasing the system's overall throughput efficiency. The skimmer automatically separates oils, emulsions and oily debris/ice from sea water making efficient use of on-board storage. Recovered oil normally contains less than 5 percent free water.

- Lamor-Lori brush skimmers were selected as the primary recovery system for Shell's 47-ft, self-propelled skimmer that will be stored on, and launched from the OSR barge. This skimmer is capable of operating effectively at vessel speeds of 2 to 3 knots, which results in much higher oil encounter rates than other types of advancing skimmers. The built-in skimmers, one on each side of the vessel, with a name-plate recovery capacity of approximately 516 bbl/hr (82 cu m/hr) gives this system a total potential recovery of approximately 1,032 bbl/hr (164 cu m/hr). This skimming system is ideally suited for a broad range of oil viscosities; it can operate in adverse weather and sea conditions; and, it is sufficiently maneuverable for the recovery of oil trapped or herded in pockets against ice.
- Vertical Rope Mop Skimmers by Crucial Inc. have been selected as part of Shell's backup recovery system, each skimmer consists of eight continuous loops of oleophilic fiber mops with a combined name-plate capacity of approximately 503 bb/hr (80 cu m/hr). Stored onboard the OSR vessel, two of these skimmers provide an additional 1,006 bbl/hr (160 cu m/hr) recovery potential. Operated from a crane over the side of a skimming vessel or barge, these skimmers allow for the placement of the mops directly into heavy pockets of oil contained within a boom or trapped by ice.
- Small Duplex Disc/Brush skimmers (with a floating Lobe Pump) provide for the careful placement of a skimming device into smaller pockets of oil (within a boom or trapped among ice cakes). Two of these disc/brush skimmers, each rated at approximately 88 bbl/hr (14 cu m/hr), will be located onboard the primary OSR vessel, giving flexibility for the recovery of oil from isolated pools. Their combined recovery potential represents another approximately 176 bbl/hr (28 cu m/hr).
- RubberMax boom is made of vulcanized neoprene and hypalon, and is a durable, inflatable boom for use in open water and light ice conditions. The boom is manufactured to ISO 9001-2000 standards; has a high buoyancy-to-weight ratio; and, comes with a high visibility orange color. A complete system consists of a reel, power pack, and 200 m (656 ft) of boom. The height of the boom is 67 inches (170 cm) with a freeboard of 24 inches (60 cm) and a draft of 43 inches (110 cm). Eight of these systems will be available on site for use in multiple configurations such as a large open-apex deflection system; deflection booms secured to an OSR vessel, providing deflection for an OSR vessel; and as independent U-boom configurations for the collection of oil.
- Three water-cooled, Hydro-Fireboom packages, each with 500 ft (152 m) of inflatable boom [with 14-inch (36 cm) floatation and 18-inch (46 cm) skirt] are stored on Shell's OSR vessel and OSR barge. Each package is supported by two water pumps, along with long tow lines and fire hose assemblies to provide each of the booms in a U-configuration with adequate cooling seawater to keep the boom from being damaged by the intense (approximately 1,000 °C) flames of a contained oil fire. The boom is towed in a U-configuration to capture and burn contained oil, or it can be held (in a station-keeping mode) at a surfacing blowout, providing enough burn area to eliminate 10,000 to 15,000 bopd. This boom has undergone rigorous testing with pit burns and in large tanks (Ohmsett Facility in New Jersey).

N.5.1 Communications [18 AAC 75.425(e)(4)(A)(i)]

The communications system for use in a spill response at proposed locations is described in the ACS Tactics L-5 and L-11A, Shell Tactic LE-1, and in Section 2.4 of this OSRP. As described in Section 2.4 of the OSRP, satellite communications systems will be used to maintain compatibility with communication systems of Shell, ACS, all North Slope operators, and the

worldwide telephone network. Specifically, the drillship will be equipped with VSAT communication systems.

On-site communications systems are believed to be adequate for most Tier 1 response efforts. In the event of a major or moderate Tier II/Level III spill response, the Global Maritime Distress and Safety System (GMDSS) will be used to communicate with authorities. In the event of a major blowout, the existing on-site systems might not be accessible for safety reasons. However, blowout conditions require that an operations center is established.

N.5.2 Source Control [18 AAC 75.425(e)(4)(A)(i)]

The following sections provide an analysis of BAT as it relates to source control for a well blowout, and the avoidance of piping and valve failures on the diesel tanks located on the drillship. In addition to the narrative contained in these sections, loss of well control (i.e., a blowout) is also addressed in Section N.3 and Section N.4.1.8 of this Appendix, which includes a discussion of preventive measures that may be taken, along with other possible methods of well control. Shell's Well Control Plan provides a detailed assessment of various methods of well control including surface control measures, relief well drilling, blowout ignition, and the services of a professional well control firm, if well control is not regained by conventional mechanical means or natural bridging.

N.5.2.1 Well Source Control

This BAT analysis for well source control (Table N.5-1) reviews the techniques and methods to control a deep well blowout that has the potential to release liquid hydrocarbons to water surface. Inherent to this analysis is the assumption that the first three layers of prevention (see Section N.4.1.8 of this Appendix) have failed or have not been sufficient to control the well. The assumptions for this BAT analysis are that the following planned layers of prevention have failed:

- Even with the proper well planning and preparation, a kick occurred (Layer I);
- Early kick detection and timely implementation of kick response procedures were not sufficient to kill the well (Layer II); and
- A mechanical barrier (e.g., the BOP, casing, or cement) failed (Layer III).

Operations are also monitored by Shell's RTOC, which assists in monitoring operations, analyzing penetrated formations, and analyzing pressure trends. The Houston RTOC supplements the mud-logging capabilities of the drillship.

Surface Control Measures

Dynamic surface control is accepted by industry and government as a BAT method for source control of a blowout from an offshore well with a subsea BOP. Dynamic surface control is the process of pumping fluid down the drill string or casing, and circulating the fluid up the pipe by hole annulus at a sufficient rate to create fluid friction that will: a) match or exceed reservoir bottomhole pressure to stop the flow, b) flush hydrocarbons from the annulus, and, c) prevent annular plugging by friable formation flow (e.g., sand) that would cause the drill string or casing to become stuck in the hole. It is for this reason that an 8 ½-inch pilot hole is drilled below the 30-inch casing and opened to 26-inch to accept the 20-inch casing, another 8 ½-inch pilot hole is drilled below the 20-inch casing and opened to 17 ½-inch to accept the 13 3/8-inch casing and so on. In each hole segment, the smaller diameter pilot hole reduces the rate from an uncontrolled formation flow due to a limited area provided in the annulus between the drill string and the hole and it provides the optimum condition for killing the flow via the dynamic surface pumping technique. This same technique is used when intersecting a blowing well with a relief well. Fluid is pumped down the relief well and up the blowout well at a rate sufficient to kill the flow by creating fluid friction in what is commonly called a dynamic kill. This is not the same as Layer II of well control as described in Section N.4.1.8 which involves early kick detection and kick control, usually shutting in the well rapidly. Dynamic Surface Pumping is a technique used to control a flow after it begins. Kick circulation is normally done at slower pump rates where fluid friction in the annulus is not needed as a control mechanism.

The following factors could limit the effectiveness of surface control measures:

- BOP element failure.
- Insufficient pump rate. In the event that the available pump capacity is insufficient to kill the well, other methods with lower rates can be applied to kill the well (e.g., weight and wait).
- Inability to divert the blowout fluid and ensure a safe environment for workers.

In the unlikely event of a blowout, Shell would attempt to kill the well via dynamic surface control methods. Factors that would make this method infeasible include:

- Any situation where the BOP has failed and was not available to hold back pressure on the well;
- Efforts were implemented to divert the blowout fluids to create a safe work environment;
- The drilling equipment was damaged to an extent to make it ineffective; or
- The vessel had to move off the location for safety and/or vessel stability reasons.

Concurrent with implementing surface control techniques, Shell would be preparing to mobilize and drill a relief well as a contingency.

Well Capping

Subsea well capping capability has recently been developed that will secure a blowout by installing a purpose-built capping stack directly onto the top of the wellhead or a component of the original BOP stack. These techniques have been utilized and proven effective in dealing with several wells in the Gulf of Mexico following storm damage to platforms that initiated a well control event. Additionally, well capping was successfully employed to stop the flow from the Macondo well blowout in deep water. When compared to the time required for drilling a relief well, well capping can be more rapidly implemented to reduce or stop flow of oil escaping into the water column thereby reducing associated environmental impacts.

**Table N.5-1
Best Available Technology Analysis
Well Blowout Source Control**

BEST AVAILABLE TECHNOLOGY (BAT) EVALUATION CRITERIA	PROPOSED METHOD: DYNAMIC SURFACE CONTROL	ALTERNATE METHOD: WELL CAPPING	ALTERNATE METHOD: RELIEF WELL DRILLING
<p>AVAILABILITY: Whether technology is best in use in other similar situations or is available for use by applicant</p>	<p>Dynamic surface control is in use globally.</p>	<p>Subsea capping capability has recently been developed that will allow a blowout to be secured by installed a purpose-built capping stack directly onto the top of the wellhead or a component of the original BOP stack. By closing valves on this capping stack, flow can quickly be halted. In the alternative, kill fluids can be pumped from a surface vessel into the flowing well to stop the flow.</p>	<p>Relief well drilling equipment (drilling unit downhole tools, etc.) are widely available aside from equipment required from a few specialty providers (e.g., ranging services).</p>
<p>TRANSFERABILITY: Whether each technology is transferable to applicant's operations</p>	<p>Technique is directly transferable, and equipment is the same as is used on the drillship during normal operations.</p>	<p>This technique is directly transferrable to Shell's operations in the Chukchi Sea. There are several capping systems now available commercially, although Shell's arctic capping stack was designed for exploration wells in the Chukchi Sea.</p>	<p>Relief well drilling is directly transferable and can be performed by the drillship in use by Shell in the Chukchi Sea.</p>
<p>EFFECTIVENESS: Whether there is a reasonable expectation each technology will provide increased spill prevention or other environmental benefits</p>	<p>In the majority of cases, the technique is highly effective. Application of dynamic surface control provides the best opportunity for minimizing pollution impacts because most blowout wells are controlled with dynamic surface controls while other methods are being mobilized. Technique would not be effective if BOP had failed, and a safe work environment could not be ensured in the event of extensive drillship or equipment damage, or if the drillship had to move from the location.</p>	<p>Capping has proven to be effective in dealing with several wells in shallow water in the Gulf of Mexico following storm damage to platforms that initiated a well control event. Capping was most recently used to stop the flow from the BP Macondo well after a subsea blowout in deep water in the GOM.</p>	<p>Technique is generally understood to be effective in a wide range of situations.</p>
<p>COST: The cost to the applicant of achieving BAT, including consideration of that cost relative to the remaining years of service of the technology in use by the applicant</p>	<p>The costs are relatively low, assuming that the drillship is available to kill the well and consumables such as drilling fluids and cement are readily available.</p>	<p>Cost for capping equipment are relatively low compared with other drilling costs and the cost of drilling a relief well and extending the time required for surface cleanup operations. The capping equipment will be available for deployment from one of the surface support vessels at or near the drill site.</p>	<p>The cost of permitting, mobilization, and executing relief wells is high. Costs include day-rate of the vessel to drill the relief well, casing, drilling fluids and other consumables, as well as the cost of lost opportunity should the vessel have to prematurely end work on its intended prospect.</p>

Table N.5-1 (Continued)
Best Available Technology Analysis
Well Blowout Source Control

BEST AVAILABLE TECHNOLOGY (BAT) EVALUATION CRITERIA	PROPOSED METHOD: DYNAMIC SURFACE CONTROL	ALTERNATE METHOD: WELL CAPPING	ALTERNATE METHOD: RELIEF WELL DRILLING
<p>AGE AND CONDITION: The age and condition of technology in use by the applicant</p>	<p>The age and condition of the drilling equipment is appropriate for the operation. Equipment is the same as is used on the drillship during normal operations.</p>	<p>Capping equipment is compatible with the wellheads, BOP stacks and connections available thereto. The capping stack involves components that are similar to those found in subsea blowout preventers used in normal exploration drilling operations.</p>	<p>The age and condition of the drillship and associated equipment available for a relief well are appropriate for the operation.</p>
<p>COMPATIBILITY: Whether each technology is compatible with existing operations and technologies in use by the applicant</p>	<p>Technology is compatible and equipment is the same as is used on the drillship during normal operations.</p>	<p>Capping equipment is compatible with the wellheads, BOP stacks and connections available thereto. The capping stack involves components that are similar to those found in subsea blowout preventers used in normal exploration drilling operations.</p>	<p>Technology is compatible. The drillship has comparable equipment available.</p>
<p>FEASIBILITY: The practical feasibility of each technology in terms of engineering and other operational aspects</p>	<p>Method is feasible for all drilling operations. Would not be a feasible option if the BOP had failed. Applied at the surface, the technology is not sensitive to well type. Demonstrated success in historical well control efforts.</p>	<p>Capping technology is both feasible and operationally viable. Recent engineering designs have proven to be effective and will be expected to provide blowout control even in the event of a failed blowout preventer.</p>	<p>Method feasibility is contingent upon geographical access near area of blowout. Seasonal ice conditions (e.g., offshore Chukchi) limit application to the drilling season.</p>
<p>ENVIRONMENTAL IMPACTS: Whether other environmental impacts of each technology, such as air, land, water pollution, and energy requirements, offset any anticipated environmental benefits</p>	<p>Technology provides the best-proven opportunity to quickly reduce environmental impacts.</p>	<p>Deployment and rapid blowout shutoff will reduce the volume of oil escaping into the water column from a subsea flow thereby reducing environmental impacts when compared to the time required for drilling a relief well. No additional impacts would result from, say, mooring the relief well drilling vessel, constructing a mudline cellar or discharging waste streams into the sea. In short, capping is the leading concept for shallow water blowout control in the Chukchi Sea.</p>	<p>Technology provides additional exposure and environmental risks during application (additional well control problems). Additional environmental costs would include the resource consumption (e.g., fuel, casing, and drilling fluids), waste generated, and emissions associated with drilling the relief well. Technology application may be seasonally limited, leading to durations of 60-180 days. Drilling a relief well is accompanied by the additional risk of a second well control event.</p>

Relief Well Drilling

A relief well would be drilled by the drillship in the Chukchi Sea (Section N.3 of this Appendix and Appendix C). During a blowout, the drillship would be redeployed to a suitable location to initiate a relief well.

Relief well drilling in a blowout zone can be a time-consuming and costly process. The lead-time involved drilling a relief well necessitates early planning. Within Shell's exploration, it is estimated that once on location, a relief well can be drilled within 25 days for TVD up to 8,000 ft (2,348 m) in the Chukchi Sea. The relief well plan may be initiated concurrently with the implementation of control methods. The total time to regain well control via a relief well would depend on the depth of well interception required and ice and water conditions. Statistically, it is more than likely that the blowout well would kill itself before the need to mobilize the drillship.

Relief well drilling technology is compatible with drilling operations in the Chukchi, although it may be sensitive to both the well location and well type. Downhole and surface equipment (e.g., tubulars, wellheads, or similar equipment) is readily available to support relief well drilling operations.

Relief well drilling has been attempted only once on the North Slope as a mitigation measure to control a blowout. The 1992 incident was a natural gas blowout while drilling the ARCO Cirque exploration well. Control of the well was regained in approximately two weeks through the application of surface well capping techniques assisted by natural bridging.

Because Shell's plans for the Chukchi Sea do not include extended reach wells, relief well operations would be relatively straightforward in comparison to the original well, apart from ensuring well intersection. The differences between the two wells would be:

- There is no MLC for the relief well;
- There is no open-hole logging on wireline at casing points for relief well; and
- The use of ranging services to specifically locate the original wellbore.

Relief well drilling in the Chukchi Sea would be similar to current methods used to drill offshore wells elsewhere in the world. Advances in directional technology that allow for more precise wellbore placement increase the likelihood of success of drilling a relief well.

N.5.2.2 Tank Source Control

Drillship tanks are inspected in accordance with API 653 by the BSEE and USCG as part of the drillship inspection prior to exploration activities.

Fuel storage tanks are equipped with manual shutdown valves that remain closed except during fuel transfer operations. Remote temporary exploration sites will be staffed 24 hrs/day. BMPs indicate two operators present and in direct line of sight and in constant communication for the duration of the fuel transfer, with one person having the ability to shut down the fuel transfer in the event of an emergency.

N.5.3 Trajectory Analyses [18 AAC 75.425(e)(4)(A)(i)]

As exploration drilling utilizes a subsea BOP, oil associated with a blowout WCD is presumed to reach the mud-water interface (i.e., seabed) almost immediately. Various techniques for

monitoring the spill trajectory include the use of the established oil spill trajectory models (e.g., GNOME, OILMAP) and use of aerial reconnaissance.

Computer-based trajectory analyses (see Appendix C – WCD Scenario) were performed using Shell-collected wind data and modeled currents for the Chukchi Sea. The trajectory presented in Appendix C (WCD Scenario) is based upon the assumption that oil on open water moves as the sum of vectors representing surface currents and wind speed. The results of the trajectory analysis are present in Appendix C, Figure C-1. Additional computer trajectories were run to calculate minimum response times under specific wind conditions to deploy shoreline protection for environmentally sensitive sites located between Point Barrow and Point Hope (see Section 2.7 of the OSRP).

N.5.4 Wildlife Capture, Treatment, and Release Programs [18 AAC 75.425(e)(4)(A)(i)]

Wildlife capture, treatment, and release programs are described in the ACS Technical Manual, Volume 1, Tactic L-11C, and related Tactics W-1 through W-5, and the ARRT *Wildlife Protection Guidelines for Alaska* (Annex G of the ARRT Unified Plan). These programs are considered BAT for this exploration program.

Additional information is provided in the Shell WRP (Appendix I).

The *Discoverer* drillship will have PSOs onboard at all times. This is considered the BAT for wildlife monitoring.

N.5.5 Cathodic Protection [18 AAC 75.076(h)(4)(A)(ii)]

Not applicable.

N.5.6 Leak Detection Tanks [18 AAC 75.425(e)(4)(A)(ii)]

Visual inspection is BAT for the detection of leaks from drillship tanks. The drillship will be staffed 24 hrs/day during operations and closely monitored at all times for leaks. Standard operating procedures and BMPs provide for daily inspections of fuel tanks. Personnel will visually inspect tankage, sumps and drains at a minimum once per day for indications of leakage. Daily visual inspections, as outlined in Section N.4.5, provide the most reliable, feasible, and cost-effective means to detect leaks.

Prior to exploration operations, drillship tanks are inspected in accordance with American Petroleum Institute (API) 653 by the BSEE and USCG as part of the drillship inspection to ensure the structural integrity of all components.

These inspections are evaluated in Table N.5-2 in accordance with the criteria set forth in 18 AAC 75.445(k)(3) and ACS Tactic L-11.

N.5.7 Tank Liquid Level Determination [18 AAC 75.425(e)(4)(A)(ii)]

Tank liquid levels are manually measured to determine the required volume prior to any fuel transfer. The levels are determined either by visual observation through the tank opening using sightglass readings or by manual soundings with an applicable sounding tape. Manual soundings are taken at any time that there is an uncertainty with other sounding methods. Fluid transfers follow the inspection and procedures presented in Appendix M (USCG Supplement).

Tank liquid levels in temporary and deck-mounted equipment will be checked primarily by visual means prior to filling (e.g., by direct observation through the hatch or fill cap using a flashlight). Direct visual observation using a flashlight is highly reliable, as a functional check is performed on the flashlights prior to use and actual liquid levels are noted. Visual observation may be more accurate and reliable than other devices such as sightglasses, float gauges, or tank strapping, due to the tendency for these devices to fail under arctic conditions (BAT). BMPs indicate two operators present, in direct line of sight of each other, and in constant communication via radio or hand signal, for the duration of the fuel transfer, with one person having the ability to shut down the fuel transfer in the event of an emergency. Tank liquid levels will be monitored visually (e.g., by direct observation through the hatch using a flashlight) throughout the duration of the filling process. Key times for visual observations include the refueling of both the wireline unit and the crane fuel tanks.

The *Discoverer's* major integral tanks are sounded at least once per day to verify liquid levels. Tank levels also are manually measured prior to any fuel transfer to determine their volume and remaining capacity. Strict procedures are observed for fuel transfer and discharge prevention. Fuel transfers between internal tanks and onboard equipment are made regularly, depending on equipment and usage. Fuel transfers include manual opening of valves, filling the tanks, and manually closing the tanks. Visual inspection and proper communication between the pump operator and the person supervising the tank fueling is considered BAT for these transfers. Overflow from the temporary or deck equipment fuel tanks are captured in drip pans and deck drains.

All fuel transfers to temporary or deck fuel tanks are executed under the Permit to Work system following an associated Job Safety Analysis. Preventative maintenance measures of control include careful planning of equipment placement for the storage tanks. For example, temporary and deck equipment are not positioned over open grating if they are equipped with fuel tanks or associated fueling facilities.

Tank liquid level determination systems are evaluated in Table N.5-3. These visual and manual methods, together with adhere to strict procedures, are a proven BAT method for monitoring tank levels. These methods are as good as or better than the alternative methods presented in this document (Section N.5), and provide the most reliable, feasible, and cost-effective alternative.

**Table N.5-2
Best Available Technology Analysis
Leak Detection for Tank**

BEST AVAILABLE TECHNOLOGY (BAT) EVALUATION CRITERIA	CURRENT METHOD: VISUAL INSPECTIONS
AVAILABILITY: Whether technology is best in use in other similar situations or is available for use by applicant	This approach has been extensively used for similar exploration drillships and is currently proposed by Shell.
TRANSFERABILITY: Whether each technology is transferable to applicant's operations	This approach is directly transferable for Shell operations.
EFFECTIVENESS: Whether there is a reasonable expectation each technology will provide increased spill prevention or other environmental benefits	Effective with strict adherence to BMPs and local 24-hr staffing at drill sites provides a reliable and effective method of leak detection.
COST: The cost to the applicant of achieving BAT, including consideration of that cost relative to the remaining years of service of the technology in use by the applicant	No cost.
AGE AND CONDITION: The age and condition of technology in use by the applicant	Not applicable.
COMPATIBILITY: Whether each technology is compatible with existing operations and technologies in use by the applicant	Compatible and widely used on remote drilling operations. Requires no change.
FEASIBILITY: The practical feasibility of each technology in terms of engineering and other operational aspects	Currently planned to be used and is feasible. With 24-hr operations on the drillship, this provides a practical and reliable method of leak detection.
ENVIRONMENTAL IMPACTS: Whether other environmental impacts of each technology, such as air, land, water pollution, and energy requirements, offset any anticipated environmental benefits	None.

**Table N.5-3
Best Available Technology Analysis
Tank Liquid Level Determination System**

BEST AVAILABLE TECHNOLOGY (BAT) EVALUATION CRITERIA	PROPOSED METHOD: VISUAL INSPECTION AND MANUAL GAUGING	ALTERNATIVE 1: SIGHT GLASS WITH BALL CHECK VALVE CONTROL SYSTEM	ALTERNATIVE 2: FLOAT LEVEL GAUGE (VAREC) CONTROL SYSTEM
AVAILABILITY: Whether technology is best in use in other similar situations or is available for use by applicant	Proposed method.	Sight glass with ball check valve systems are used today, but less frequently than other devices.	Float-actuated level gauges, such as Varec devices, are widely used in the industry today
TRANSFERABILITY: Whether each technology is transferable to applicant's operations	Transferable.	Undetermined.	Transferable.
EFFECTIVENESS: Whether there is a reasonable expectation each technology will provide increased spill prevention or other environmental benefits	Highly effective with strict adherence to BMPs and local procedure. Tank liquid levels will be determined from direct observation through the hatch using a flashlight and manual measurement. As good as or better than other "low tech" devices.	Not effective in this application. Sight glass systems are prone to breaking, becoming obstructed, and freezing if moisture buildup occurs in the tubing. In addition, the ball check valves are prone to freezing and sticking in either the open or closed position.	Effective in this application. However, condensation or freezing conditions may obscure the measurement reading window. In addition, this system will provide inaccurate measurements if there is uneven sedimentation build up in the tank.
COST: The cost to the applicant of achieving BAT, including consideration of that cost relative to the remaining years of service of the technology in use by the applicant	Not applicable.	Undetermined.	Undetermined.
AGE AND CONDITION: The age and condition of technology in use by the applicant	Procedures have been in place at North Slope facilities since 1993 for visual fuel transfer operations and tank strapping devices have been in use for 50 years.	Sight glass devices have been used in the industry for over 20 years, mostly on permanent tanks.	Float-actuated devices have been used in the industry for over 20 years.
COMPATIBILITY: Whether each technology is compatible with existing operations and technologies in use by the applicant	Compatible and widely used. Requires no change.	Compatible but breakage potential is a concern.	Compatible and used in the industry on tanks in Alaska.
FEASIBILITY: The practical feasibility of each technology in terms of engineering and other operational aspects	Feasible and preferred due to reliability in conjunction with BMP and monitoring procedures.	Sight glass devices are typically not used in exposed areas as they can become a source for a leak if damaged.	Feasible, but would require some engineering modifications to install and operational modifications. There is concern over the use of float devices due to several failures of float devices within the state.
ENVIRONMENTAL IMPACTS: Whether other environmental impacts of each technology, such as air, land or water pollution, and energy requirements offset any anticipated environmental benefits	None.	None.	None.

N.5.8 Maintenance Procedures for Buried Steel Piping [18 AAC 75.425(e)(4)(A)(ii)]

Not Applicable.

N.5.9 Protective Wrapping or Coating for Tanks and Pipeline [18 AAC 75.425(e)(4)(A)(ii)]

Not Applicable.

N.5.10 Corrosion Surveys for an Existing Installation

Not Applicable.

N.5.11 Pipeline Leak Detection

Not Applicable.

N.6 RESPONSE PLANNING STANDARDS [18 AAC 75.425(e)(5)]

This section discusses the applicable RPS used in this plan, as set forth in 18 AAC 75.430 through 18 AAC 75.440 and 18 AAC 75.442.

N.6.1 Well Blowout

ADEC's regulations, 18 AAC 75.434, establish that an RPS volume for an exploration facility to be 5,500 bopd, or best producing well data, for the duration of 15 days (18 AAC 75.434). For planning purposes, the total RPS volume in the ADEC-Specific Scenario is based upon the WCD volume of 25,000 bopd for the duration of 15-day time period ($25,000 \times 15 = 375,000$ bbl) (Section N.1 and N.2 of this Appendix). See Appendix C for a discussion of reservoir characteristics.

For storage purposes, an emulsion factor of 1.54 and a percentage of free water (20 percent) has been added to the initial RPS of 375,000 bbl [$(375,000 \times 1.54 = 577,500) + (375,000 \times 0.20 = 75,000) = 652,500$] for a total storage volume of 652,500 bbl.

N.6.2 Fuel Transfer Strategy [18 AAC 75.025]

The WCD for the fuel transfer strategy prepared for this OSRP is based on the definition contained in 33 CFR 154.1029(b)(2), using the following values:

- maximum time to discover release: 5 min
- maximum time to shutdown pumping: 0.5 min (30 sec)
- maximum transfer rate: 320 gpm (based on representative fuel transfer pumps = 7.6 bbl/min)
- total line drainage volume: 163 gal [premising 4 inch by 820 ft (10 cm by 250 m)] marine hose between the pump manifold on the barge and the delivery flange on the inlet piping at the drillship) or 3.9 bbl

N.6.3 Rationale for Claimed Prevention Credits [18 AAC 75.425(e)(2)(F)]

Although Shell considers its well prevention and control measures "best in class," it will not be claiming any prevention credits to offset oil spill response planning requirements, based on exploration well operations as specified in 18 AAC 75.434.

The recovery equipment provided in support of this OSRP (refer to Table N.6-1 and Appendix A – Response Equipment) substantially exceed the mechanical recovery capability needed to contain the RPS. The recovery of offshore oil meets the State of Alaska RPS as it accounts for

the assumption that 10 percent of the 25,000-bopd discharge escapes the primary offshore recovery efforts at the blowout. For planning purposes, Shell's conservative approach to the development of their OSR program was based upon the need to ensure adequate response capability and to scale the potential shoreline response assets needed to protect sensitive areas.

As required by 18 AAC 75.425, the recovery rates in Table N.6-1 also account for each asset's need to manage on-water storage limitations and time to offload interim storage to the OST. The State of Alaska's standards and evaluation criteria include demonstration of capability by time and equipment de-rated recovery capacities. Shell's offshore skimming capability meets the recovery needs within the required timeframe.

There are several inherent differences in presentation of recovery capability information between the State of Alaska and that required by 30 CFR 254. BSEE evaluates the effective daily recovery capacities per 30 CFR 254.44 criteria (Table C-3). Based upon the respective calculations, Shell's response capability in the Chukchi Sea meets the federal and state standards for demonstrating sufficient recovery capacity.

**Table N.6-1
Well Blowout in Summer
Derated Potential Recovery Capability**

A SHELL / ACS SPILL RECOVERY TACTIC	B RECOVERY SYSTEM	C NUMBER OF SYSTEMS	D DERATED RECOVERY CAPACITY PER SKIMMER ^{1,2} (BBL/HR)	E SCENARIO RECOVERY RATE ^{3,4} (BBL/HR)	F MOBILIZATION AND TRANSIT TIME TO SITE (TIME)	G OPERATING TIME ON DAY 1 (HR/DAY)	H DERATED RECOVERY CAPACITY ON DAY 1 ⁵ [BBL/DAY] (C X D X G)	I 24 HR OPERATING PERIODS			L 48 HR OPERATING PERIODS
								DERATED RECOVERY CAPACITY ON DAY 2 ^{5,6} (C X D X 24 HR)	DERATED RECOVERY CAPACITY ON DAY 3 ^{5,6} (C X D X 24 HR)	DERATED RECOVERY CAPACITY ON DAY 4 ^{5,6} (C X D X 24 HR)	DERATED RECOVERY CAPACITY AFTER DAY 4 ⁷ (C X D X 24 HR)
OFFSHORE RECOVERY											
TF -1: Shell OR-2A, OR-2B	Lamor LSC-5	2	258	938	<1 hr	23	11,868	0	12,384	0	12,384
TF-2: Shell OR-2B	Transrec 150	2	503	938	3 hr	21	21,126	24,144	0	24,144	24,144
TF-4: Shell OR-10	Transrec 150	1	503	938	42 hr	0	0	0	12,072	0	12,072
TF-5: Shell OR-10	Transrec 150	1	503	938	42 hr	0	0	3,018	0	12,072	12,072
NEAR SHORE / SHORELINE RECOVERY											
TF-6 Shell OR-1A, OR-1B	Lamor LSC-5	2	258	104	96 hr	0	0	0	0	0	12,384
TF-6: Shell OR-4A, OR-4B	Lamor LORS- 2C	2	103	104	96 hr	0	0	0	0	0	4,944
TF-8: ACS R-16	Hook boom configuration with oleophilic skimmer	10	10	104	96 hr	0	0	0	0	0	2,400
TOTAL BBLs OF RECOVERED LIQUIDS/DAY							32,994 ⁸	27,162 ⁸	24,456 ⁸	36,216 ⁸	80,400 ⁸

Table N.6-1
Well Blowout in Summer
Derated Potential Recovery Capability (Continued)

1. Pumps are derated to 20% per 30 CFR 254.44 (a) and (b).
2. Pump performance calculations assume one (1) cu m equals 6.29 bbl (U.S. oil).
3. The offshore scenario recovery rate is based upon the planning assumption that of 1,042 bbl/hr of oil released per hour a 90% fraction of the release volume (938 bbl/hr) remains offshore for recovery and a 10% fraction (104 bbl/hr) may escape the primary offshore recovery operations and drift toward the nearshore and shorelines. The derated recovery capacity of the listed operating skimmers exceeds the estimated quantity of oil available for recovery within a 24 hr period.
4. The nearshore recovery rate is based upon the planning assumption that a 10% fraction of the daily release volume (104 bbl/hr) may escape the primary offshore recovery operations and drift toward the nearshore and shorelines. Based upon trajectory modeling, oil would reach the nearshore at the earliest after Day 6 and only in the unlikely event of sustained winds from the W or WNW. The scenario trajectory developed using historical winds and the BOEM Chukchi current model shows that oil has a low probability of shoreline contact by Day 28.
5. The scenario recovery rate of 938 bbl/hr is assumed to be shared between recovery systems. The combined systems have sufficient recovery and storage capacity to operate for the 24 hr period.
6. After Hour 42, recovery calculations assume that operations go into a 24-hr rotation with TF2 and TF-5 alternating with TF-1 and TF-4 as skimming platforms to maintain recovery operations. TF-2 and TF 5 recovers for 24 hr at a time using the Transrec 150 while TF-2 and TF-5 lighters to the OST. During the next 24-hr cycle TF-2 and TF-5 recovers using the Lamor side collectors and Transrec 150 skimmers while TF-1 and TF-4 lighter to the OST For purposes of calculating total recovery, 24 hr of recovery per day is used for the skimming systems.
7. Beyond Day 4, a 48-hr operating period is used to calculate recovery. TF-1, TF-2, TF-3 and TF-4 operate on 24-hr rotation cycles while TF-6, TF-7 and TF-8 operate based upon a 12 hr shift per day or two shifts per 48 hr.
8. Skimming capacity exceeds the daily offshore recovery rate of 1,042 bbl/hr (938 bbl/hr offshore and the 104 bbl/hr assumed to drift toward the nearshore).

THIS PAGE
INTENTIONALLY
LEFT BLANK