

L. W. Morland
University of East Anglia
Norwich, UK

E. N. Earle
Shell Development Company
Houston, Texas USA

CORRELATION OF SHEAR BEHAVIOR OF ICE WITH BIAxIAL STRESS
RESPONSE

ABSTRACT

At high temperatures and low strain rates ice may be approximately incompressible. We show that if it were truly incompressible, conventional triaxial tests would provide no more information concerning its response to multiaxial loading than would uniaxial tests. However, biaxial tests do provide multiaxial response information. At low temperatures and high strain rates conventional triaxial tests may provide more information than biaxial tests.

INTRODUCTION

Any useful model of the mechanical behavior of ice must describe response to general multiaxial loading. Present knowledge is limited almost entirely to results of uniaxial compression tests, which cannot determine response to general multiaxial loading. This requires tests with three independent components of loading. Since such tests are difficult to perform, we consider how completely multiaxial response is determined by two simpler tests: conventional triaxial and biaxial tests. We find that when response is strongly pressure dependent (at high strain rates and low temperatures), conventional triaxial tests provide more information than biaxial tests. If response is relatively independent of pressure (high temperature and low strain rates), the reverse is true.

While uniaxial tests cannot determine multiaxial response, they can provide a basis for a heuristic construction of multiaxial relations. In a series of papers, Morland and

Spring have constructed multiaxial nonlinear viscoelastic constitutive relations of the differential type, /1/, /2/, and /4/ and of the integral type, /3/ and /5/. An example is the following isotropic incompressible solid relation of the differential type from /4/:

$$\begin{aligned} \dot{\underline{S}} + \underline{S} (\underline{D} + \underline{W}) + (\underline{D} - \underline{W})\underline{S} - \frac{2}{3} \text{tr} (\underline{S} \underline{D}) \underline{1} + \phi \underline{S} \\ = \phi_1 \underline{D} + \phi_2 \underline{D}^2 - \frac{1}{3} (\text{tr} \underline{D}^2) \underline{1} + \omega_1 \left[\underline{B} - \frac{1}{3} (\text{tr} \underline{B}) \underline{1} \right] \\ + \omega_2 \left[\underline{B}^2 - \frac{1}{3} (\text{tr} \underline{B}^2) \underline{1} \right] \end{aligned} \quad (1)$$

This relates the tensor quantities, deviatoric stress \underline{S} ; strain rate \underline{D} ; rate of rotation \underline{W} ; and strain \underline{B} , through the (scalar) response coefficients ϕ , ϕ_1 , ϕ_2 , ω_1 , ω_2 . These later are material properties which depend in general on \underline{S} , \underline{B} , \underline{D} , and their products and/or derivatives. The operator tr is the sum of diagonal elements, and $\underline{1}$ is the unit tensor. P It is sufficient to consider only stress to make our point. Since we will compare compressible with incompressible behavior, it is convenient to use \underline{S} . This is related to stress $\underline{\sigma}$, by ←

$$\underline{S} = \underline{\sigma} + p \underline{1}, \quad (2)$$

where

$$p = -\frac{1}{3} \text{tr} \underline{\sigma} = -\frac{1}{3} (\sigma_1 + \sigma_2 + \sigma_3) \quad (3) \quad \leftarrow$$

is the pressure. ^{sp} Here σ_1 , σ_2 , and σ_3 are the principal components of stress. The principal components of \underline{S} are thus

$$S_1 = \frac{2}{3} \sigma_1 - \frac{1}{3} (\sigma_2 + \sigma_3), \quad S_2 = \frac{2}{3} \sigma_2 - \frac{1}{3} (\sigma_1 + \sigma_3), \quad (4)$$

$$S_3 = - (S_1 + S_2)$$

In the following we assume only that the constitutive relations are isotropic. This is equivalent to requiring that response coefficients depend on $\underline{\sigma}$ only through its invariants J_1 . A complete set of stress invariants is

$$J_1 = p$$

$$J_2 = \frac{1}{2} \text{tr}(\underline{S}^2) = \frac{1}{3} [\sigma_1^2 + \sigma_2^2 + \sigma_3^2 - (\sigma_1\sigma_2 + \sigma_2\sigma_3 + \sigma_3\sigma_1)] \quad (5)$$

$$J_3 = \det \underline{S} = \frac{1}{27} [(2\sigma_1 - \sigma_2 - \sigma_3)(2\sigma_2 - \sigma_3 - \sigma_1)(2\sigma_3 - \sigma_1 - \sigma_2)]$$

For completeness, note that the model leading to equation 1 could be extended to account for compressibility by adding a relation between change in volume and pressure.

APPROACH

Our approach is based on the observation that to completely determine response to multiaxial loading we must know each of the response coefficients for all possible sets of values (p, J_2, J_3) . Let p, J_2 and J_3 be axes in a cartesian coordinate system. The point (p, J_2, J_3) is in the stress invariants space for a type of test if in that test we may control the stress so that the invariants of the stress tensor have the values p, J_2 and J_3 . Only a true triaxial test can cover the entire space. The more of this space a test can cover, the more completely it can determine multi-axial response.

Multiaxial Stress Geometries

First we introduce precise terminology for four possible situations. The case of three independent principal stress $\sigma_1, \sigma_2, \sigma_3$ will be denoted triaxial stress, abbreviated by TS. Conventional triaxial stress refers to two independent components σ_1 and σ_2 (say), with $\sigma_3 = \sigma_2$, so is correctly described as transversely isotropic stress, abbreviated to TIS. That is, there is an axial stress σ_1 with isotropic stress in the normal plane. The case with two independent components σ_1 and σ_2 and $\sigma_3 = 0$ is biaxial stress (zero stress in the third direction) abbreviated to BS. Finally, uniaxial stress, abbreviated to US, has one nonzero component σ_1 . In summary,

TS (triaxial stress):

3 independent components σ_1 , σ_2 , and σ_3 ; (6)

TIS (transversely isotropic stress):

2 independent components σ_1 and σ_2 , with $\sigma_3 = \sigma_2$; (7)

BS (biaxial stress):

2 independent components σ_1 and σ_2 , with $\sigma_3 = 0$; (8)

US (uniaxial stress):

1 independent component σ_1 , with $\sigma_2 = \sigma_3 = 0$. (9)

In TS, p , J_2 , and J_3 are given by equation 5. In TIS (7) with $\sigma_3 = \sigma_2$,

$$S_1 = \frac{2}{3}(\sigma_1 - \sigma_2), S_3 = S_2 = -\frac{1}{3}(\sigma_1 - \sigma_2), = -\frac{1}{2} S_1, \quad (10)$$

$$p = -\frac{1}{3}(\sigma_1 + 2\sigma_2), J_2 = \frac{1}{3}(\sigma_1 - \sigma_2)^2, J_3 = \frac{2}{27}(\sigma_1 - \sigma_2)^3,$$

Here there is only one independent deviatoric stress S_1 , so even though two independent stresses σ_1 and σ_2 are applied and varied, only one deviatoric relation is obtained. That is, the deviatoric behavior cannot be determined, noted by Morland /1/.

In BS (8) with σ_3 ,

$$S_1 = \frac{2}{3} \sigma_1 - \frac{1}{3} \sigma_2, S_2 = \frac{2}{3} \sigma_2 - \frac{1}{3} \sigma_1,$$

$$p = -\frac{1}{3}(\sigma_1 + \sigma_2), J_2 = \frac{1}{3} \left(\sigma_1^2 + \sigma_2^2 - \sigma_1 \sigma_2 \right), \quad (11) \quad \leftarrow$$

$$J_3 = \frac{1}{27}(\sigma_1 + \sigma_2)(\sigma_1 - 2\sigma_2)(2\sigma_1 - \sigma_2),$$

so S_1 and S_2 are independent, and J_2 and J_3 are independent.

Finally, US (9) with $\sigma_3 = \sigma_2 = 0$ is a special case of TIS, giving

$$S_1 = \frac{2}{3} \sigma_1, S_3 = S_2 = -\frac{1}{3} \sigma_1, = -\frac{1}{2} S_1, \quad (12)$$

$$p = -\frac{1}{3} \sigma_1, J_2 = \frac{1}{3} \sigma_1^2, J_3 = \frac{2}{27} \sigma_1^3.$$

As with TIS, only one independent deviatoric relation is obtained.

Dependence Domains in Stress Invariants Space

Since in either BS or TIS tests only two components of stress can be varied, it is not possible to determine response independently to all of p , J_2 , and J_3 . If response is relatively independent of one of these, we may interpret test results in terms of the other two.

For example, ice is occasionally assumed incompressible, which is equivalent to assuming the response is independent of p . There is reason to believe this is approximately true at high temperatures and low strain rates (see reference /6/). Response then depends primarily on J_2 and J_3 . Thus we first consider the stress invariant space (J_2, J_3). Ice response is pressure dependent in other temperature-strain rate regimes /6/, so we subsequently consider response in the (p, J_2) space.


In practice, multiaxial tests will be commonly restricted to compressive stresses $\sigma_1 \leq 0, \sigma_2 \leq 0, \sigma_3 \leq 0$, which limits the domain of the (J_2, J_3) plane covered in the US, TIS, and BS geometries. Note that $J_2 \geq 0$ by definition, but J_3 can be positive or negative. Dependence on J_3 (or p) is necessary if compression and tension responses are not symmetric.

PRESSURE INDEPENDENCE

First consider the invariants in US (12) with $\sigma_1 < 0$. Only a single path

$$J_2 = \frac{1}{3} \sigma_1^2 \geq 0, J_3 = -2 (J_2/3)^{3/2} \leq 0, \quad (13)$$

in the (J_2, J_3) plane is covered, illustrated in Fig. 1.

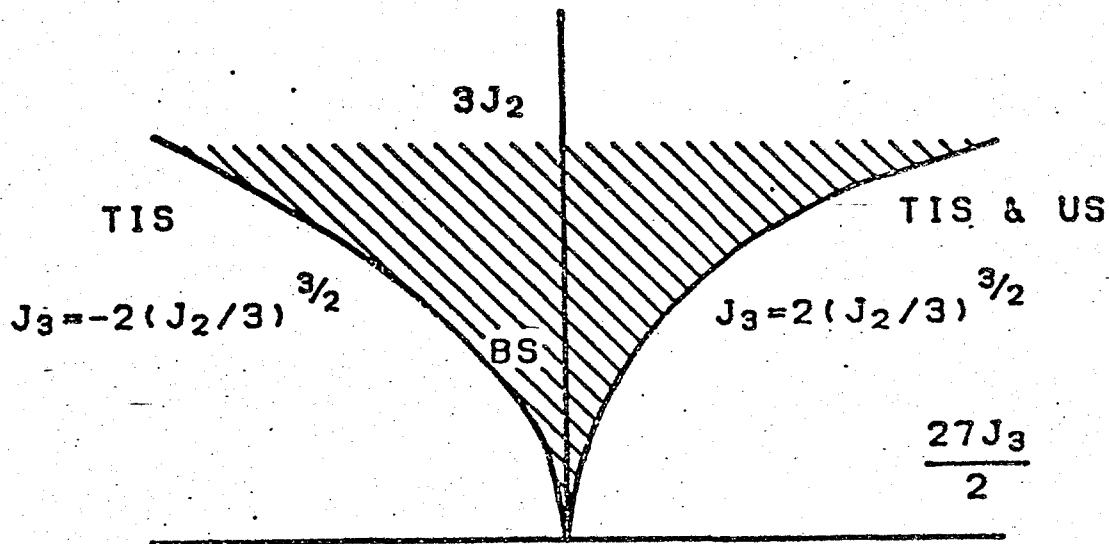

Now set

$$\sigma_2 = \eta \sigma_1, \quad \sigma_1 \leq 0, \quad \eta \geq 0, \quad (14)$$

so each positive constant η represents a ray in the compressive (σ_1, σ_2) quadrant. US is defined by $\eta = 0$. For TIS (10),

$$J_2 = \frac{1}{3} \sigma_1^2 (1-\eta)^2 \geq 0, \quad (15)$$

$$J_3 = \frac{2}{27} \sigma_1^3 (1-\eta)^3 = \pm 2(J_2/3)^{3/2} \text{ as } \eta \gtrless 1$$

Hence the US path (13) is covered for $\eta < 1$ ($|\sigma_2| < |\sigma_1|$); when $\eta > 1$, the alternative branch with $J_3 > 0$ is covered. This corresponds to uniaxial tension and is also shown in Fig. 1. Thus TIS extends the (J_2, J_3) domain of US for compressive stress, but both are confined to a curve. Note that the range of J_2 is maximum when $\eta = 0$; that is, for US.

In contrast, BS (11) yields

$$J_2 = \frac{1}{3} \sigma_1^2 (\eta^2 - \eta + 1) \geq 0, J_3 = \frac{1}{27} \sigma_1^3 (2\eta^3 - 3\eta^2 - 3\eta + 2), \quad (16)$$

which we will show are independent for independent σ_1 and η .

Eliminate σ_1 (< 0) between the relation (16) to obtain

$$J_3 = 2k(\eta) \left(\frac{J_2}{3} \right)^{3/2}, k(\eta) = \frac{\left(\eta - \frac{1}{2} \right) \left(\frac{9}{4} - \eta - \frac{1}{2} \right)^2}{\left(\frac{3}{4} + \left(\eta - \frac{1}{2} \right)^2 \right)^{3/2}}. \quad (17)$$

In (15), for any given value of J_2 there are precisely two possible values of J_3 , and these differ only in sign. In contrast, for any given J_2 in (17) there are a range of possible values of J_3 , defined by the range of $k(\eta)$.

For $\sigma_1 > 0$ the sign of k would be changed and

$\eta \geq 0 \Leftrightarrow \sigma_2 \geq 0$. At a fixed stress ratio $\eta > 0$, hence fixed k , as σ_1 is decreased from zero (17) describes a path in the (J_2, J_3) plane similar to one of the TIS branches (15), with $J_3 \geq 0$ as $k \geq 0$. Clearly k is antisymmetric about $\eta = \frac{1}{2}$ and has the following properties in $\eta \geq 0$:

$$k(0) = -1, k\left(\frac{1}{2}\right) = 0, k \rightarrow -1 \text{ as } \eta \rightarrow \infty, \quad (18)$$

$$k_{\min} = k(0) = -1, k_{\max} = k(1) = 1.$$

Thus the minimum value $k = -1$ occurs when $\sigma_2 = 0$ (US) and when $\sigma_1 \rightarrow 0$ at finite σ_2 (US in the lateral direction), and the maximum value $k = 1$ occurs when $\sigma_2 = \sigma_1$. Hence a practical range $0 \leq |\sigma_2| \leq |\sigma_1|$ covers the maximum possible range of k , and the magnitude of σ_1 determines the minimum range of J_2 covered, since $J_2 \geq \frac{1}{4} \sigma_1^2$ by (16)₁. The range of k is duplicated for $|\sigma_2| \geq |\sigma_1|$ which could provide a test of model consistency. The range limits $k = \pm 1$ give precisely the two TIS branches (15), corresponding to uniaxial tension and compression, so the BS domain for compressive stress shown in Fig. 1 is the complete sector

between the uniaxial tension and compression branches. In addition, of course, BS provides two deviatoric relations.

PRESSURE DEPENDENCE

Suppose that response depends on mean pressure p and J_2 . Restriction to compressive stress implies $p \geq 0$, so results are restricted to the first quadrant of the (p, J_2) plane. With $\sigma_2 = \eta \sigma_1 \leq 0$, $\eta \geq 0$, we have from (12), (10), and (11):

$$\text{US: } p = -\frac{1}{3} \sigma_2 \geq 0, \quad J_2 = \frac{1}{3} \sigma_1^2 = 3p^2, \quad (19)$$

$$\text{TIS: } p = -\frac{1}{3} \sigma_1(1 + 2\eta) \geq 0, \quad J_2 = \frac{1}{3} \sigma_1^2(1 - \eta)^2 = \mu(\eta)p^2, \quad (20)$$

$$\mu(\eta) = 3 \frac{1 - \eta}{1 + 2\eta} \geq 0,$$

$$\text{BS: } p = -\frac{1}{3} \sigma_1(1 + \eta) \geq 0, \quad J_2 = \frac{1}{3} \sigma_1^2(\eta^2 - \eta + 1) = \nu(\eta)p^2, \quad (21)$$

$$\nu(\eta) = \frac{3(1 - \eta + \eta^2)}{(1 + \eta)^2} \geq 0.$$


Again US covers only a single curve, shown in Fig. 2, but now both TIS and BS cover two-dimensional domains as $\mu(\eta)$ and $\nu(\eta)$ change continuously with variation of the stress ratio η . While both TIS and BS covered the uniaxial tension branch of the (J_2, J_3) plane, neither can approach this stress configuration in the (p, J_2) plane which would require $p < 0$.

From (20) and (21),

$$\frac{d\mu}{d\eta} \begin{cases} \leq 0 & \text{as } 0 \leq \eta < 1 \\ \geq 0 & \text{as } \eta > 1 \end{cases}, \quad (22)$$

$$\mu(0) = 3, \quad \mu_{\min} = \mu(1) = 0, \quad \mu \rightarrow \frac{3}{4} \text{ as } \eta \rightarrow \infty,$$

and

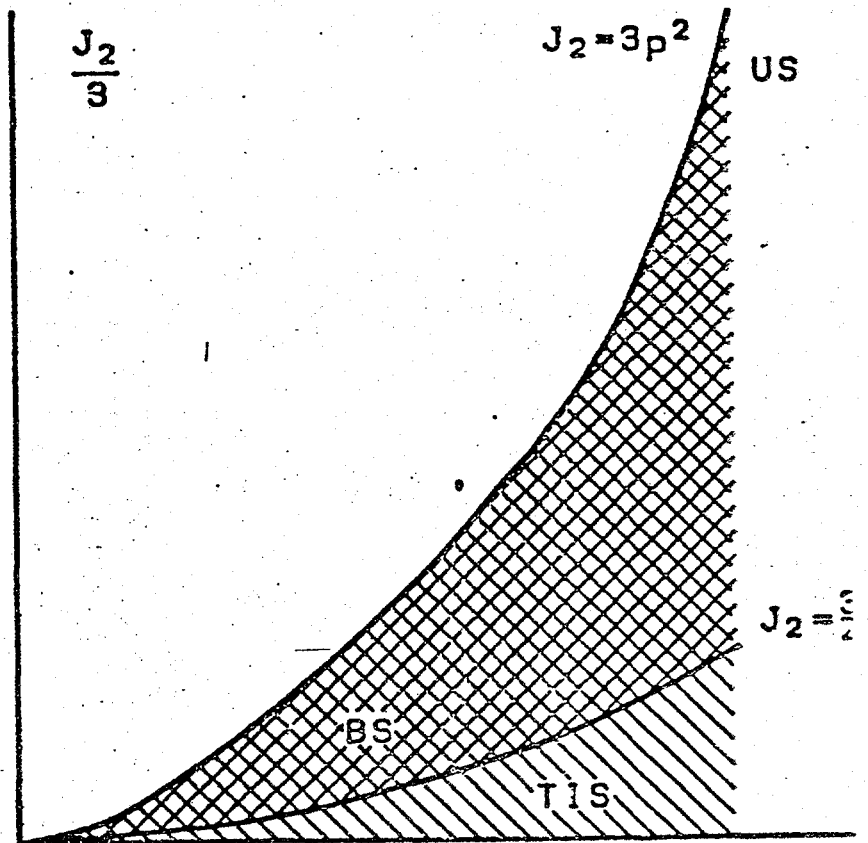

$$\frac{dv}{d\eta} \begin{cases} < 0 & \text{as } 0 \leq \eta < 1 \\ > 0 & \text{as } \eta > 1 \end{cases}, \quad (23)$$

$$v(0) = 3, \quad v_{\min} = v(1) = \frac{3}{4}, \quad \lambda \rightarrow 3 \text{ as } \eta \rightarrow \infty.$$

Now we see that TIS covers the sector between the US parabola $J_2 = 3p^2$ and the axis $J_2 = 0$ for $0 \leq |\sigma_2| \leq |\sigma_1|$, shown in Fig. 2, with the range $0 < \mu < \frac{3}{4}$ duplicated when $|\sigma_2| > |\sigma_1|$. However, BS covers only the smaller sector between $J_2 = 3p^2$ and $J_2 = \frac{3}{4} p^2$ for $0 \leq |\sigma_2| \leq |\sigma_1|$ shown in Fig. 2, with the same range $\frac{3}{4} < \nu < 3$ duplicated when $|\sigma_2| > |\sigma_1|$. This is striking reversal of the domains covered by TIS and BS in the (J_2, J_3) plane, but it is only BS that yields the two deviatoric relations. The excluded domains $J_2 > 3p^2$ and $J_2 < \frac{3}{4} p^2$ are of practical significance and cannot be dismissed in model construction. It can be shown that allowing axial tension $\sigma_1 > 0$ with lateral compression $\sigma_2 < 0$, $\eta < 0$,

extends the domains of both TIS and BS to $J_2 = 3p^2$ in $p < 0$, but the domain $0 \leq J_2 < \frac{3}{4}$ in $p > 0$ is still excluded in BS. Both axial tension and lateral tension are required in BS to obtain complete coverage in $p > 0$.

ACKNOWLEDGEMENTS

The work reported in this paper is a part of the project "The Mechanical Properties of Sea Ice", and the financial support of the participants, Amoco Production Co., ARCO Oil and Gas Co., Chevron Oil Field Research Co., Exxon Production Research Co., Gulf Research and Development Co., Mitsui Engineering and Ship Building Co., Ltd., Shell Development Co., Sohio Petroleum Co., Texaco, Inc., and U. S. Geological Survey is gratefully acknowledged.

REFERENCES

1. MORLAND, L. W., Constitutive laws for ice, Cold Reg. Sci. Tech., 1 (1979), pp. 101 - 108.
2. MORLAND, L. W. & SPRING, U., Viscoelastic fluid relations for the deformation of ice, Cold Regions Science and Technology, 4 (1981), pp. 255 - 268.
3. MORLAND, L. W. & SPRING, U., Single integral representations for nonlinear viscoelastic solids, Mechanics of Materials, 1 (1982), pp. 161 - 170.
4. SPRING, U. & MORLAND, L. W., Viscoelastic solid relations for the deformation of ice, Cold Regions Science and Technology, 5 (1982a), pp. 221 - 234.
5. SPRING, U. & MORLAND, L. W., Integral representations for viscoelastic deformation of ice, Cold Regions Science and Technology (in press) (1982b).
6. NAWWAR, A. M. & PURVES, W. F., Triaxial compressive strength of laboratory grown saline ice. November 1977, ARC TEC Canada, Ltd. Consultant Report.

E-4/Earle

Fig. 1 - Shear invariant domains for compressive stress.

Fig. 2 - Pressure-shear invariant domains
for compressive stress.